



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2126942
 Component
2 Differential
 Fluid
PETRO CANADA TRAXON SYNTHETIC 75W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0125013	PCA0119523	PCA0115446
Sample Date		Client Info		26 Apr 2024	24 Feb 2024	23 Dec 2023
Machine Age	mls	Client Info		196929	176613	164773
Oil Age	mls	Client Info		196929	0	0
Filter Age	mls	Client Info		196929	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	221	210	199
Chromium	ppm	ASTM D5185m	>10	3	3	3
Nickel	ppm	ASTM D5185m	>10	6	6	6
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	4	4
Lead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>100	3	2	2
Tin	ppm	ASTM D5185m	>10	1	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	70	70	74
Potassium	ppm	ASTM D5185m	>20	4	4	<1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	7	7
Boron	ppm	ASTM D5185m	328	124	123	129
Barium	ppm	ASTM D5185m	1	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		15	14	14
Magnesium	ppm	ASTM D5185m	1	2	2	0
Calcium	ppm	ASTM D5185m	7	<1	0	1
Phosphorus	ppm	ASTM D5185m	1145	1128	1151	1045
Zinc	ppm	ASTM D5185m	3	20	20	0
Sulfur	ppm	ASTM D5185m	17909	23597	24840	26649
Visc @ 40°C	cSt	ASTM D445	99.6	95.5	95.6	95.1

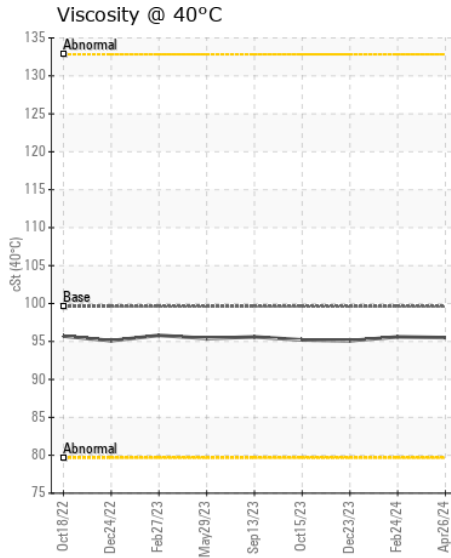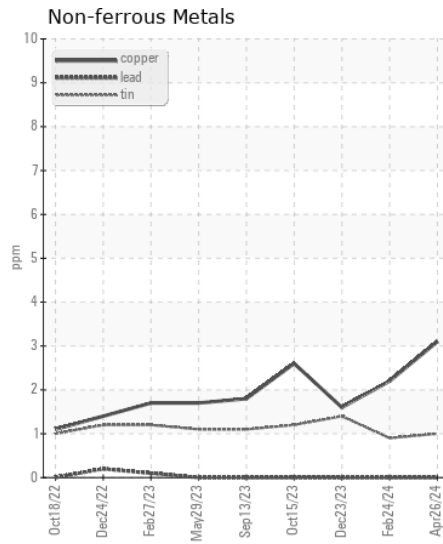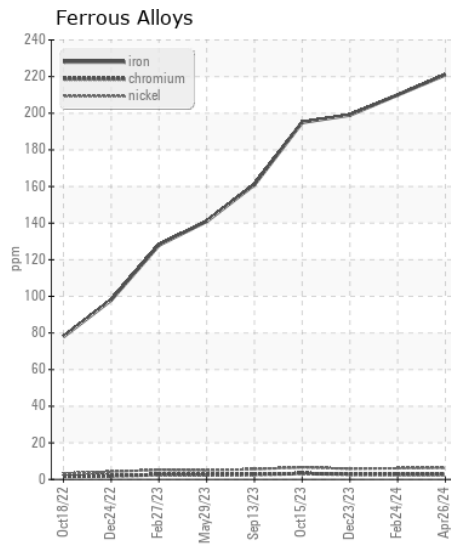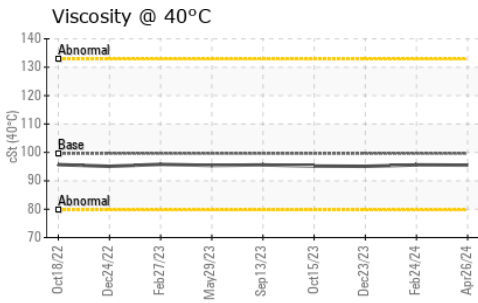

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0125013
Lab Number : 06220117
Unique Number : 11098314
Test Package : FLEET

Received : 25 Jun 2024
Tested : 26 Jun 2024
Diagnosed : 26 Jun 2024 - Wes Davis

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: