



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1926732
 Component
1 Differential
 Fluid
PETRO CANADA DEXRON GEAR OIL 75W-90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0121398	PCA0094894	PCA0083030
Sample Date		Client Info		17 Mar 2024	21 Mar 2023	01 Nov 2022
Machine Age	mls	Client Info		307344	233246	213835
Oil Age	mls	Client Info		307344	233246	213835
Filter Age	mls	Client Info		307344	233246	213835
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	225	184	198
Chromium	ppm	ASTM D5185m	>10	1	2	2
Nickel	ppm	ASTM D5185m	>10	4	4	4
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	2
Lead	ppm	ASTM D5185m	>25	4	4	5
Copper	ppm	ASTM D5185m	>100	60	54	61
Tin	ppm	ASTM D5185m	>10	2	3	3
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	27	24	24
Potassium	ppm	ASTM D5185m	>20	2	2	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		11	10	11
Boron	ppm	ASTM D5185m	60	231	236	276
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		12	13	12
Magnesium	ppm	ASTM D5185m	0	1	3	0
Calcium	ppm	ASTM D5185m	0	0	28	16
Phosphorus	ppm	ASTM D5185m	1300	1392	1374	1306
Zinc	ppm	ASTM D5185m	20	20	14	12
Sulfur	ppm	ASTM D5185m	24100	21315	27610	25056
Visc @ 40°C	cSt	ASTM D445	88.50	99.5	100	101

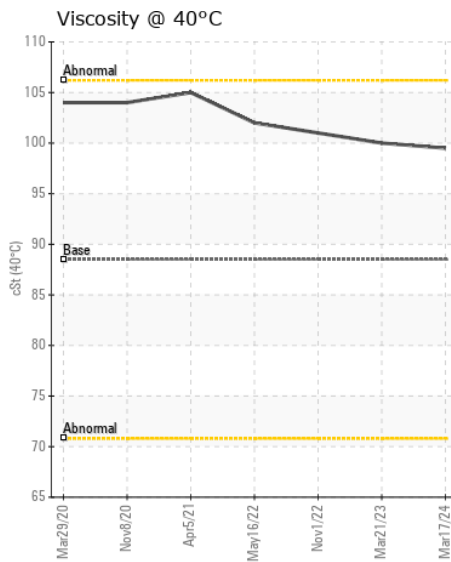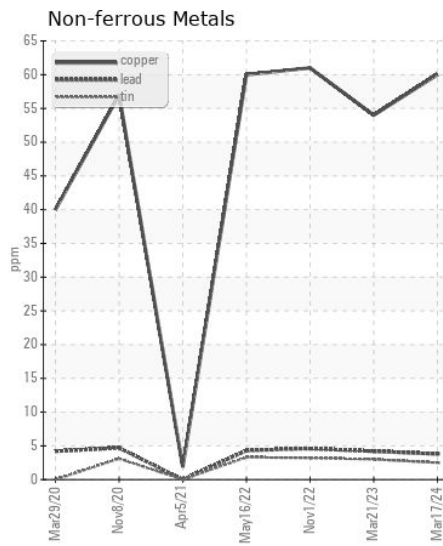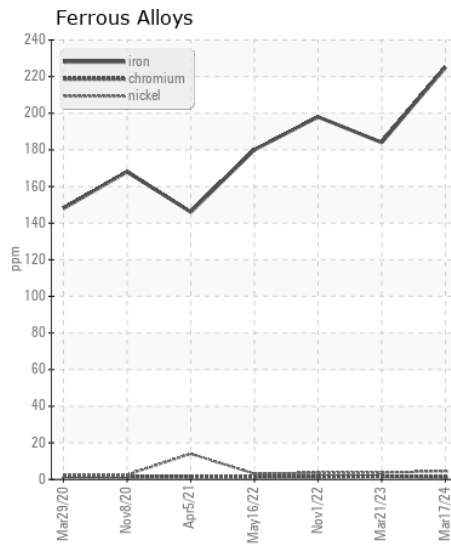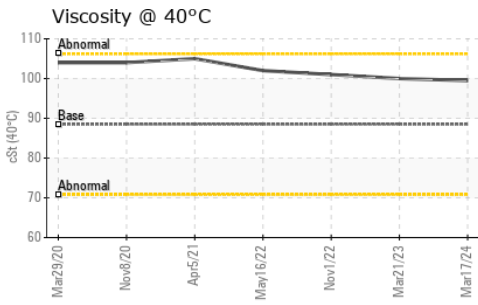

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0121398
Lab Number : 06220120
Unique Number : 11098317
Test Package : FLEET

Received : 25 Jun 2024
Tested : 26 Jun 2024
Diagnosed : 26 Jun 2024 - Wes Davis

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: