



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
2026854
 Component
Front Differential
 Fluid
GEAR OIL SAE 75W90 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0119540	PCA0089338	PCA0065959
Sample Date		Client Info		21 Mar 2024	07 Jan 2023	18 Jan 2022
Machine Age	mls	Client Info		0	170047	88451
Oil Age	mls	Client Info		0	170047	88451
Filter Age	mls	Client Info		0	0	88451
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	247	215	167
Chromium	ppm	ASTM D5185m	>10	1	2	2
Nickel	ppm	ASTM D5185m	>10	5	4	4
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	2	0
Lead	ppm	ASTM D5185m	>25	8	7	5
Copper	ppm	ASTM D5185m	>100	84	88	56
Tin	ppm	ASTM D5185m	>10	8	9	5
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	45	36	30
Potassium	ppm	ASTM D5185m	>20	3	2	2
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		9	10	10
Boron	ppm	ASTM D5185m	400	234	272	312
Barium	ppm	ASTM D5185m	200	<1	<1	2
Molybdenum	ppm	ASTM D5185m	12	0	<1	<1
Manganese	ppm	ASTM D5185m		13	14	13
Magnesium	ppm	ASTM D5185m	12	2	<1	<1
Calcium	ppm	ASTM D5185m	150	0	11	14
Phosphorus	ppm	ASTM D5185m	1650	1450	1343	1436
Zinc	ppm	ASTM D5185m	125	20	18	8
Sulfur	ppm	ASTM D5185m	22500	22888	26877	20836
Visc @ 40°C	cSt	ASTM D445	109	104	104	105

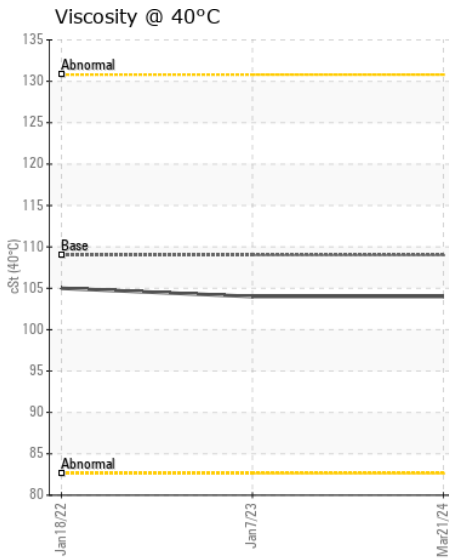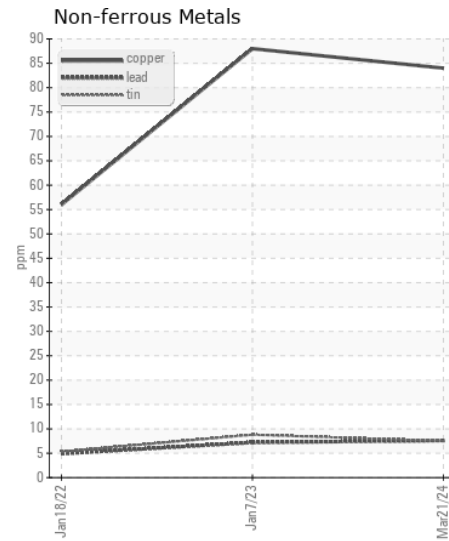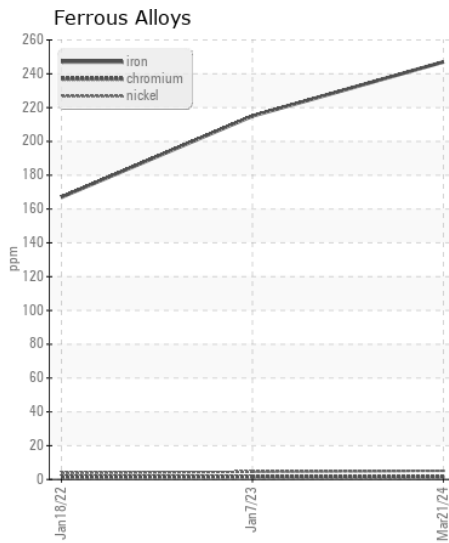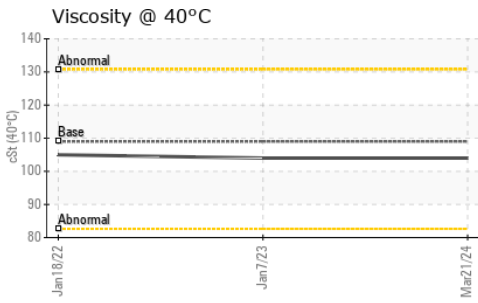

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0119540
Lab Number : 06220131
Unique Number : 11098328
Test Package : FLEET

PERDUE FARMS - GEORGETOWN
 20621 SAVANAH RD
 GEORGETOWN, DE
 US 19947
 Contact: ROBERT LOCKWOOD
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: