



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**1926746**  
 Component  
**Differential**  
 Fluid  
**GEAR OIL SAE 75W90 (--- QTS)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

**WEAR**

All component wear rates are normal.

**CONTAMINATION**

There is no indication of any contamination in the oil.

**FLUID CONDITION**





The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0121379</b>	PCA0116199	PCA0108186
Sample Date		Client Info		<b>19 Mar 2024</b>	15 Jan 2024	31 Oct 2023
Machine Age	mls	Client Info		<b>323140</b>	355142	335919
Oil Age	mls	Client Info		<b>323140</b>	355142	335919
Filter Age	mls	Client Info		<b>323140</b>	355142	335919
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Filter Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

Iron	ppm	ASTM D5185m	>500	<b>214</b>	240	233
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m	>10	<b>11</b>	15	15
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	3	2
Lead	ppm	ASTM D5185m	>25	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>100	<b>3</b>	2	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

Silicon	ppm	ASTM D5185m	>75	<b>22</b>	38	39
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	1
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	LIGHT
Debris	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

Sodium	ppm	ASTM D5185m		<b>5</b>	5	6
Boron	ppm	ASTM D5185m	400	<b>260</b>	252	267
Barium	ppm	ASTM D5185m	200	<b>1</b>	0	<1
Molybdenum	ppm	ASTM D5185m	12	<b>1</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>10</b>	12	12
Magnesium	ppm	ASTM D5185m	12	<b>1</b>	0	0
Calcium	ppm	ASTM D5185m	150	<b>0</b>	0	7
Phosphorus	ppm	ASTM D5185m	1650	<b>1399</b>	1342	1375
Zinc	ppm	ASTM D5185m	125	<b>23</b>	4	15
Sulfur	ppm	ASTM D5185m	22500	<b>22717</b>	25074	22435
Visc @ 40°C	cSt	ASTM D445	109	<b>115</b>	105	104

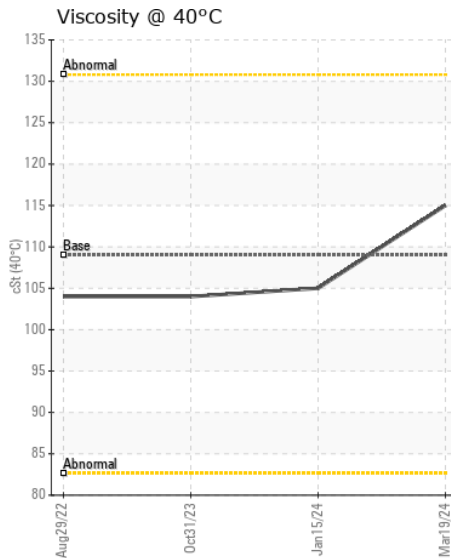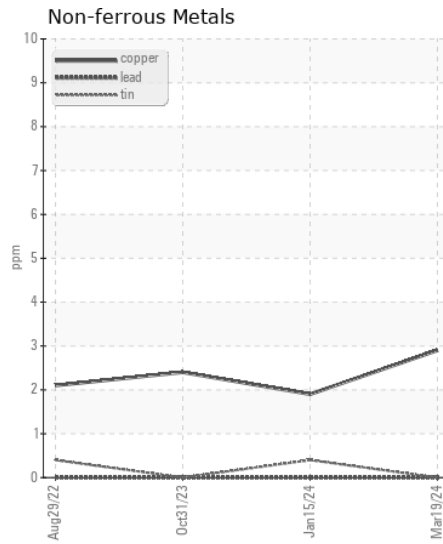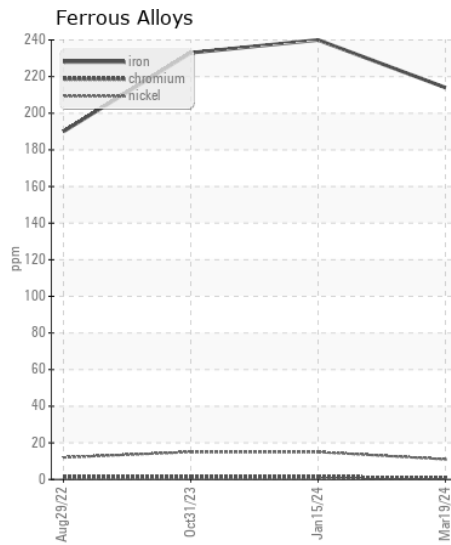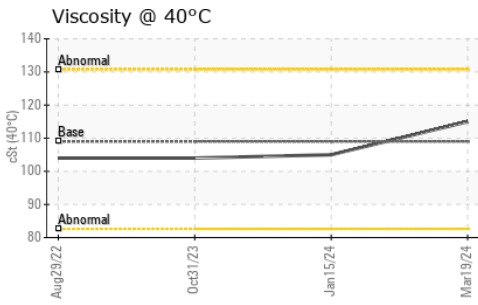

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0121379  
**Lab Number** : 06220147  
**Unique Number** : 11098344  
**Test Package** : FLEET

**Received** : 25 Jun 2024  
**Tested** : 26 Jun 2024  
**Diagnosed** : 27 Jun 2024 - Sean Felton

**PERDUE FARMS - GEORGETOWN**  
 20621 SAVANAH RD  
 GEORGETOWN, DE  
 US 19947  
 Contact: ROBERT LOCKWOOD  
 Robert.Lockwood@Perdue.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: