



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A40G 341237
Component
Bogie/Center Axle
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011196	ASC0010494	VCP436540
Sample Date		Client Info		19 Jun 2024	18 Apr 2024	23 Jan 2024
Machine Age	hrs	Client Info		9164	8907	8360
Oil Age	hrs	Client Info		2000	1000	0
Filter Age	hrs	Client Info		0	1000	0
Oil Changed		Client Info		Not Changd	Not Changd	Changed
Filter Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
Iron	ppm	ASTM D5185m	>900	205	257	282
Chromium	ppm	ASTM D5185m	>20	2	3	2
Nickel	ppm	ASTM D5185m	>10	0	0	2
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	4	4	7
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>150	<1	<1	6
Tin	ppm	ASTM D5185m	>20	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185m	>50	22	26	25
Potassium	ppm	ASTM D5185m	>20	3	<1	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	MODER	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m		4	2	6
Boron	ppm	ASTM D5185m		252	307	183
Barium	ppm	ASTM D5185m		0	<1	<1
Molybdenum	ppm	ASTM D5185m		0	<1	2
Manganese	ppm	ASTM D5185m		2	2	4
Magnesium	ppm	ASTM D5185m		<1	1	16
Calcium	ppm	ASTM D5185m		13	18	121
Phosphorus	ppm	ASTM D5185m		2440	2514	1860
Zinc	ppm	ASTM D5185m		3	9	91
Sulfur	ppm	ASTM D5185m		33589	33710	21302
Visc @ 40°C	cSt	ASTM D445		52.6	52.3	49.5

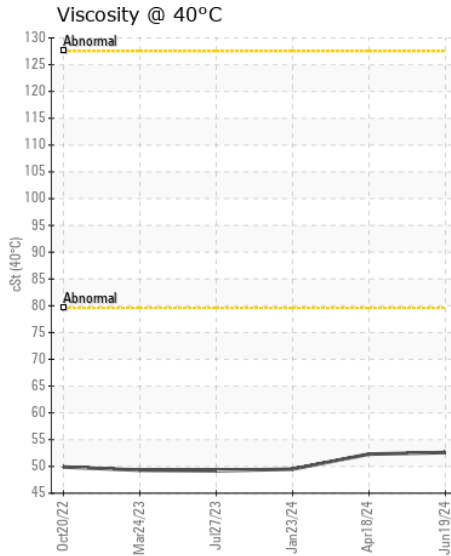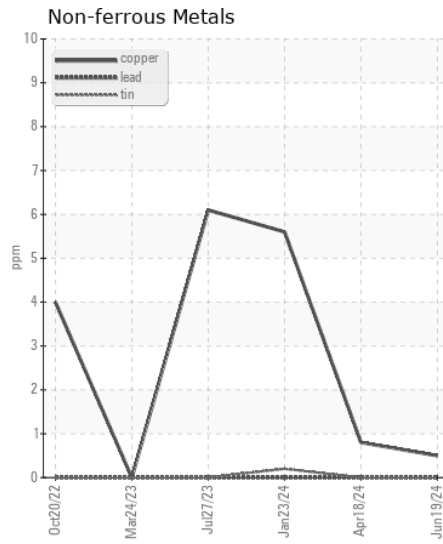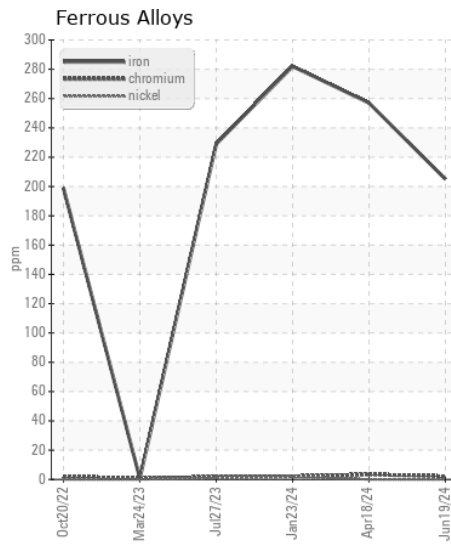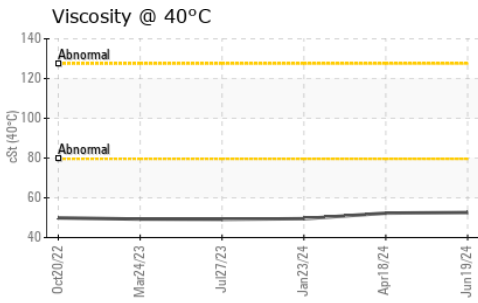

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0011196
Lab Number : 06220181
Unique Number : 11098378
Test Package : CONST
Received : 25 Jun 2024
Tested : 26 Jun 2024
Diagnosed : 26 Jun 2024 - Wes Davis

HANSON SOUTHEAST
 NC HWY 117
 ERWIN, NC
 US 28339
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: