



WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**2327156**  
 Component  
**Transmission**  
 Fluid  
 {not provided} (--- QTS)

**RECOMMENDATION**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0121393	---	---
Sample Date		Client Info		08 Apr 2024	---	---
Machine Age	mls	Client Info		18418	---	---
Oil Age	mls	Client Info		18418	---	---
Filter Age	mls	Client Info		18418	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				ABNORMAL	---	---

**WEAR**

Moderate concentration of visible metal present. All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	28	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>50	<1	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>200	28	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	▲ MODER	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	42	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		28	---	---
Magnesium	ppm	ASTM D5185m		<1	---	---
Calcium	ppm	ASTM D5185m		817	---	---
Phosphorus	ppm	ASTM D5185m		692	---	---
Zinc	ppm	ASTM D5185m		0	---	---
Sulfur	ppm	ASTM D5185m		5426	---	---
Visc @ 40°C	cSt	ASTM D445		104	---	---

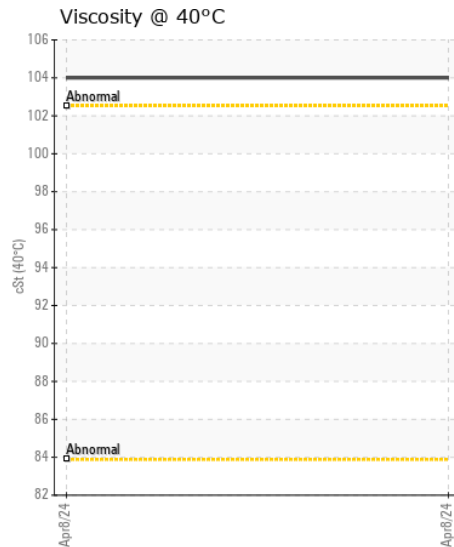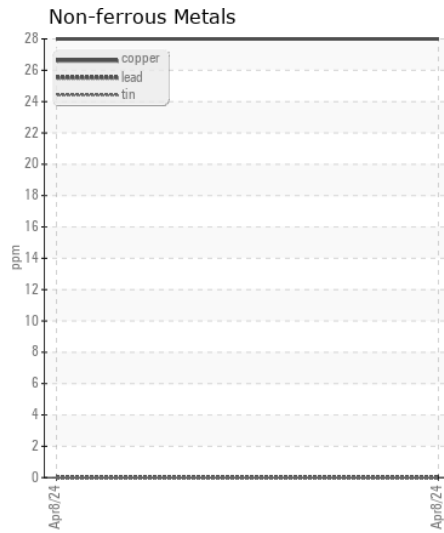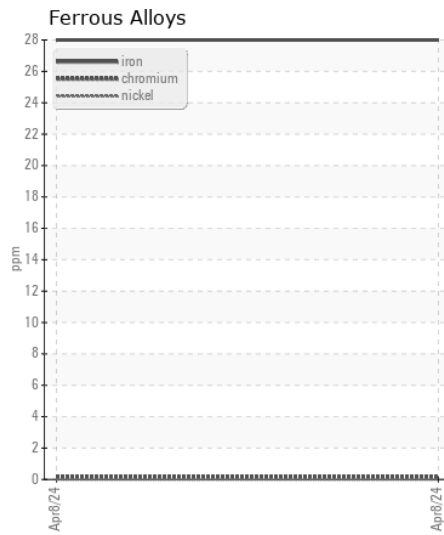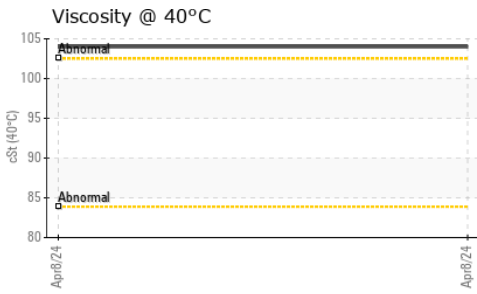

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : PCA0121393

**Lab Number** : 06220219

**Unique Number** : 11098416

**Test Package** : FLEET

**Received** : 25 Jun 2024

**Tested** : 26 Jun 2024

**Diagnosed** : 27 Jun 2024 - Sean Felton

**PERDUE FARMS - GEORGETOWN**

20621 SAVANAH RD

GEORGETOWN, DE

US 19947

Contact: ROBERT LOCKWOOD

Robert.Lockwood@Perdue.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)