



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[PO: VERBAL KEANAN]

Machine Id
RED GIANT 20W40

Component
New (Unused) Oil

Fluid
{not provided} (--- GAL)

RECOMMENDATION

This is a baseline read-out on the submitted sample. Please note that this is a corrected copy for laboratory data updates to ICP results.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LW06220259	---	---
Sample Date		Client Info		25 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR









Iron	ppm	ASTM D5185m		0	---	---
Chromium	ppm	ASTM D5185m		0	---	---
Nickel	ppm	ASTM D5185m		<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		2	---	---
Lead	ppm	ASTM D5185m		<1	---	---
Copper	ppm	ASTM D5185m		0	---	---
Tin	ppm	ASTM D5185m		<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Silicon	ppm	ASTM D5185m		4	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method		NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m		48	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		41	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		3443	---	---
Phosphorus	ppm	ASTM D5185m		0	---	---
Zinc	ppm	ASTM D5185m		7	---	---
Sulfur	ppm	ASTM D5185m		3500	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		10.43	---	---
Visc @ 40°C	cSt	ASTM D445		137.6	---	---
Visc @ 100°C	cSt	ASTM D445		15.2	---	---
Viscosity Index (VI)	Scale	ASTM D2270		112	---	---

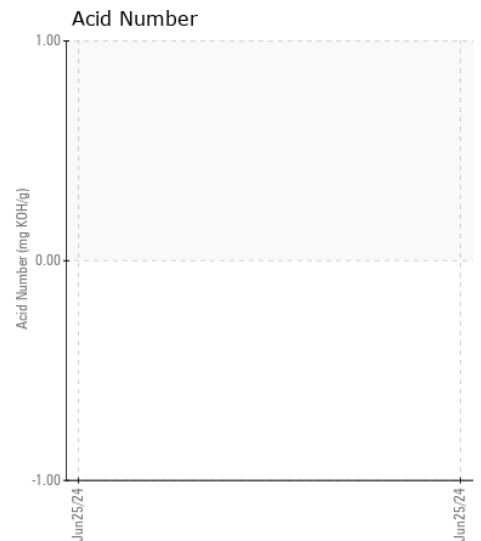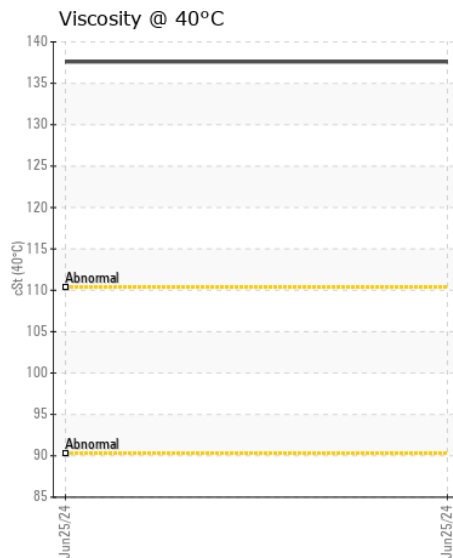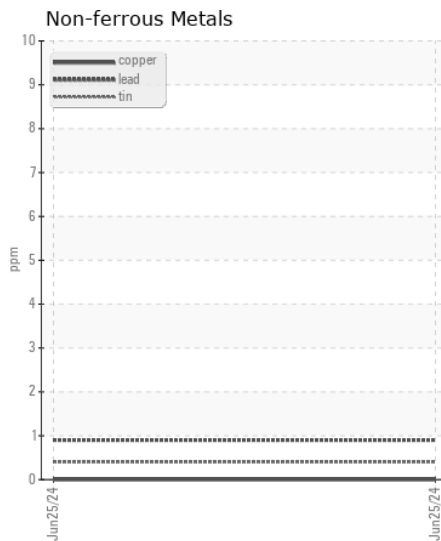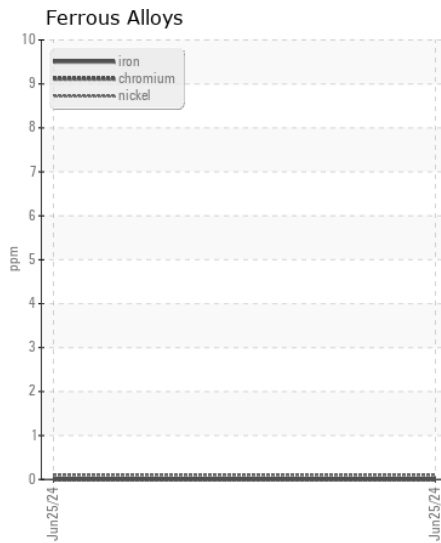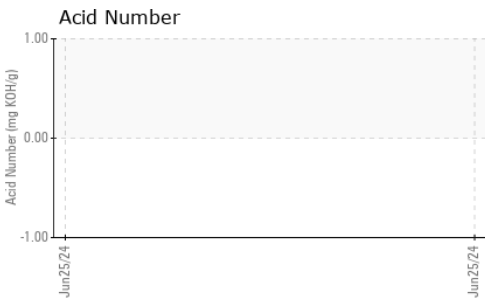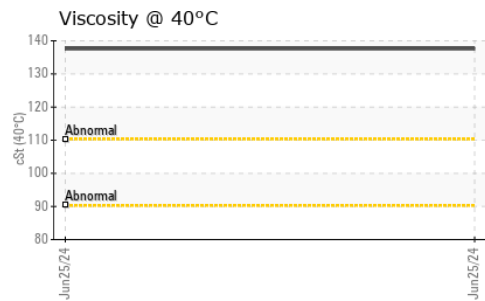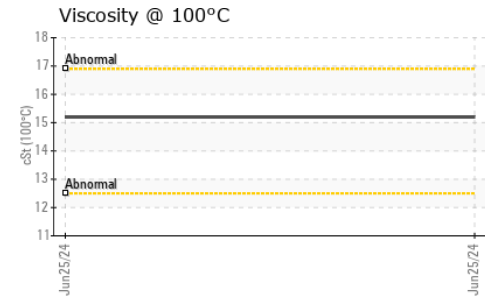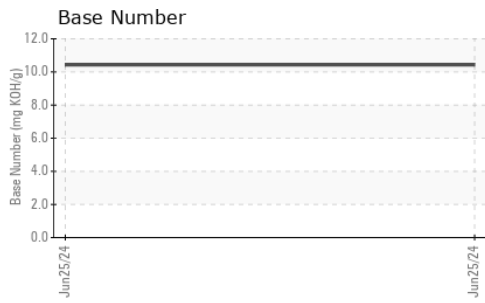

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : LW06220259

Lab Number : 06220259

Unique Number : 11098456

Test Package : MOB 2 (Additional Tests: FT-IR, ICP-NewOil, KV100, PrtCount, TBN, VI)

Received : 25 Jun 2024

Tested : 01 Jul 2024

Diagnosed : 01 Jul 2024 - Jonathan Hester

LEAHY-WOLF COMPANY
1724 W ARMITAGE COURT, SUITE A

ADDISON, IL

US 60101

Contact: TERRY LONG

terrylong@leahywolf.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

F: