



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
Rotella T4 15w40 Tank
 Component
New (Unused) Oil
 Fluid
SHELL ROTELLA T4 15W40 (--- GAL)

RECOMMENDATION

This is a baseline read-out on the submitted sample. (Customer Sample Comment: Oil sample from tank)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PE0002315	---	---
Sample Date		Client Info		21 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR










Iron	ppm	ASTM D5185m		<1	---	---
Chromium	ppm	ASTM D5185m		0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		<1	---	---
Lead	ppm	ASTM D5185m		<1	---	---
Copper	ppm	ASTM D5185m		0	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Silicon	ppm	ASTM D5185m		5	---	---
Potassium	ppm	ASTM D5185m	>20	7	---	---
Water		WC Method		NEG	---	---
Soot %	%	*ASTM D7844		0	---	---
Nitration	Abs/cm	*ASTM D7624		4.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415		19.7	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---

FLUID CONDITION

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m		164	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		4	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		23	---	---
Calcium	ppm	ASTM D5185m		2437	---	---
Phosphorus	ppm	ASTM D5185m		1051	---	---
Zinc	ppm	ASTM D5185m		1220	---	---
Sulfur	ppm	ASTM D5185m		4482	---	---
Oxidation	Abs/.1mm	*ASTM D7414		15.2	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	9.66	---	---
Visc @ 40°C	cSt	ASTM D445	118	107.5	---	---
Visc @ 100°C	cSt	ASTM D445	15	14.75	---	---
Viscosity Index (VI)	Scale	ASTM D2270	133	141	---	---

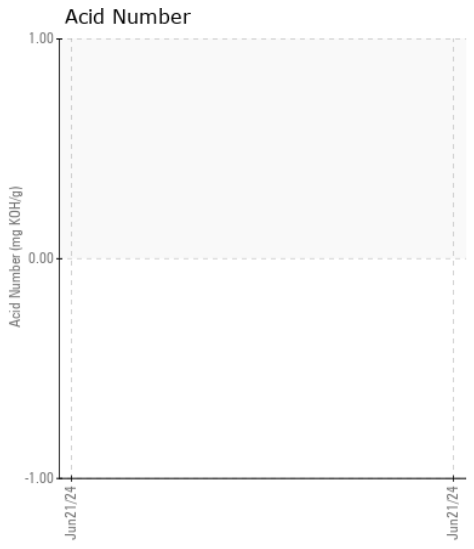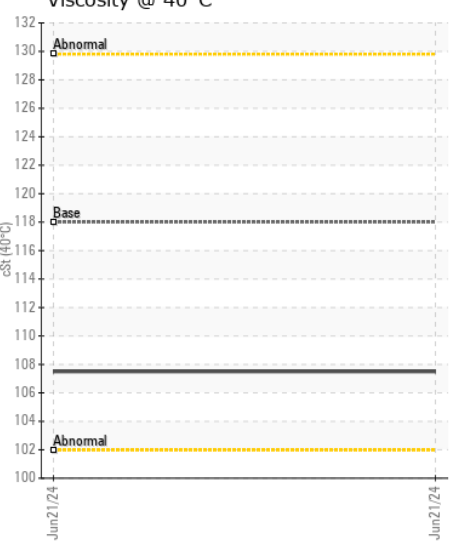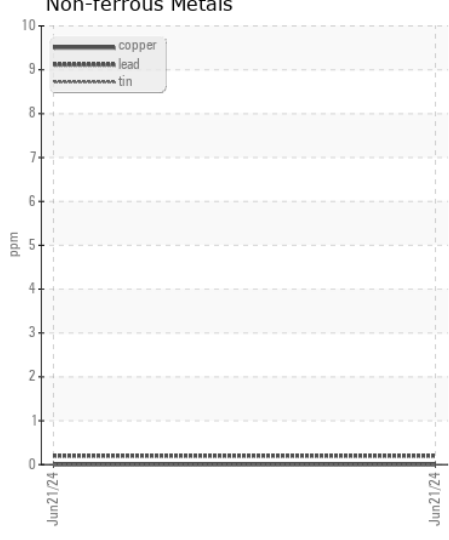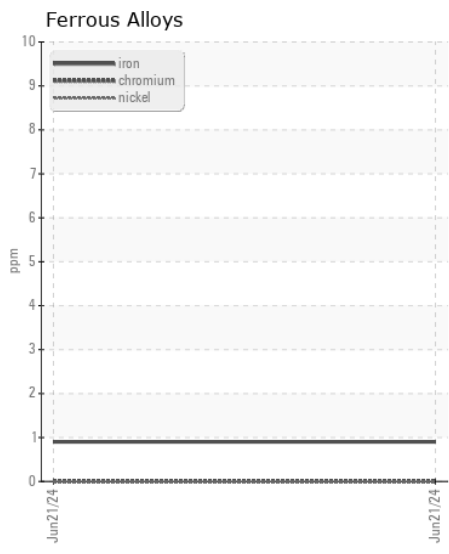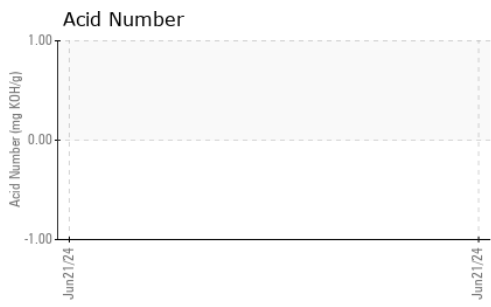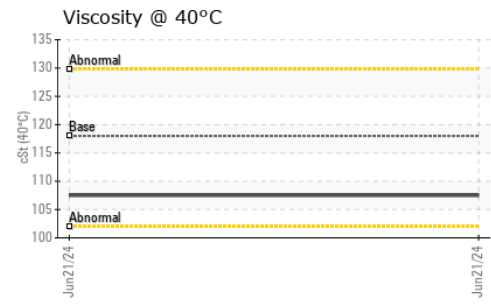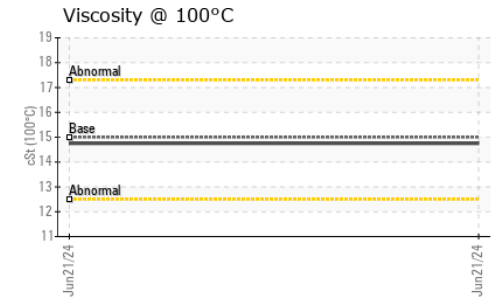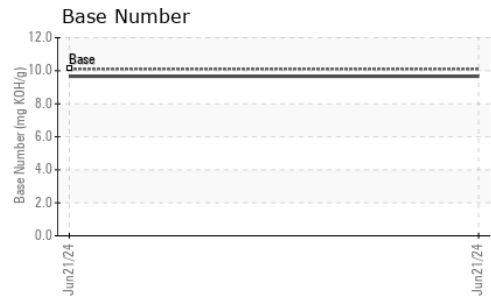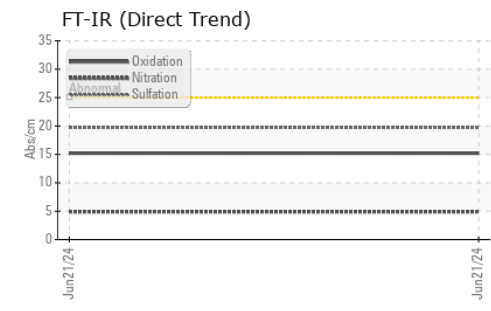

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0002315 **Received** : 25 Jun 2024
Lab Number : 06220260 **Tested** : 28 Jun 2024
Unique Number : 11098457 **Diagnosed** : 28 Jun 2024 - Jonathan Hester

BUCKS LOGGING
 2160 US-12
 ETHEL, WA
 US 98542

Test Package : CONST (Additional Tests: FT-IR, ICP, KV100, KV40, SCREEN, TAN Man, TBN, VI)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: ROBERT
 bucksloggingshop@gmail.com
 T: (360)520-3198
 F: