



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Area
Stoneway Concrete Renton
 Machine Id
[Stoneway Concrete Renton] 10-512
 Component
Hydraulic System
 Fluid
CHEVRON RANDO HD 68 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PE0003273	PE0002160	PE0001826
Sample Date		Client Info		17 Jun 2024	25 Sep 2023	08 Mar 2023
Machine Age	hrs	Client Info		13297	11781	10434
Oil Age	hrs	Client Info		13297	11781	0
Filter Age	hrs	Client Info		1516	1347	1489
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				ATTENTION	ATTENTION	ATTENTION

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	6	7	7
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	1
Lead	ppm	ASTM D5185m	>10	0	<1	<1
Copper	ppm	ASTM D5185m	>75	10	10	10
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	2	3	3
Potassium	ppm	ASTM D5185m	>20	<1	<1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	588	7240	2678
Particles >6µm		ASTM D7647	>1300	150	1159	301
Particles >14µm		ASTM D7647	>160	15	28	8
Particles >21µm		ASTM D7647	>40	3	3	3
Particles >38µm		ASTM D7647	>10	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	16/14/11	20/17/12	19/15/10
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type. The AN level is acceptable for this fluid.

Sodium	ppm	ASTM D5185m		1	0	<1
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m		0	0	4
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m		1	2	10
Calcium	ppm	ASTM D5185m		39	34	64
Phosphorus	ppm	ASTM D5185m		319	317	322
Zinc	ppm	ASTM D5185m		362	389	402
Sulfur	ppm	ASTM D5185m		1008	1022	1067
Acid Number (AN)	mg KOH/g	ASTM D8045		0.35	0.39	0.38
Visc @ 40°C	cSt	ASTM D445	64.6	51.8	53.5	55.0

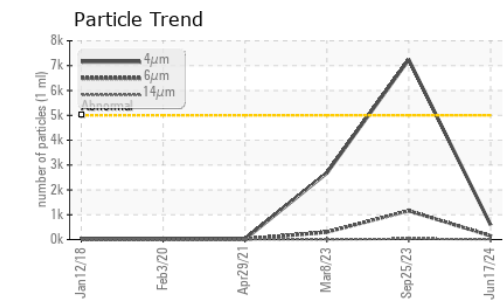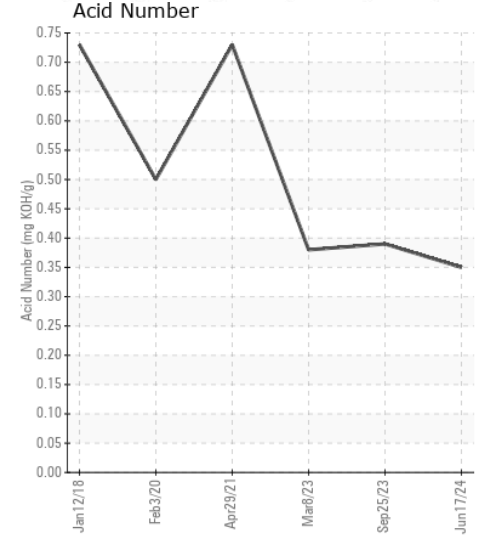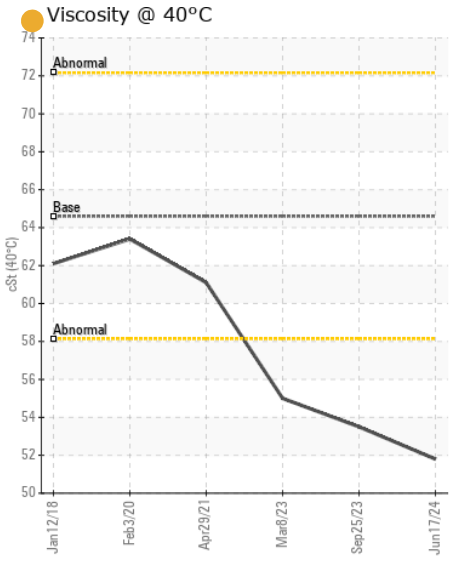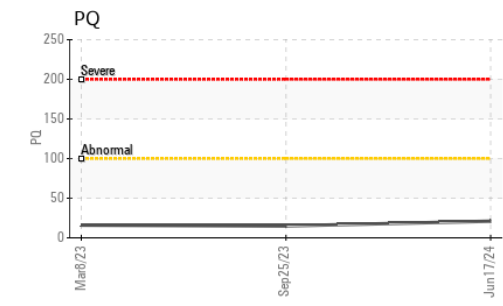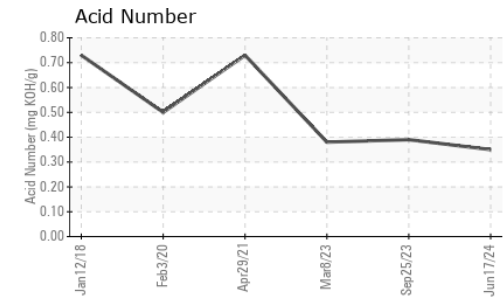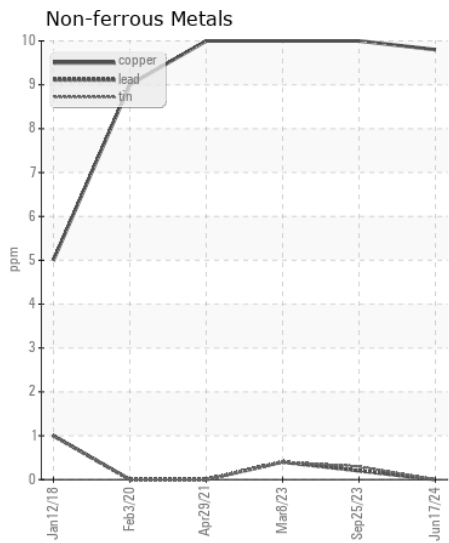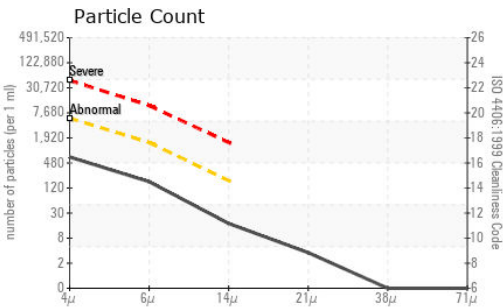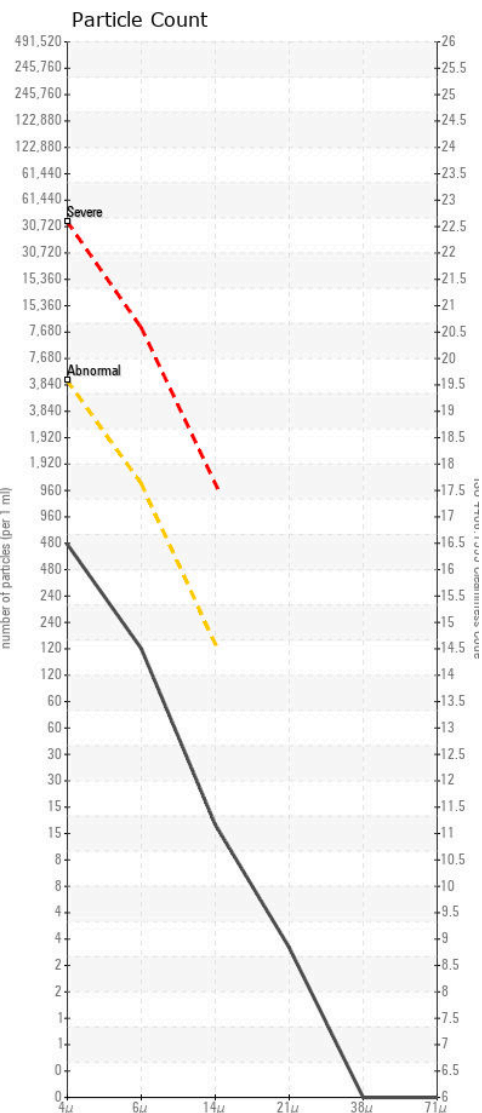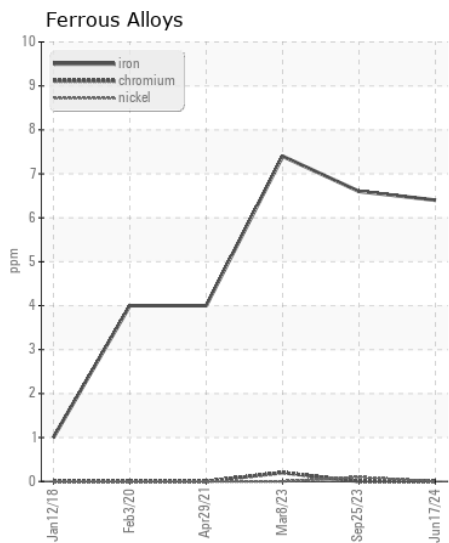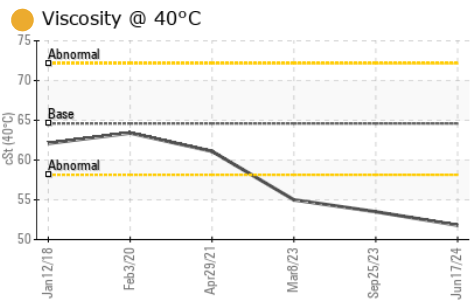

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0003273
Lab Number : 06220350
Unique Number : 11098547
Test Package : CONST (Additional Tests: ICP, KV40, PQ, PrtCount, SCREEN)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Gary Merlino Construction - Off Road Shop
 9125 10TH AVE SOUTH
 SEATTLE, WA
 US 98108
 Contact: Tony Wytko
 oilsamples@gmccinc.com
 T:
 F: