



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH30M 1253-118648
Component
Transmission (Manual)
Fluid
LIEBHERR MOTOROIL 10W-40 (3 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0272217	LH0244512	LH0207388
Sample Date		Client Info		17 Jun 2024	07 Mar 2023	09 Nov 2021
Machine Age	hrs	Client Info		2346	1690	952
Oil Age	hrs	Client Info		656	738	952
Filter Age	hrs	Client Info		0	0	952
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	None
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	13	16	18
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>7	0	0	<1
Aluminum	ppm	ASTM D5185m	>25	3	3	4
Lead	ppm	ASTM D5185m	>45	1	<1	1
Copper	ppm	ASTM D5185m	>225	90	121	29
Tin	ppm	ASTM D5185m	>10	1	1	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	MODER	NONE

CONTAMINATION

There is no indication of any contamination in the fluid.


Silicon	ppm	ASTM D5185m	>125	4	3	5
Potassium	ppm	ASTM D5185m	>20	3	2	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		26	38	49
Boron	ppm	ASTM D5185m	245	93	<1	2
Barium	ppm	ASTM D5185m	0	<1	0	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1	<1
Manganese	ppm	ASTM D5185m	<1	12	15	8
Magnesium	ppm	ASTM D5185m	36	345	9	13
Calcium	ppm	ASTM D5185m	4401	1865	1850	3156
Phosphorus	ppm	ASTM D5185m	1067	1289	1660	1019
Zinc	ppm	ASTM D5185m	1183	748	691	1146
Sulfur	ppm	ASTM D5185m	2591	15201	23812	7642


Ferrous Alloys

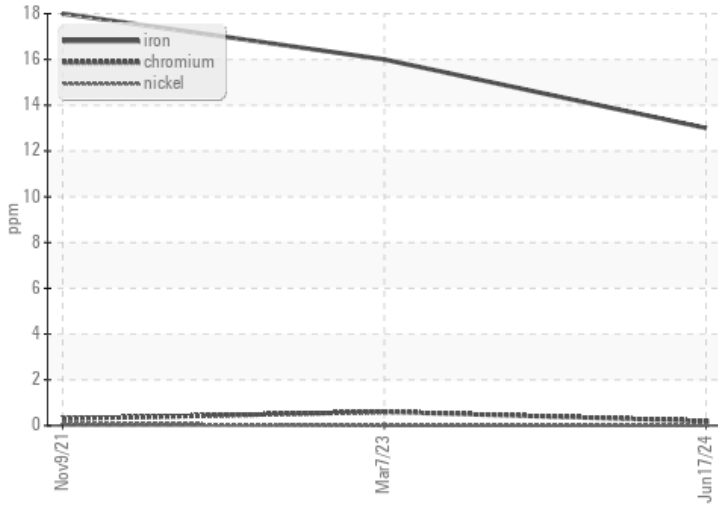

Non-ferrous Metals

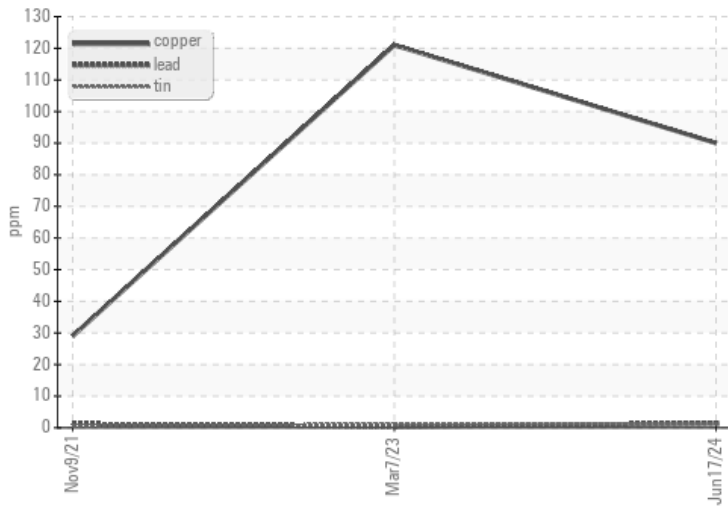

Viscosity @ 40°C

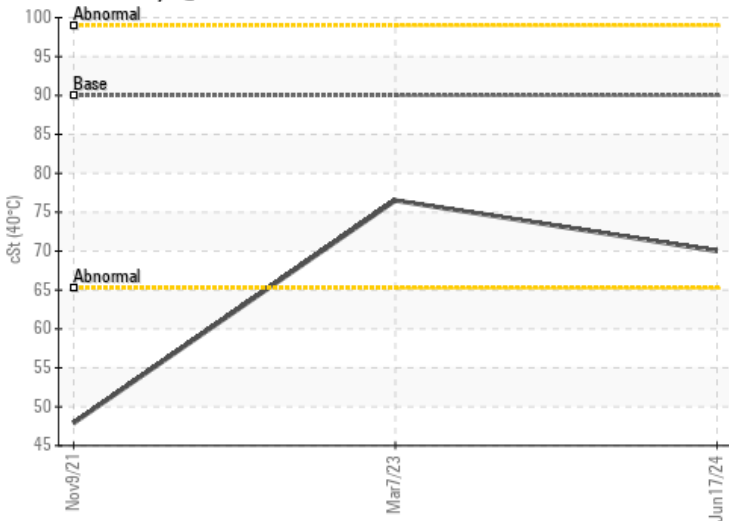

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0272217
Lab Number : 06220470
Unique Number : 11098667
Test Package : CONST

Received : 25 Jun 2024
Tested : 26 Jun 2024
Diagnosed : 27 Jun 2024 - Angela Borella

JR VINAGRO
 2208 PLAINFIELD PIKE
 JOHNSTON, RI
 US 02919
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: