



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
1216
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0827665	WC0827764	WC0589812
Sample Date		Client Info		14 Jun 2024	15 Sep 2023	16 Mar 2022
Machine Age	mls	Client Info		199608	182786	130912
Oil Age	mls	Client Info		6348	0	1900
Filter Age	mls	Client Info		6348	0	1900
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	48	99	70
Chromium	ppm	ASTM D5185m	>20	<1	2	2
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	18	▲ 26	14
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	2	1	2
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	9	9	6
Potassium	ppm	ASTM D5185m	>20	6	6	4
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.9	0.5	1.1
Nitration	Abs/cm	*ASTM D7624	>20	13.4	15.3	13.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.0	35.0	31.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	1
Boron	ppm	ASTM D5185m	250	13	23	2
Barium	ppm	ASTM D5185m	10	<1	0	0
Molybdenum	ppm	ASTM D5185m	100	61	62	5
Manganese	ppm	ASTM D5185m		1	1	<1
Magnesium	ppm	ASTM D5185m	450	788	421	23
Calcium	ppm	ASTM D5185m	3000	1371	2149	2472
Phosphorus	ppm	ASTM D5185m	1150	990	1111	915
Zinc	ppm	ASTM D5185m	1350	1291	1407	1070
Sulfur	ppm	ASTM D5185m	4250	3402	3933	3164
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.8	31.5	22.4
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.6	4.7	4.7
Visc @ 100°C	cSt	ASTM D445	10.9	11.9	14.1	13.9


FT-IR (Direct Trend)

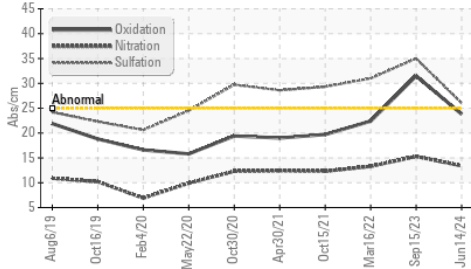


Ferrous Alloys

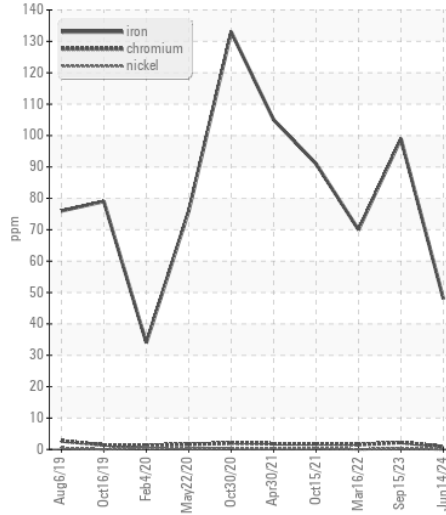


Base Number

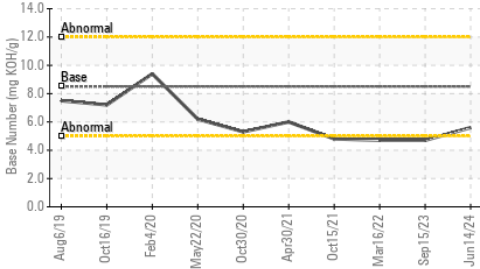


Non-ferrous Metals

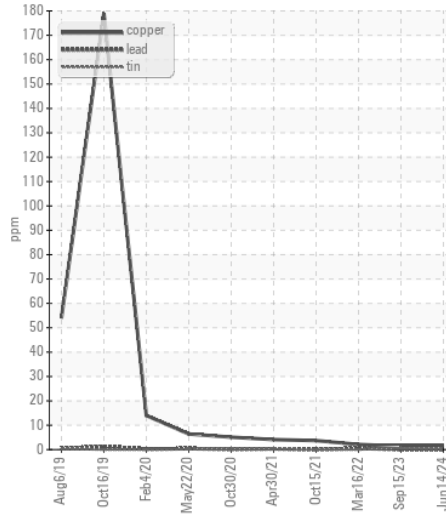


Viscosity @ 100°C

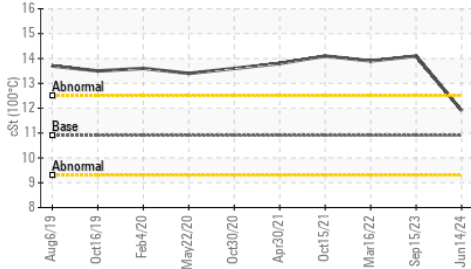

Viscosity @ 100°C

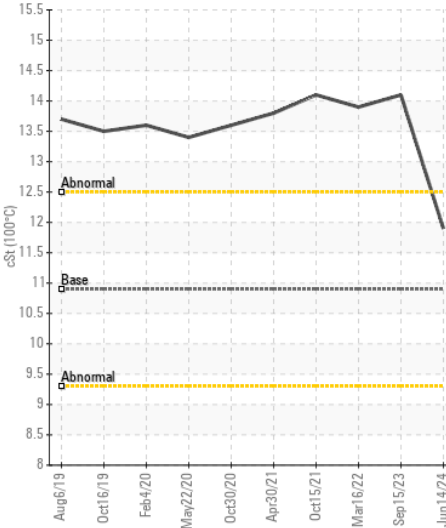

Base Number

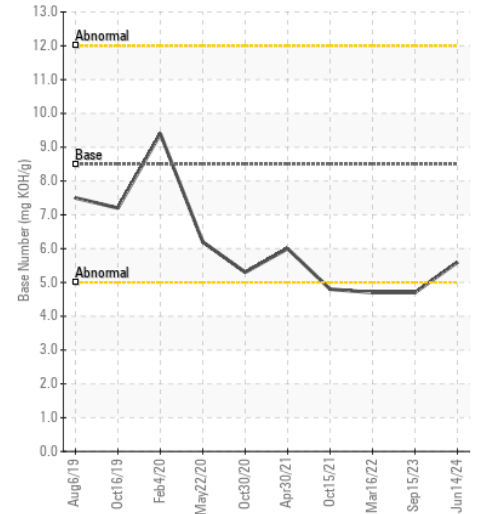

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0827665
Lab Number : 06220497
Unique Number : 11098694
Test Package : FLEET

Received : 25 Jun 2024
Tested : 26 Jun 2024
Diagnosed : 26 Jun 2024 - Wes Davis

CARCO TRANSPORTATION
 415 S WESTERN AVENUE
 OKLAHOMA CITY, OK
 US 73109
 Contact: VICTOR STACHONIAK
 victors@carcotrans.com
 T: (405)239-2555
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)