



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**414049**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0123000</b>	GFL0119395	GFL0119394
Sample Date		Client Info		<b>20 Jun 2024</b>	29 May 2024	02 May 2024
Machine Age	hrs	Client Info		<b>1285</b>	1170	1019
Oil Age	hrs	Client Info		<b>115</b>	151	164
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>25</b>	19	18
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	<1	1
Nickel	ppm	ASTM D5185m	>4	<b>4</b>	3	4
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	2
Aluminum	ppm	ASTM D5185m	>20	<b>14</b>	12	12
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>104</b>	185	235
Tin	ppm	ASTM D5185m	>15	<b>1</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>13</b>	5	11
Potassium	ppm	ASTM D5185m	>20	<b>36</b>	29	27
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.9</b>	9.2	7.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.7</b>	20.5	22.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>216	<b>6</b>	5	4
Boron	ppm	ASTM D5185m	250	<b>7</b>	8	7
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>65</b>	65	64
Manganese	ppm	ASTM D5185m		<b>2</b>	1	<1
Magnesium	ppm	ASTM D5185m	450	<b>960</b>	929	905
Calcium	ppm	ASTM D5185m	3000	<b>1149</b>	1167	1135
Phosphorus	ppm	ASTM D5185m	1150	<b>924</b>	972	1088
Zinc	ppm	ASTM D5185m	1350	<b>1199</b>	1154	1175
Sulfur	ppm	ASTM D5185m	4250	<b>2655</b>	2781	2978
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.2</b>	17.6	20.1
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.3</b>	6.3	9.6
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.4</b>	13.3	13.5

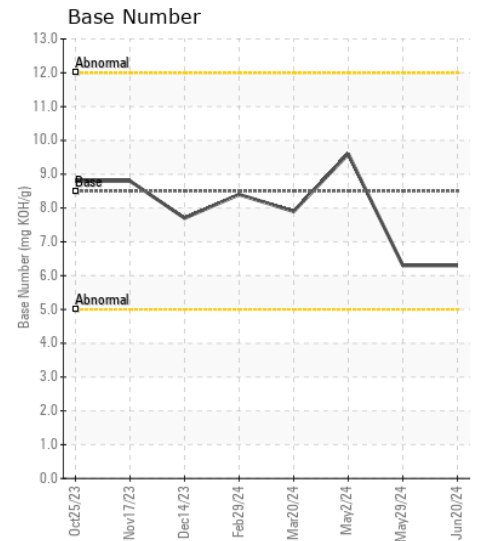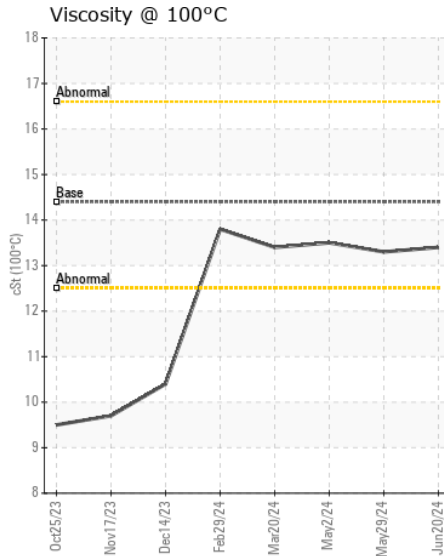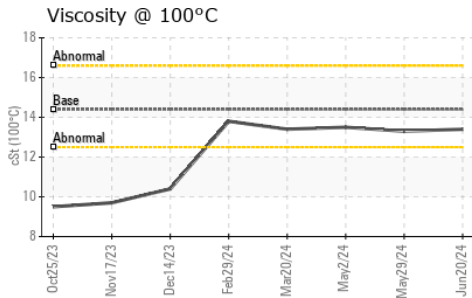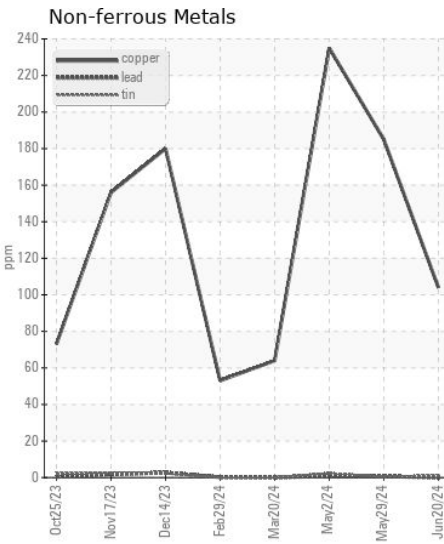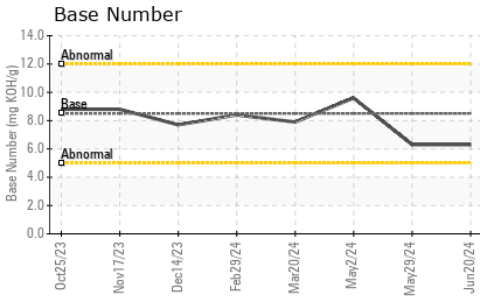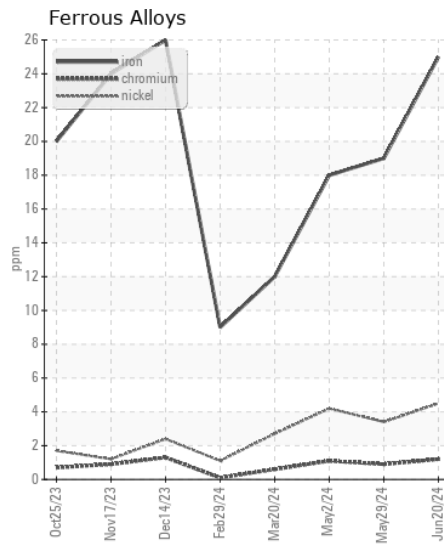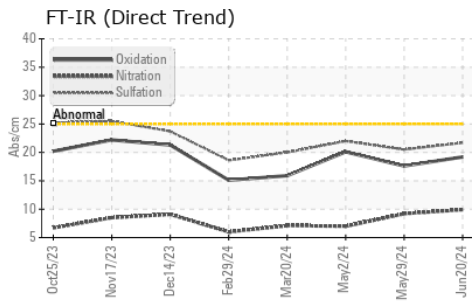

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0123000  
**Lab Number** : 06220507  
**Unique Number** : 11098704  
**Test Package** : FLEET

**Received** : 25 Jun 2024  
**Tested** : 26 Jun 2024  
**Diagnosed** : 26 Jun 2024 - Wes Davis

**GFL Environmental - 814 - Little Rock Hauling**  
 4005 Hwy 161 N.  
 Little Rock, AR  
 US 72117  
 Contact: Brad Koenig  
 bkoenig@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: