



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Stoneway Concrete Renton
 Machine Id
[Stoneway Concrete Renton] 10-545
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PE0003336	---	---
Sample Date		Client Info		30 May 2024	---	---
Machine Age	hrs	Client Info		613	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		613	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	31	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	13	---	---
Lead	ppm	ASTM D5185m	>40	0	---	---
Copper	ppm	ASTM D5185m	>330	12	---	---
Tin	ppm	ASTM D5185m	>15	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	8	---	---
Potassium	ppm	ASTM D5185m	>20	25	---	---
Fuel	%	ASTM D3524	>5	0.5	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	10.4	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		46	---	---
Barium	ppm	ASTM D5185m		<1	---	---
Molybdenum	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		526	---	---
Calcium	ppm	ASTM D5185m		1665	---	---
Phosphorus	ppm	ASTM D5185m		839	---	---
Zinc	ppm	ASTM D5185m		999	---	---
Sulfur	ppm	ASTM D5185m		3707	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.6	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.1	---	---
Visc @ 100°C	cSt	ASTM D445		11.3	---	---

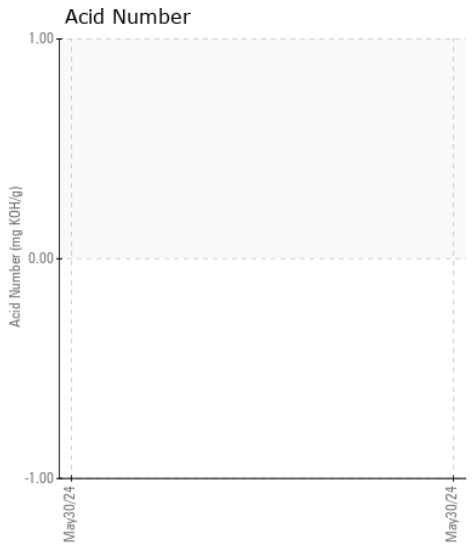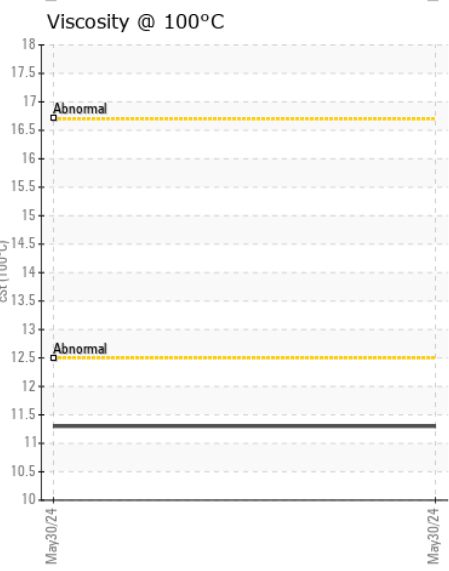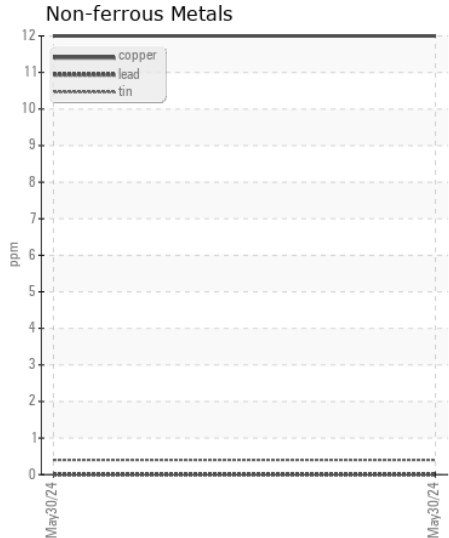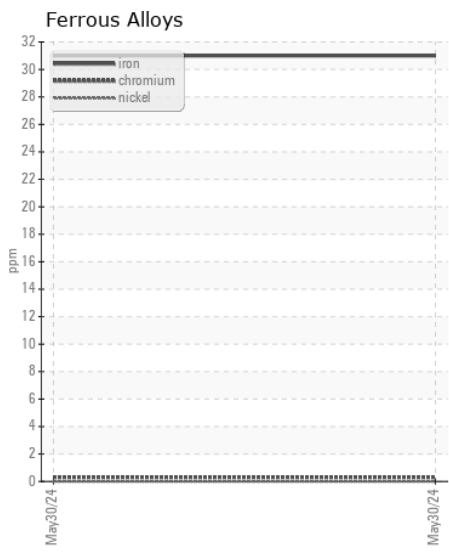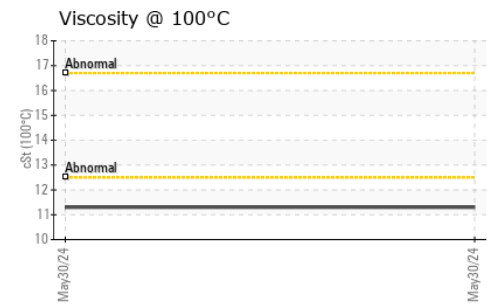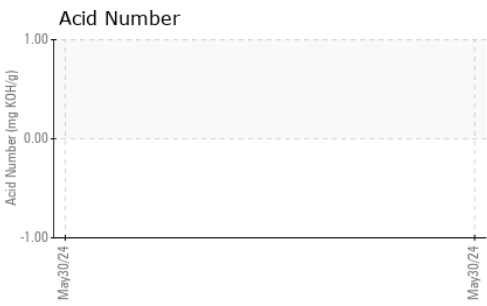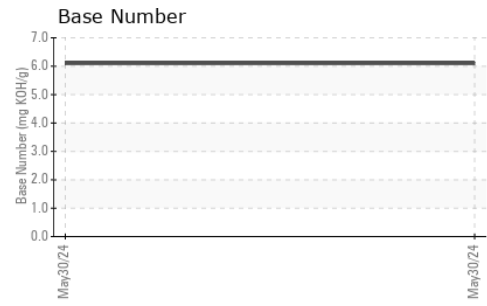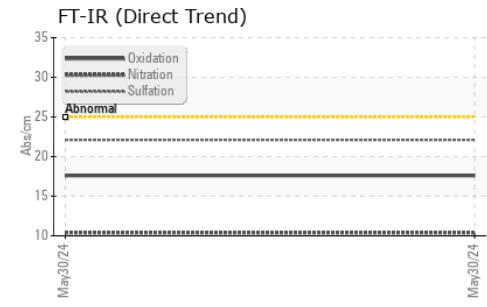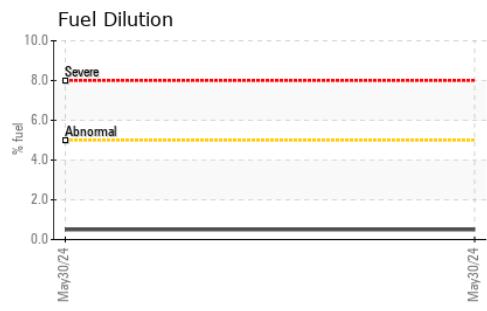

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0003336
Lab Number : 06220563
Unique Number : 11098760
Test Package : CONST (Additional Tests: FT-IR, FuelDilution, ICP, KV100, PercentFuel, SCREEN, TAN Mac, ColdChk
Received : 25 Jun 2024
Tested : 28 Jun 2024
Diagnosed : 28 Jun 2024 - Jonathan Hester
Customer : Gary Merlino Construction - Off Road Shop
 9125 10TH AVE SOUTH
 SEATTLE, WA
 US 98108
 Contact: Jesse Patterson
 jessep@gmccinc.com
 T: (206)255-2601
 F: