



OIL ANALYSIS REPORT

| | |
|-----------------|--------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
Stoneway Concrete Renton
 Machine Id
[Stoneway Concrete Renton] 10-348
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | PE0003338 | --- | --- |
| Sample Date | | Client Info | | 30 May 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 652 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 652 | --- | --- |
| Oil Changed | | Client Info | | Not Chngd | --- | --- |
| Filter Changed | | Client Info | | Not Chngd | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|------|-----|-----|
| Iron | ppm | ASTM D5185m | >100 | 35 | --- | --- |
| Chromium | ppm | ASTM D5185m | >20 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m | >4 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | >3 | <1 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >20 | 10 | --- | --- |
| Lead | ppm | ASTM D5185m | >40 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m | >330 | 18 | --- | --- |
| Tin | ppm | ASTM D5185m | >15 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION









There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|-------|-----|-----|
| Silicon | ppm | ASTM D5185m | >25 | 9 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 23 | --- | --- |
| Fuel | | WC Method | >5 | <1.0 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | *ASTM D7844 | >3 | 0.2 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 10.0 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 22.1 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- | --- |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|------|------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 2 | --- | --- |
| Boron | ppm | ASTM D5185m | 250 | 34 | --- | --- |
| Barium | ppm | ASTM D5185m | 10 | <1 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 100 | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | | 2 | --- | --- |
| Magnesium | ppm | ASTM D5185m | 450 | 518 | --- | --- |
| Calcium | ppm | ASTM D5185m | 3000 | 1656 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 1150 | 806 | --- | --- |
| Zinc | ppm | ASTM D5185m | 1350 | 970 | --- | --- |
| Sulfur | ppm | ASTM D5185m | 4250 | 3713 | --- | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 17.6 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 8.5 | 5.5 | --- | --- |
| Visc @ 100°C | cSt | ASTM D445 | 10.9 | 11.3 | --- | --- |

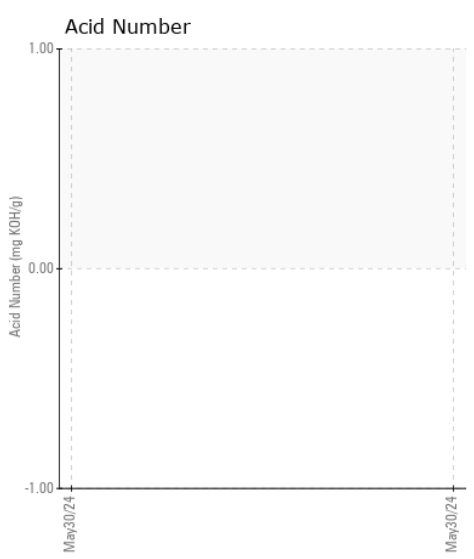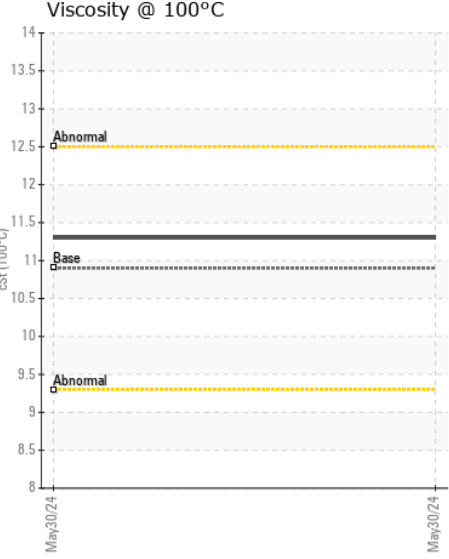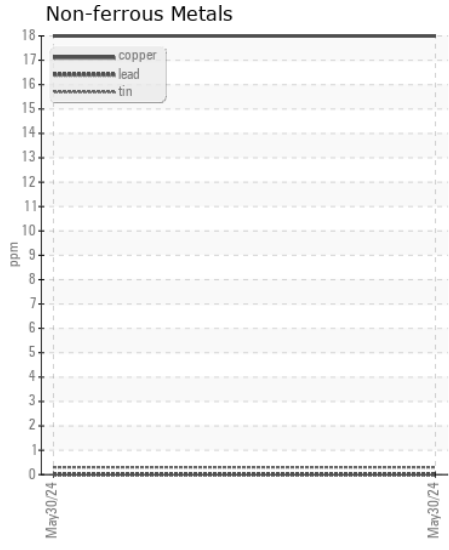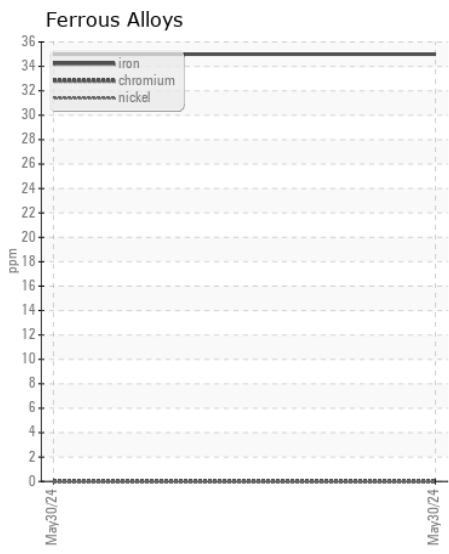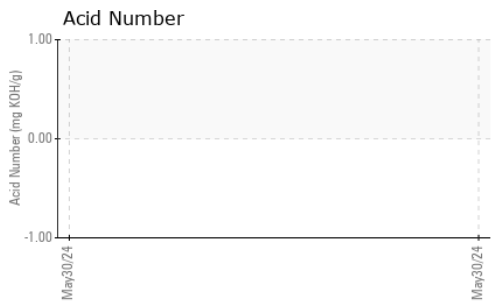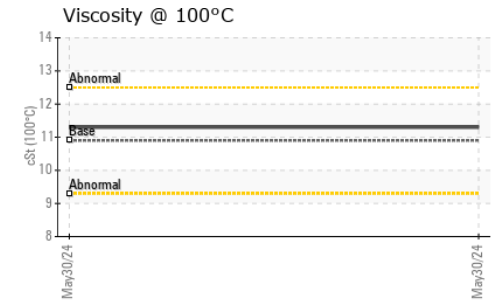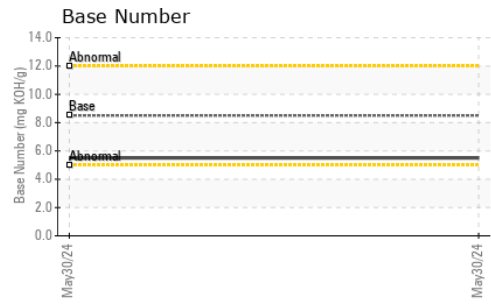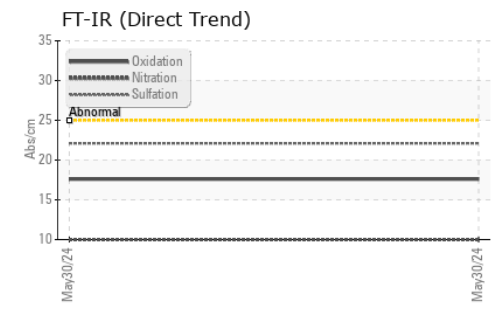

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PE0003338 **Received** : 25 Jun 2024
Lab Number : 06220564 **Tested** : 27 Jun 2024
Unique Number : 11098761 **Diagnosed** : 27 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: FT-IR, ICP, KV100, SCREEN, TAN Man, TBN)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Gary Merlino Construction - Off Road Shop
 9125 10TH AVE SOUTH
 SEATTLE, WA
 US 98108
 Contact: Jesse Patterson
 oilsamples@gmccinc.com
 T: 1(866)292-1303
 F: