



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KIOTI XW5000264
Component
Diesel Engine
Fluid
{not provided} (--- GAL)

RECOMMENDATION

We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KT0001395	---	---
Sample Date		Client Info		18 Jun 2024	---	---
Machine Age	hrs	Client Info		7	---	---
Oil Age	hrs	Client Info		7	---	---
Filter Age	hrs	Client Info		7	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ABNORMAL	---	---

WEAR

Bearing and/or bushing wear is indicated. Metal levels appear high for a new component breaking in.

Iron	ppm	ASTM D5185m	>100	10	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>40	▲ 35	---	---
Copper	ppm	ASTM D5185m	>330	▲ 368	---	---
Tin	ppm	ASTM D5185m	>15	▲ 26	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION


Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	18	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel	%	ASTM D3524	>5	1.2	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	4.6	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	14.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		10	---	---
Barium	ppm	ASTM D5185m		10	---	---
Molybdenum	ppm	ASTM D5185m		53	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		915	---	---
Calcium	ppm	ASTM D5185m		1140	---	---
Phosphorus	ppm	ASTM D5185m		1014	---	---
Zinc	ppm	ASTM D5185m		1240	---	---
Sulfur	ppm	ASTM D5185m		3718	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	9.3	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.9	---	---
Visc @ 100°C	cSt	ASTM D445		10.5	---	---

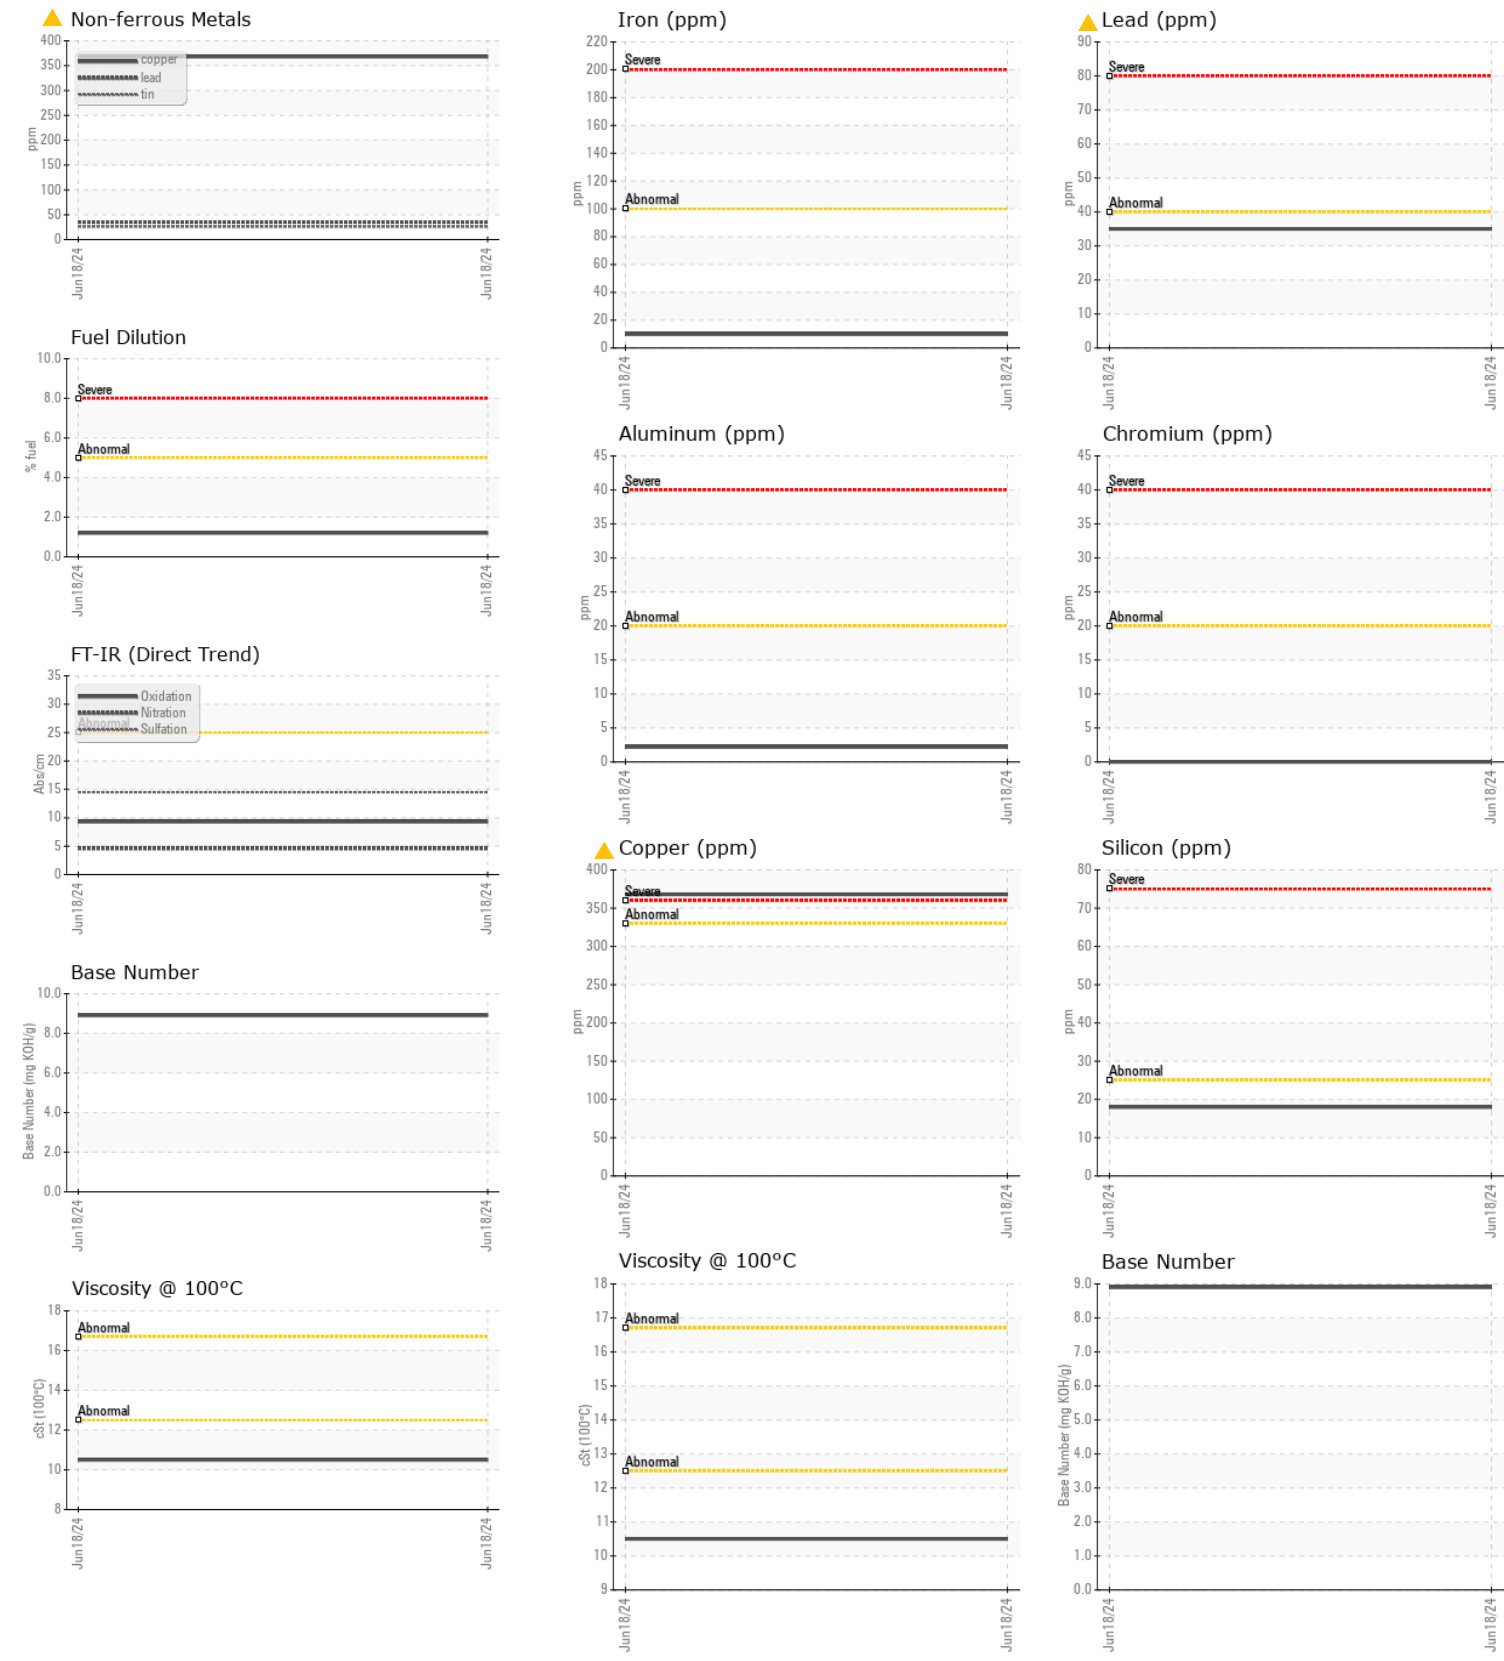

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KT0001395
Lab Number : 06220585
Unique Number : 11098782
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

Received : 25 Jun 2024
Tested : 28 Jun 2024
Diagnosed : 28 Jun 2024 - Doug Bogart

HORNS OUTDOOR
 3034 ALBERT PIKE RD
 HOT SPRINGS, AR
 US 71913
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (501)767-9000

F: