



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
Blythe & Zachary JV CSA - I85 SC
Machine Id
VOLVO ECR88D 3005793 (S/N ECR88D215467)
Component
Diesel Engine
Fluid
VOLVO VDS-4.5 Premium Motor Oil 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0003131	VCP426930	VCP339473
Sample Date		Client Info		24 Jun 2024	05 Sep 2023	14 Jun 2022
Machine Age	hrs	Client Info		2964	2475	0
Oil Age	hrs	Client Info		489	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	12	15	18
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	4	4	4
Lead	ppm	ASTM D5185m	>20	0	0	<1
Copper	ppm	ASTM D5185m	>15	1	2	4
Tin	ppm	ASTM D5185m	>10	0	<1	1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	6	6	8
Potassium	ppm	ASTM D5185m	>20	2	0	0
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	9.8	9.8	10.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.3	23.1	24.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		4	5	5
Boron	ppm	ASTM D5185m		35	32	41
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		42	48	40
Manganese	ppm	ASTM D5185m		1	<1	<1
Magnesium	ppm	ASTM D5185m		559	558	503
Calcium	ppm	ASTM D5185m		1801	1993	1856
Phosphorus	ppm	ASTM D5185m		977	1021	916
Zinc	ppm	ASTM D5185m		1206	1222	1158
Sulfur	ppm	ASTM D5185m		3321	3387	2682
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.4	22.4	24.2
Base Number (BN)	mg KOH/g	ASTM D2896		9.4	9.1	10.0
Visc @ 100°C	cSt	ASTM D445		13.3	13.8	14.1


FT-IR (Direct Trend)

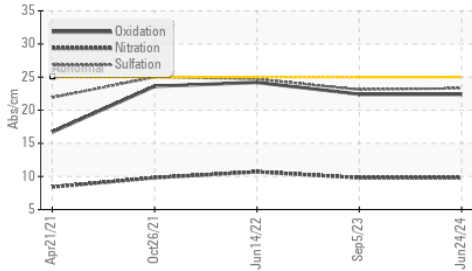


Ferrous Alloys

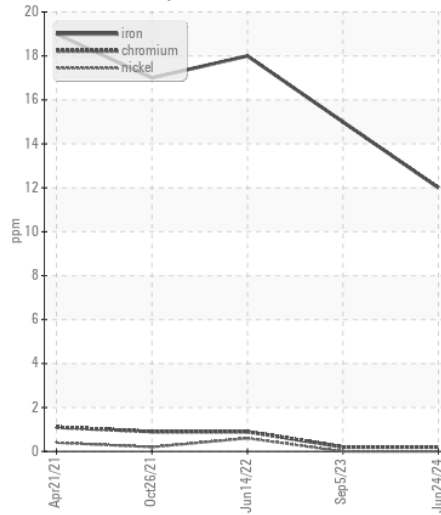


Base Number

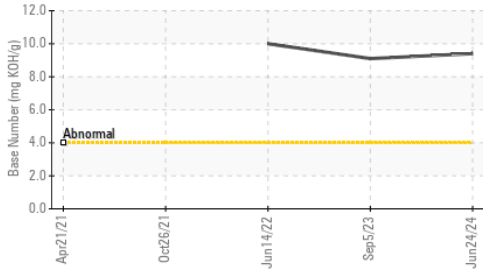


Viscosity @ 100°C

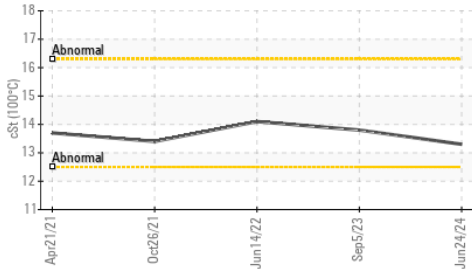


Non-ferrous Metals

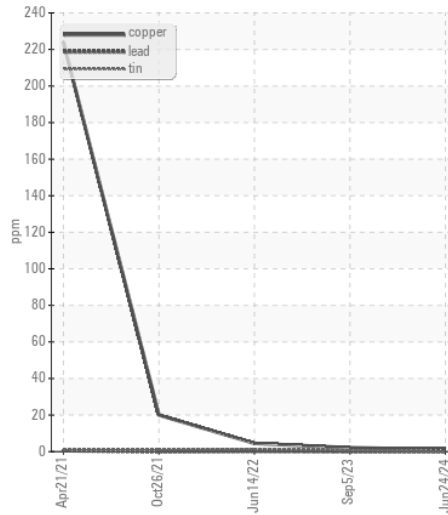

Viscosity @ 100°C

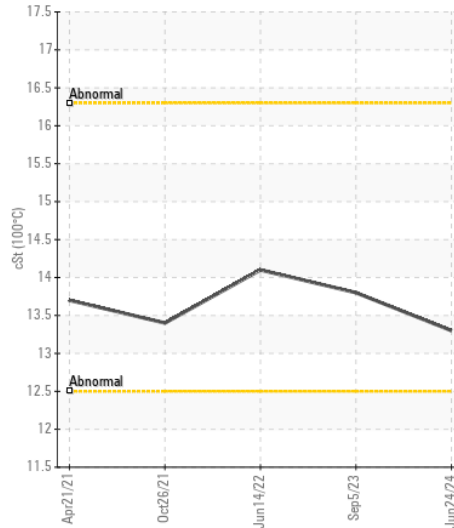

Base Number

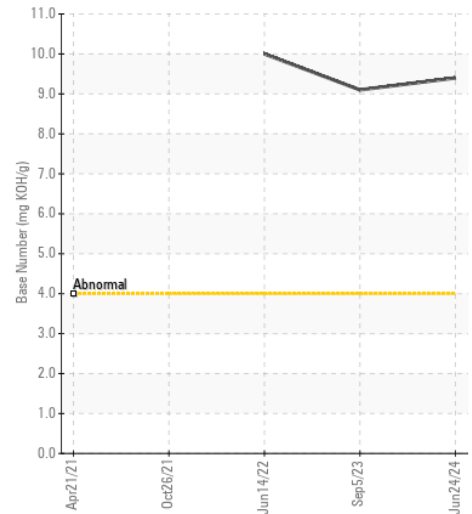

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0003131 **Received** : 26 Jun 2024
Lab Number : 06220647 **Tested** : 27 Jun 2024
Unique Number : 11098844 **Diagnosed** : 27 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: TBN)

BLYTHE CONSTRUCTION INC
 2911 N GRAHAM STREET
 CHARLOTTE, NC
 US 28231
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (704)373-2960