



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**2026863**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (--- QTS)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PCA0124280</b>	PCA0106364	PCA0099506
Sample Date		Client Info		<b>10 Jun 2024</b>	10 Dec 2023	29 May 2023
Machine Age	mls	Client Info		<b>304597</b>	265284	0
Oil Age	mls	Client Info		<b>20000</b>	20000	0
Filter Age	mls	Client Info		<b>20000</b>	20000	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	N/A
Filter Changed		Client Info		<b>Changed</b>	Not Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>18</b>	17	22
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>14</b>	<1	3
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	<1
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>6</b>	5	9
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	3	6
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	2	4
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.0</b>	8.8	9.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	19.2	20.2
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	2
Boron	ppm	ASTM D5185m	2	<b>9</b>	2	2
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>48</b>	56	57
Manganese	ppm	ASTM D5185m	0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>825</b>	916	957
Calcium	ppm	ASTM D5185m	1050	<b>1240</b>	1080	1112
Phosphorus	ppm	ASTM D5185m	995	<b>997</b>	1062	1036
Zinc	ppm	ASTM D5185m	1180	<b>1289</b>	1275	1280
Sulfur	ppm	ASTM D5185m	2600	<b>3121</b>	3027	3568
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.2</b>	15.5	15.9
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.2</b>	7.4	7.2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.8</b>	11.0	10.8

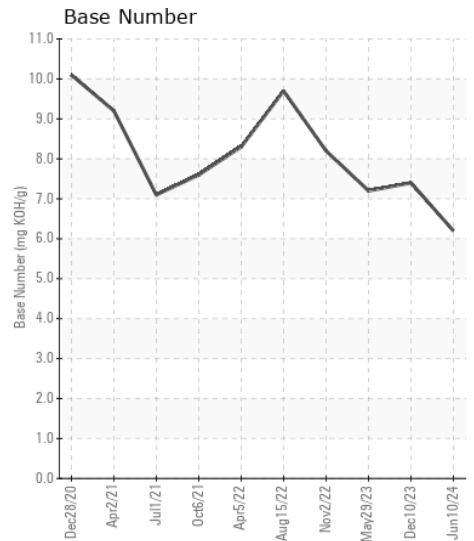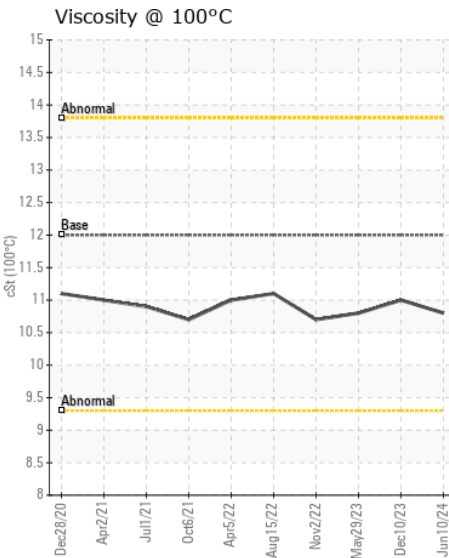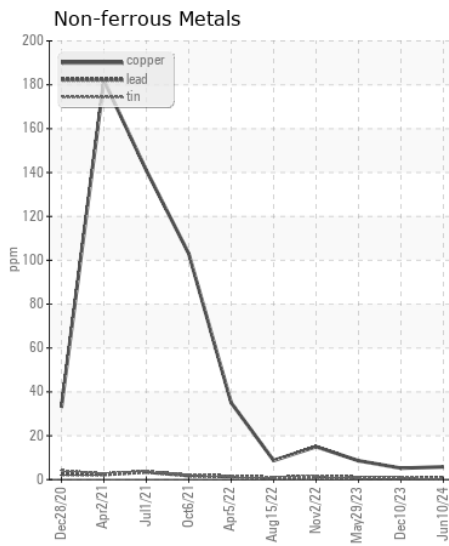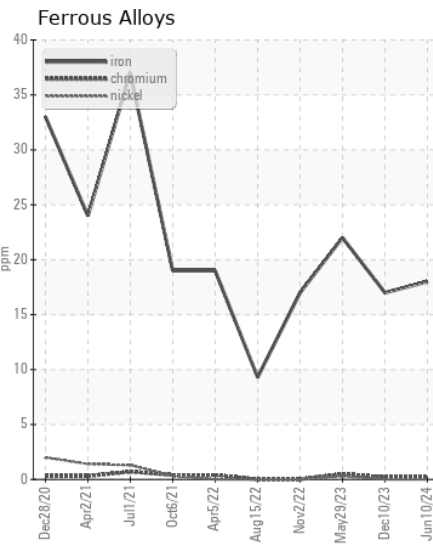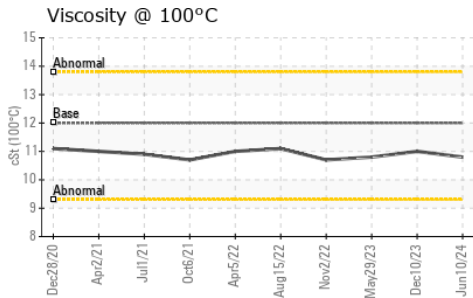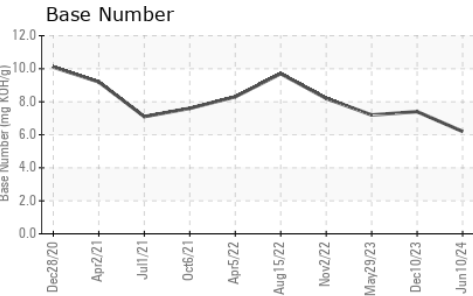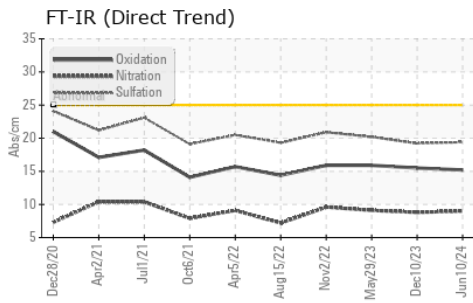

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0124280  
**Lab Number** : 06220727  
**Unique Number** : 11098924  
**Test Package** : FLEET  
**Received** : 26 Jun 2024  
**Tested** : 27 Jun 2024  
**Diagnosed** : 27 Jun 2024 - Wes Davis

**PERDUE FARMS - SALISBURY**  
 7036 ZION CHURCH ROAD  
 SALISBURY, MD  
 US 21802  
 Contact: RICHARD O'NEAL  
 richard.oneal@perdue.com  
 T: (410)543-3628  
 F: (410)341-2164

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)