



# OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 4 - Fairmont [RO# 152355]**  
Machine Id  
**JOHN DEERE 350G 1FF350GXAKF814122**  
Component  
**Diesel Engine**  
Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (7 GAL)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0050935</b>	LEC0047848	LEC0041048
Sample Date		Client Info		<b>21 Jun 2024</b>	23 Feb 2024	29 Jun 2023
Machine Age	hrs	Client Info		<b>2624</b>	2136	1519
Oil Age	hrs	Client Info		<b>488</b>	617	590
Filter Age	hrs	Client Info		<b>488</b>	617	590
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR

Cylinder, crank, or cam shaft wear is indicated. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>▲ 53</b>	▲ 85	▲ 60
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	2	4
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	3	6
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	2
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	2
Aluminum	ppm	ASTM D5185m	>31	<b>8</b>	14	18
Lead	ppm	ASTM D5185m	>26	<b>0</b>	<1	6
Copper	ppm	ASTM D5185m	>26	<b>6</b>	23	▲ 85
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	3
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	<b>8</b>	9	9
Potassium	ppm	ASTM D5185m	>20	<b>13</b>	38	58
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.5	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.6</b>	8.9	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.8</b>	22.7	23.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>6</b>	6	5
Boron	ppm	ASTM D5185m		<b>177</b>	142	129
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>261</b>	252	227
Manganese	ppm	ASTM D5185m		<b>0</b>	2	3
Magnesium	ppm	ASTM D5185m		<b>834</b>	799	831
Calcium	ppm	ASTM D5185m		<b>1509</b>	1401	1517
Phosphorus	ppm	ASTM D5185m		<b>880</b>	821	785
Zinc	ppm	ASTM D5185m		<b>1161</b>	1055	1024
Sulfur	ppm	ASTM D5185m		<b>2992</b>	2769	3109
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.2</b>	16.9	17.9
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>8.4</b>	8.0	8.6
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.2</b>	13.2	13.0

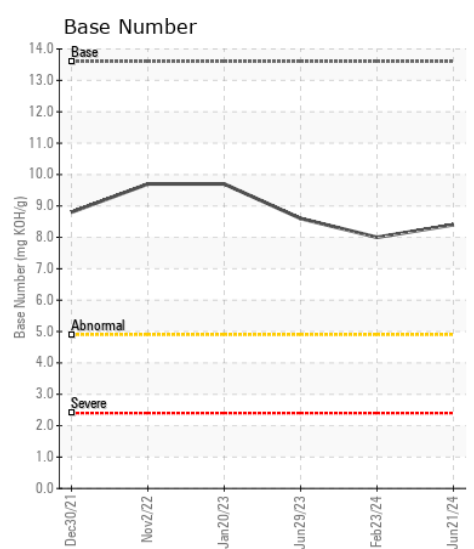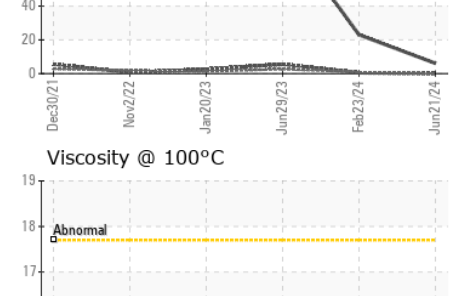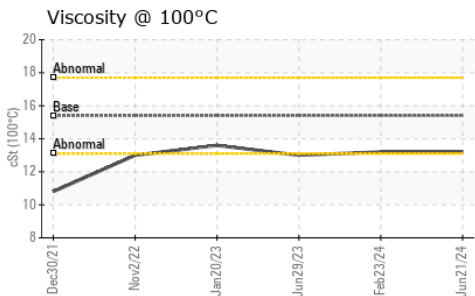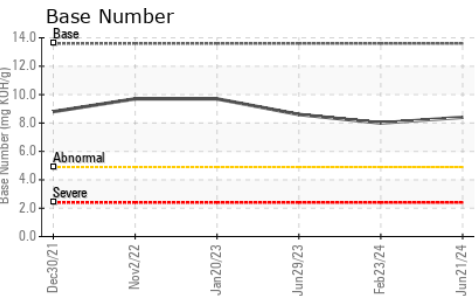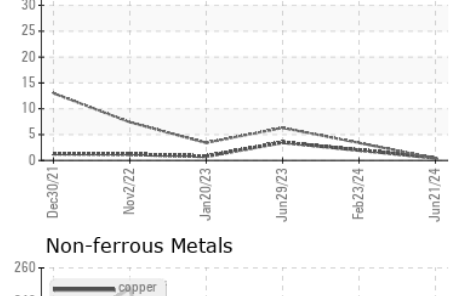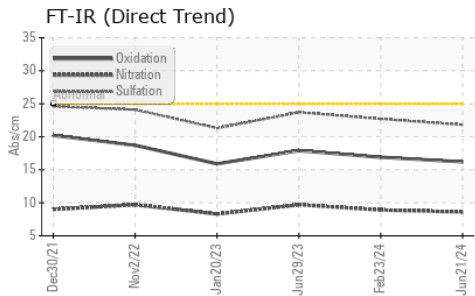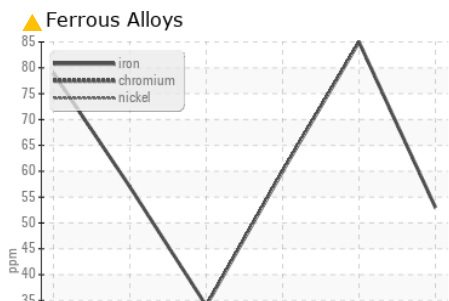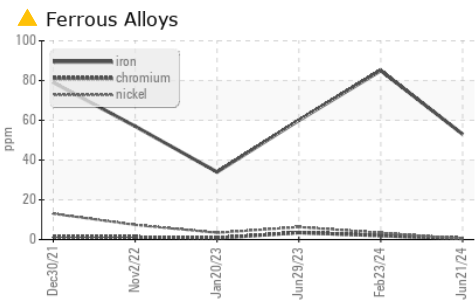

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0050935 **Received** : 26 Jun 2024  
**Lab Number** : 06220738 **Tested** : 26 Jun 2024  
**Unique Number** : 11098935 **Diagnosed** : 27 Jun 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: TBN )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com  
 T:  
 F: (740)373-5570

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)