



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[ATLAS ORGANICS]**

Machine Id  
**VOLVO L70H 624676**

Component  
**Diesel Engine**

Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP437545</b>	VCP437835	VCP440766
Sample Date		Client Info		<b>21 Jun 2024</b>	15 Mar 2024	29 Nov 2023
Machine Age	hrs	Client Info		<b>3462</b>	3027	0
Oil Age	hrs	Client Info		<b>0</b>	500	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>88</b>	94	112
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	2	2
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	1
Tin	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>5</b>	6	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	1	0
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.7</b>	7.7	7.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.9</b>	21.3	21.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>2</b>	2	<1
Boron	ppm	ASTM D5185m	2.5	<b>22</b>	28	21
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0.7	<b>42</b>	45	44
Manganese	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	2	2
Magnesium	ppm	ASTM D5185m	256	<b>555</b>	606	493
Calcium	ppm	ASTM D5185m	2057	<b>1545</b>	1866	1761
Phosphorus	ppm	ASTM D5185m	935	<b>875</b>	1031	970
Zinc	ppm	ASTM D5185m	1223	<b>1143</b>	1275	1138
Sulfur	ppm	ASTM D5185m	4079	<b>2834</b>	3849	3411
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.4</b>	19.5	19.3
Base Number (BN)	mg KOH/g	ASTM D2896	10	<b>9.6</b>	10.0	10.3
Visc @ 100°C	cSt	ASTM D445	15.0	<b>12.8</b>	13.3	13.1

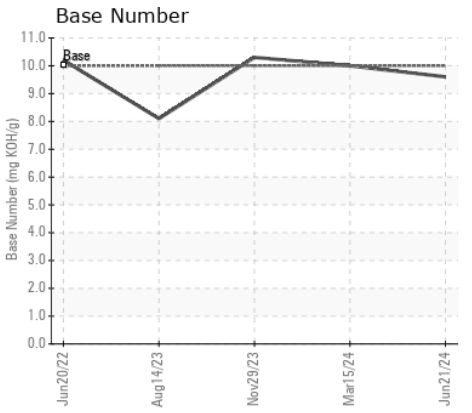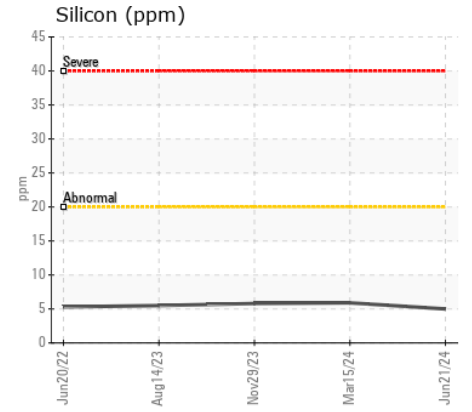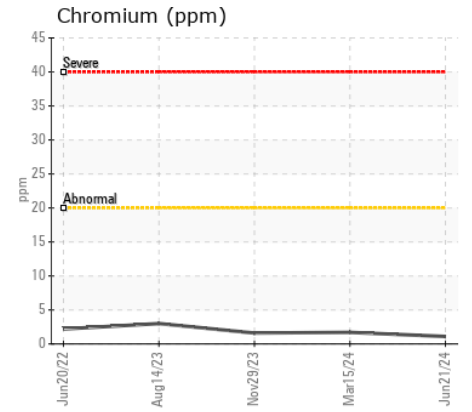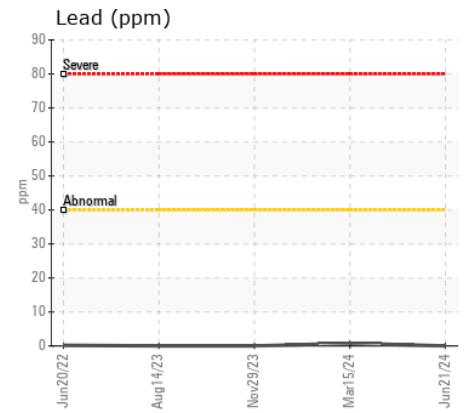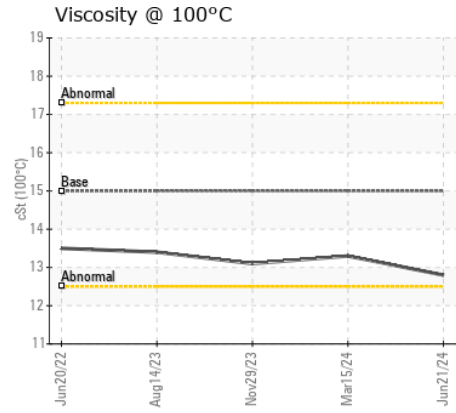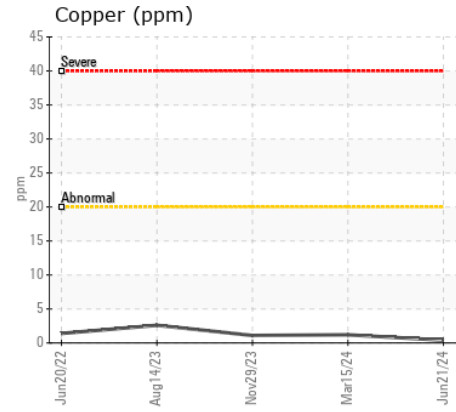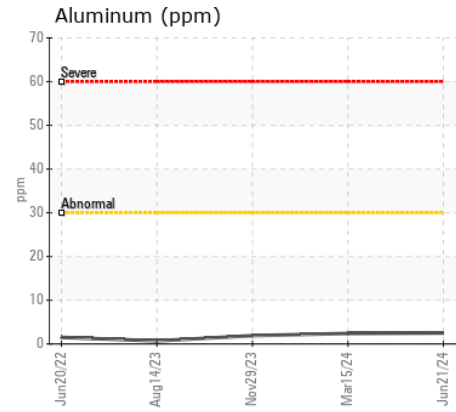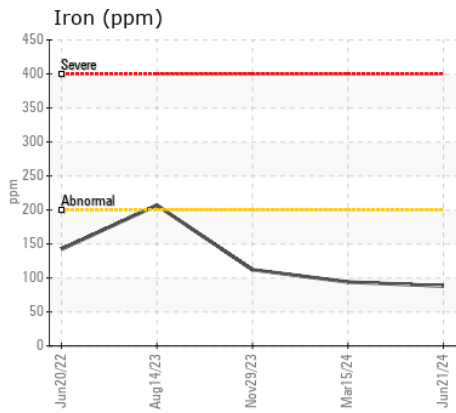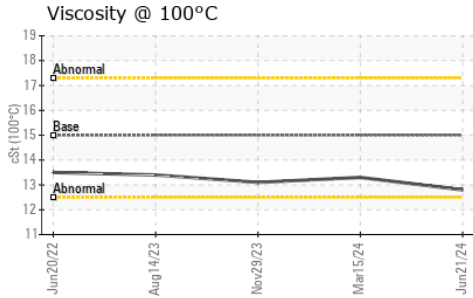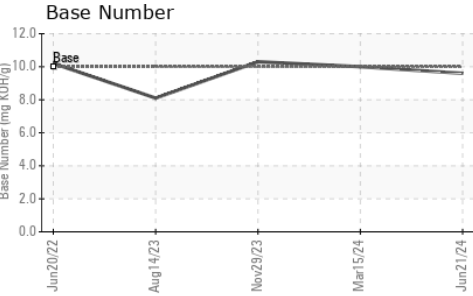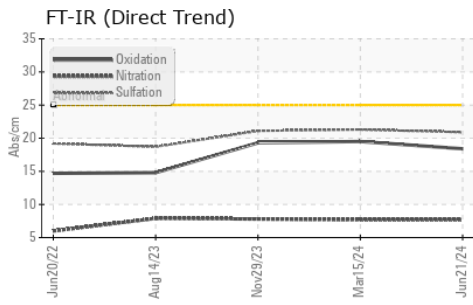

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP437545 **Received** : 26 Jun 2024  
**Lab Number** : 06220757 **Tested** : 27 Jun 2024  
**Unique Number** : 11098954 **Diagnosed** : 27 Jun 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC**  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619  
 Contact: KENNY HANEY  
 khaney@flaglerce.com  
 T: (813)630-0077  
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)