



PacLease

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
781248
 Component
Diesel Engine
 Fluid
{not provided} (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL06220791	RPL06124495	RPL05968664
Sample Date		Client Info		14 Jun 2024	14 Mar 2024	23 Sep 2023
Machine Age	mls	Client Info		293224	253133	172116
Oil Age	mls	Client Info		60000	83133	38573
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	47	59	22
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		11	<1	0
Silver	ppm	ASTM D5185m	>3	0	<1	<1
Aluminum	ppm	ASTM D5185m	>20	8	11	11
Lead	ppm	ASTM D5185m	>40	0	<1	<1
Copper	ppm	ASTM D5185m	>330	4	8	3
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	16	27	15
Potassium	ppm	ASTM D5185m	>20	11	11	8
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.8	0.4
Nitration	Abs/cm	*ASTM D7624	>20	12.7	15.1	11.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.7	32.2	25.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	<1	2
Boron	ppm	ASTM D5185m		15	24	45
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		75	147	135
Manganese	ppm	ASTM D5185m		0	1	1
Magnesium	ppm	ASTM D5185m		808	724	763
Calcium	ppm	ASTM D5185m		1722	1694	1781
Phosphorus	ppm	ASTM D5185m		790	760	768
Zinc	ppm	ASTM D5185m		1051	935	1001
Sulfur	ppm	ASTM D5185m		3152	2678	2850
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.9	33.7	23.9
Base Number (BN)	mg KOH/g	ASTM D2896		4.9	3.4	5.4
Visc @ 100°C	cSt	ASTM D445		14.7	15.0	14.4

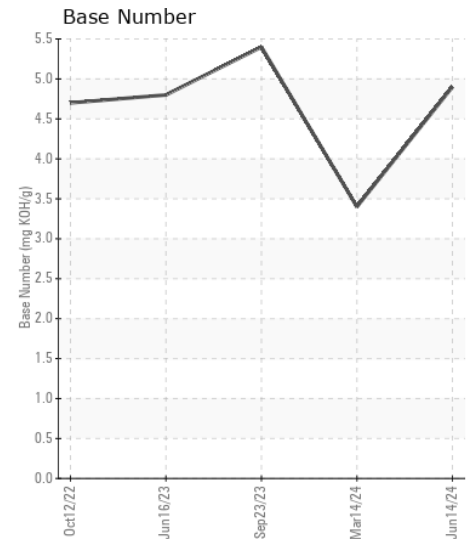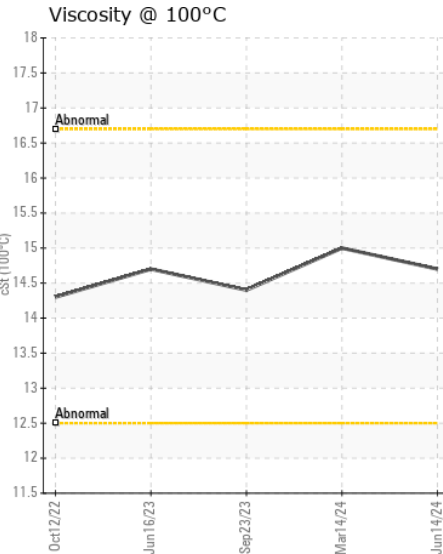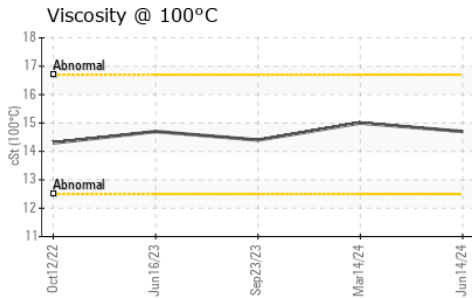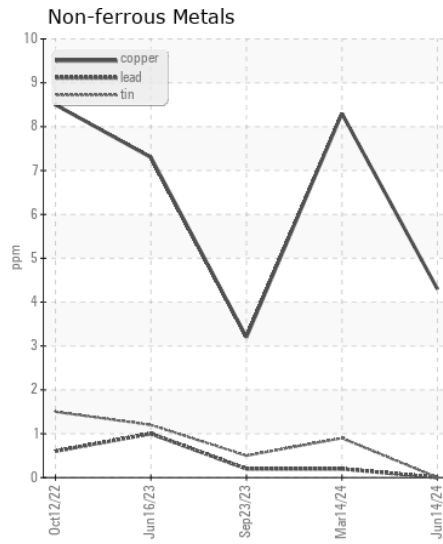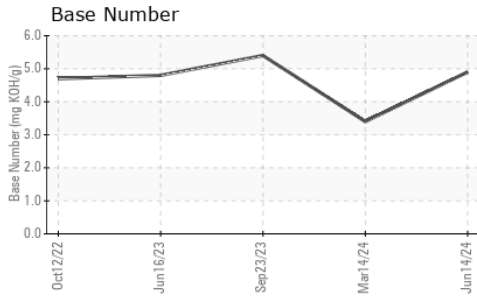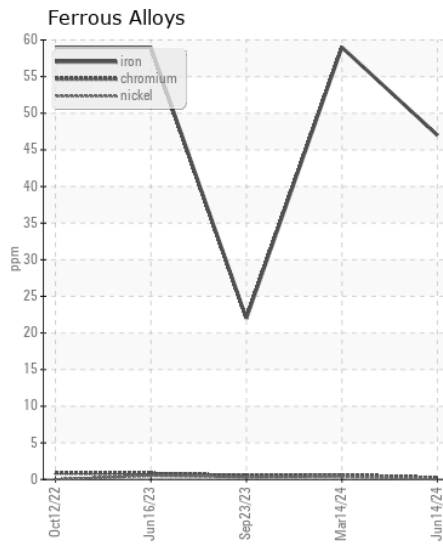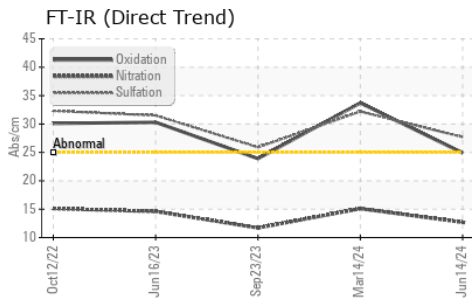

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL06220791
Lab Number : 06220791
Unique Number : 11098988
Test Package : FLEET

Received : 26 Jun 2024
Tested : 26 Jun 2024
Diagnosed : 26 Jun 2024 - Wes Davis

RTL PACLEASE - 7050 -Leasing Tyler
 10791 Hwy 69 North
 Tyler, TX
 US 75706

Contact: Justin Cooper
 CooperJ1@RushEnterprises.Com

T: (903)405-3000

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: