



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 410E 1DW410EBHNF716068

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (13 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0220062	JR0215600	JR0192734
Sample Date		Client Info		24 Jun 2024	28 May 2024	16 Nov 2023
Machine Age	hrs	Client Info		2511	4751682	4751682
Oil Age	hrs	Client Info		2511	4751682	4750666
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	5	24	15
Chromium	ppm	ASTM D5185m	>11	0	0	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>31	4	6	4
Lead	ppm	ASTM D5185m	>26	1	8	6
Copper	ppm	ASTM D5185m	>26	11	26	▲ 50
Tin	ppm	ASTM D5185m	>4	2	5	4
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	6	6	7
Potassium	ppm	ASTM D5185m	>20	2	7	0
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.2	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	7.1	9.6	9.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	23.6	23.2
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	3	10	5
Boron	ppm	ASTM D5185m		232	104	158
Barium	ppm	ASTM D5185m		<1	<1	0
Molybdenum	ppm	ASTM D5185m		242	239	244
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m		815	810	799
Calcium	ppm	ASTM D5185m		1400	1363	1393
Phosphorus	ppm	ASTM D5185m		920	880	854
Zinc	ppm	ASTM D5185m		1066	1033	1040
Sulfur	ppm	ASTM D5185m		3479	3299	2818
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	18.0	17.3
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	9.2	8.3	8.3
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	12.8	12.8


FT-IR (Direct Trend)

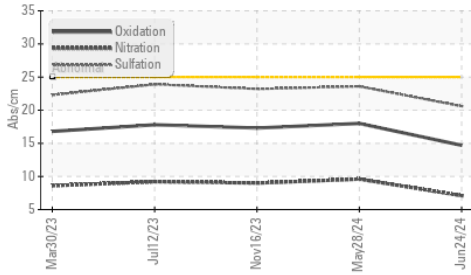


Ferrous Alloys

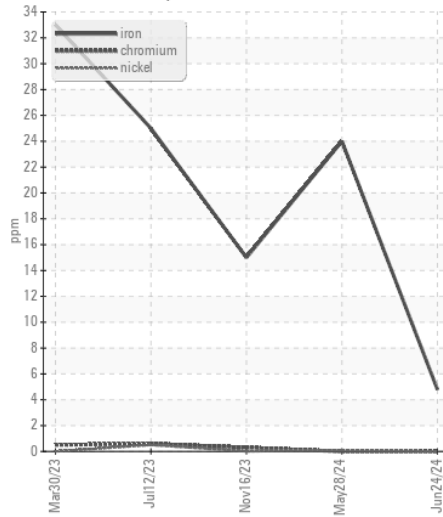


Base Number

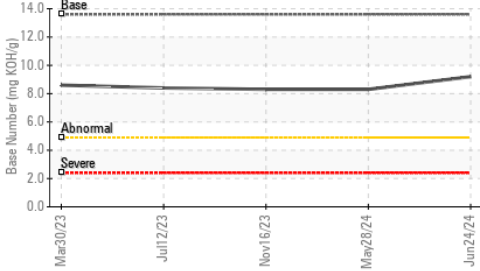


Non-ferrous Metals

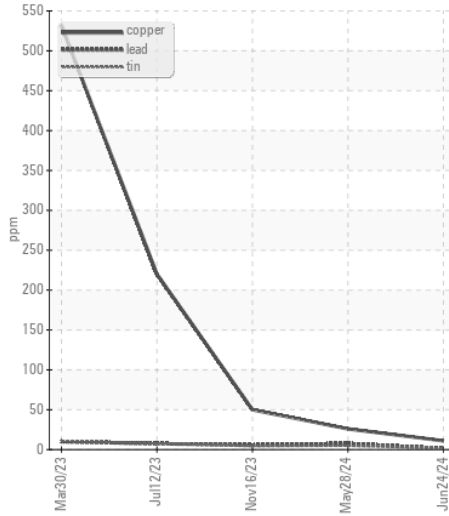


Viscosity @ 100°C

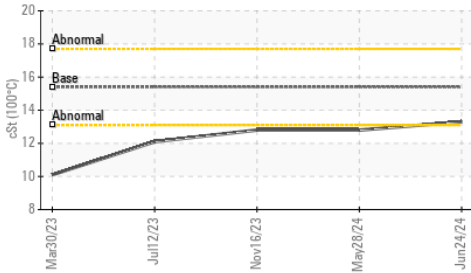

Viscosity @ 100°C

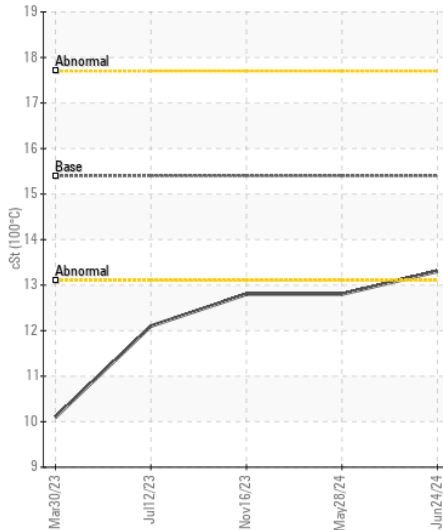

Base Number

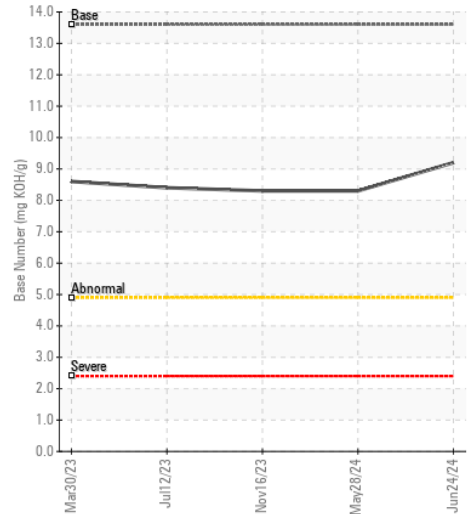

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : JR0220062 Received : 26 Jun 2024
 Lab Number : 06220825 Tested : 27 Jun 2024
 Unique Number : 11099022 Diagnosed : 27 Jun 2024 - Wes Davis
 Test Package : CONST (Additional Tests: TBN)

JRE - CHARLOTTE
 9550 STATESVILLE ROAD
 CHARLOTTE, NC
 US 28269

Contact: CHARLOTTE SHOP
 myoung@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (704)597-0211
 F: (704)596-6198