



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
1731
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0948952	WC0792869	WC0772986
Sample Date		Client Info		12 Jun 2024	09 Mar 2023	30 Jan 2023
Machine Age	mls	Client Info		84197	54270	50989
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				ATTENTION	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	81	30	17
Chromium	ppm	ASTM D5185m	>20	5	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	5	11	12
Lead	ppm	ASTM D5185m	>40	2	0	0
Copper	ppm	ASTM D5185m	>330	85	2	1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	19	6	5
Potassium	ppm	ASTM D5185m	>20	4	21	16
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.7	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	11.2	10.4	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	20.5	20.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m	>158	4	2	3
Boron	ppm	ASTM D5185m	250	42	25	35
Barium	ppm	ASTM D5185m	10	2	0	0
Molybdenum	ppm	ASTM D5185m	100	70	78	74
Manganese	ppm	ASTM D5185m		3	<1	<1
Magnesium	ppm	ASTM D5185m	450	239	50	51
Calcium	ppm	ASTM D5185m	3000	1469	2165	2068
Phosphorus	ppm	ASTM D5185m	1150	741	941	949
Zinc	ppm	ASTM D5185m	1350	862	1135	1120
Sulfur	ppm	ASTM D5185m	4250	2762	3452	4063
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.4	17.3	15.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.5	4.9	6.4
Visc @ 100°C	cSt	ASTM D445	14.4	19.9	13.0	13.4

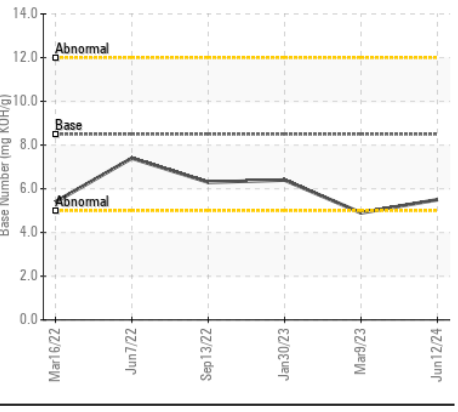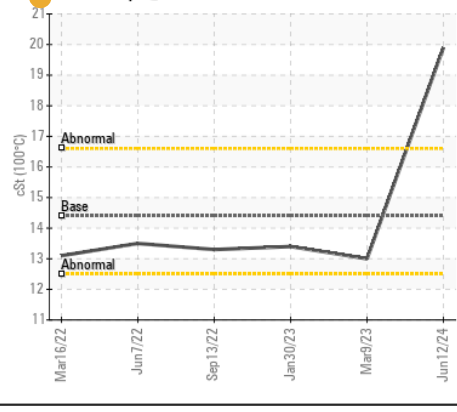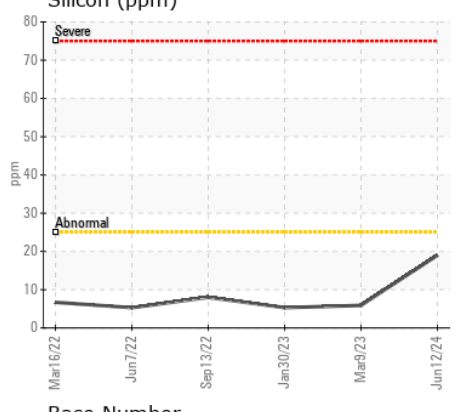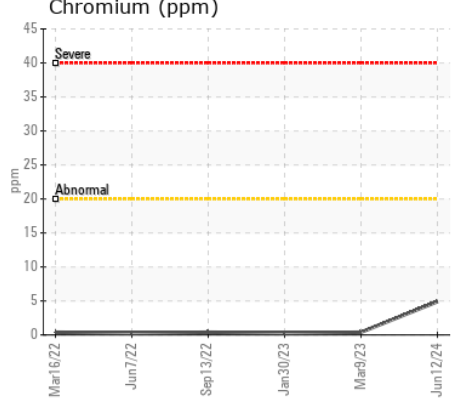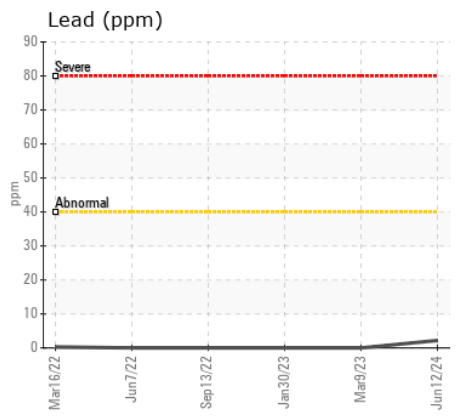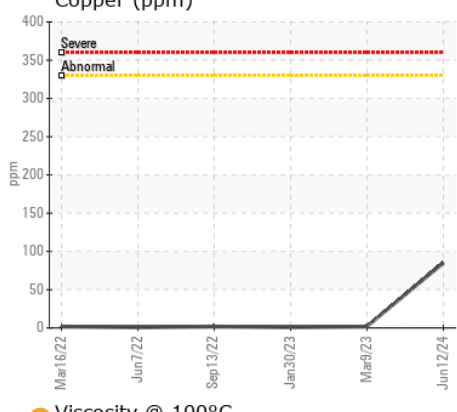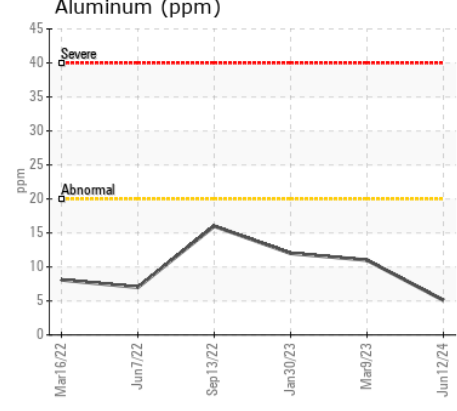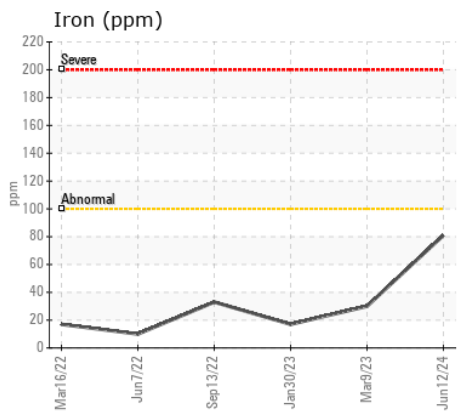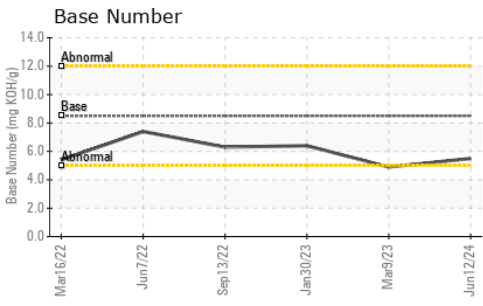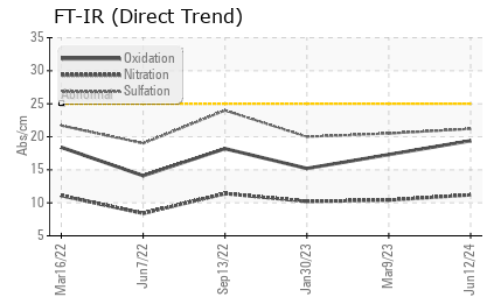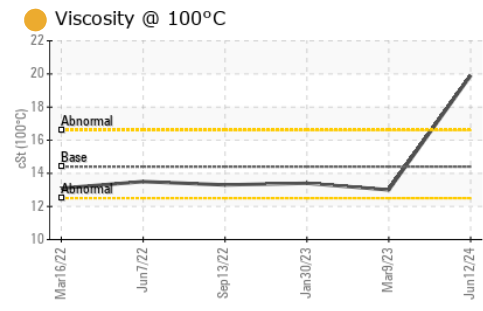

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0948952 **Received** : 26 Jun 2024
Lab Number : 06220871 **Tested** : 27 Jun 2024
Unique Number : 11099068 **Diagnosed** : 27 Jun 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

WAKE COUNTY PUBLIC SCHOOL SYSTEM
 1551 ROCK QUARRY ROAD
 RALEIGH, NC
 US 27610
 Contact: DEVIN WEBER
 dweber@wcpss.net
 T: (919)856-8076
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)