



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**INTERNATIONAL 1319**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0906104</b>	WC0729880	WC0697102
Sample Date		Client Info		<b>15 Mar 2024</b>	17 Aug 2022	02 May 2022
Machine Age	mls	Client Info		<b>244200</b>	219173	215016
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>6</b>	30	14
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	1	<1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	3	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	4	1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	6	3
Tin	ppm	ASTM D5185m	>15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	12	9
Potassium	ppm	ASTM D5185m	>20	<b>9</b>	0	0
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.2</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	12.4	10.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>16.8</b>	24.6	19.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>2</b>	3	1
Boron	ppm	ASTM D5185m	250	<b>62</b>	21	52
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>82</b>	87	85
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>58</b>	14	12
Calcium	ppm	ASTM D5185m	3000	<b>2106</b>	2267	2187
Phosphorus	ppm	ASTM D5185m	1150	<b>1055</b>	961	1011
Zinc	ppm	ASTM D5185m	1350	<b>1197</b>	1162	1219
Sulfur	ppm	ASTM D5185m	4250	<b>4272</b>	3679	3856
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>12.5</b>	19.6	15.8
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.9</b>	5.7	6.5
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.8</b>	14.2	14.0

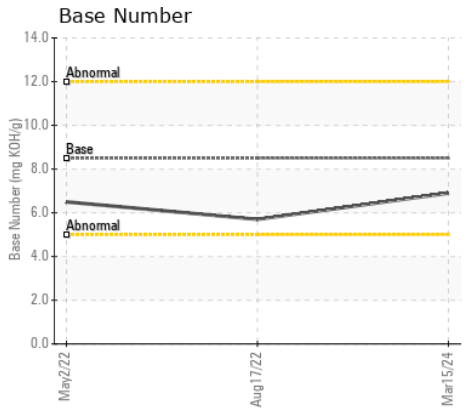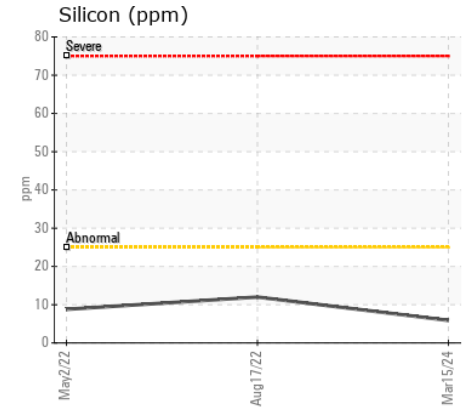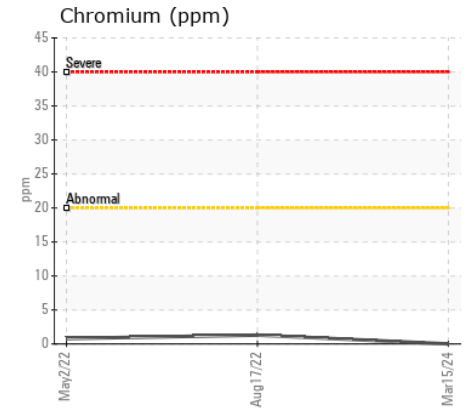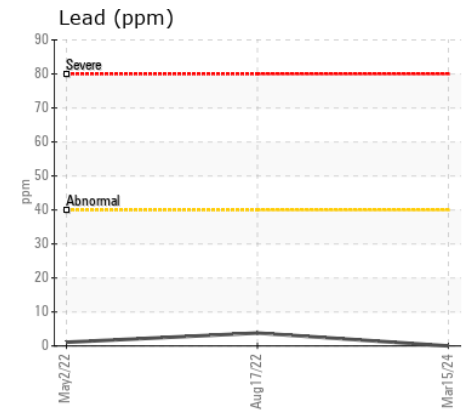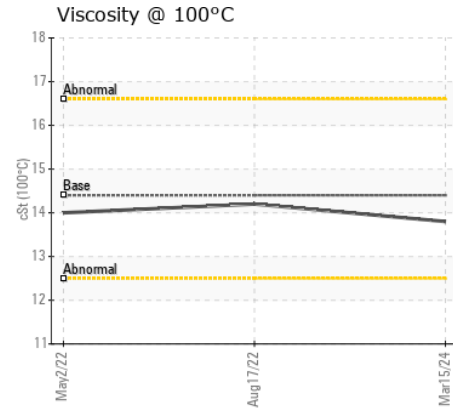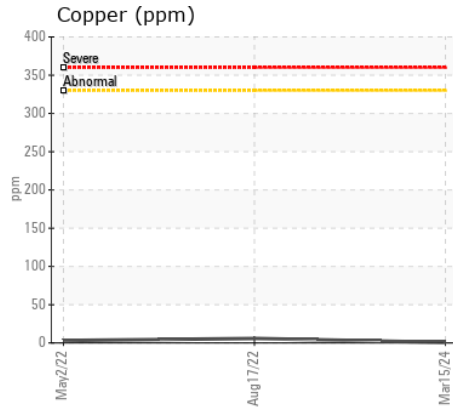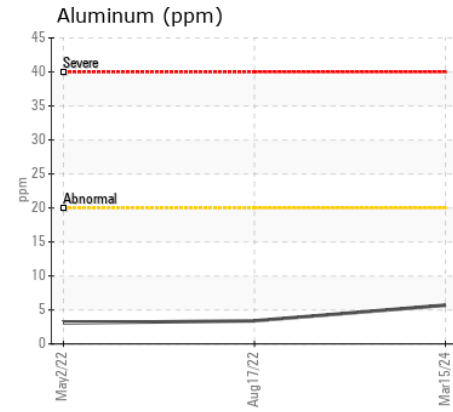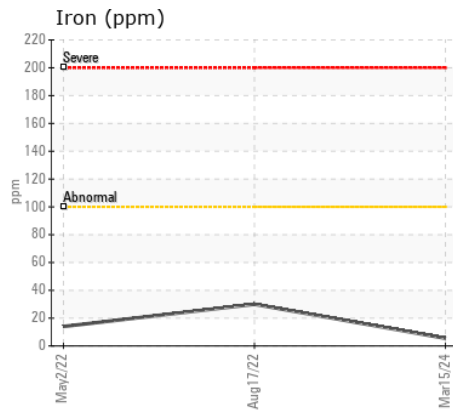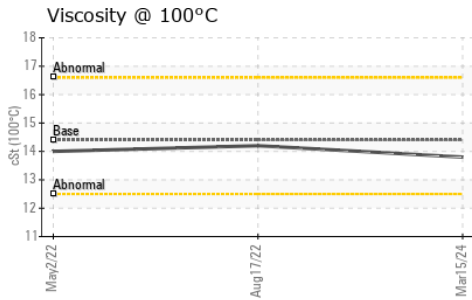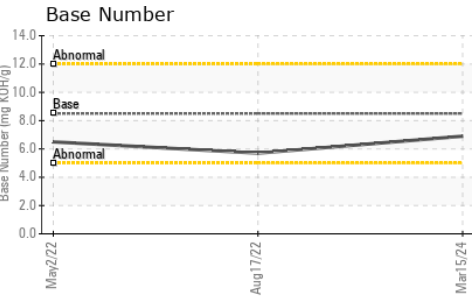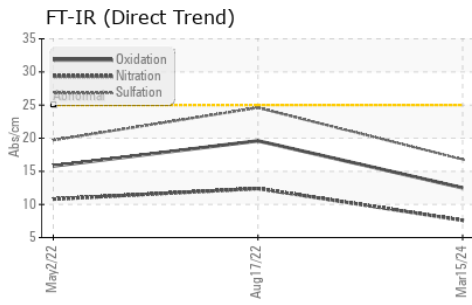

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0906104  
**Lab Number** : 06220884  
**Unique Number** : 11099081  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**Received** : 26 Jun 2024  
**Tested** : 27 Jun 2024  
**Diagnosed** : 27 Jun 2024 - Wes Davis

**WAKE COUNTY PUBLIC SCHOOL SYSTEM**  
 1551 ROCK QUARRY ROAD  
 RALEIGH, NC  
 US 27610

Contact: DEVIN WEBER  
 dweber@wcpss.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)856-8076

F: x: