WEAR CONTAMINATION FLUID CONDITION


NORMAL NORMAL NORMAL

Machine Id

1849

Component Diesel Engine

RECOMMENDATION	Test	UOM	Method	Limit/Abn	Current	History1	History2
	Sample Number		Client Info		WC0949009	WC0905842	
Resample at the next service interval to monitor. Please specify the component make and model with your next sample.	Sample Date		Client Info		17 Jun 2024	08 Mar 2024	14 Dec 2023
	Machine Age	mls	Client Info		19345	10846	4245
	Oil Age	mls	Client Info		0	0	0
	Filter Age	mls	Client Info		0	0	0
	Oil Changed		Client Info		Not Changd	Not Changd	Not Change
	Filter Changed		Client Info		Changed	Not Changd	Not Change
	Sample Status				NORMAL	ATTENTION	ABNORMAL
A/E A D			ACTA DE10E	100	44	F0	40
WEAR	Iron	ppm	ASTM D5185m		11	59	43
Metal levels are typical for a new component breaking in.	Chromium	ppm	ASTM D5185m		<1	2	1
	Nickel	ppm	ASTM D5185m	>4	0	<1	<1
	Titanium	ppm	ASTM D5185m		0	<1	<1
	Silver	ppm	ASTM D5185m		0	<1	0
	Aluminum	ppm	ASTM D5185m		21	25	7
	Lead	ppm	ASTM D5185m		0	<1	0
	Copper	ppm	ASTM D5185m		3	30	41
	Tin	ppm	ASTM D5185m	>15	0	1	<1
	Vanadium	ppm	ASTM D5185m	NONE	0	<1 NONE	0
	White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
	Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
CONTAMINATION	Silicon	ppm	ASTM D5185m	>25	8	33	23
	Potassium	ppm	ASTM D5185m	>20	53	74	1 98
Elevated aluminum (AI) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.	Fuel		WC Method	>5	<1.0	<1.0	<u>^</u> 2.1
	Water		WC Method	>0.2	NEG	NEG	NEG
	Glycol		WC Method		NEG	NEG	NEG
	Soot %	%	*ASTM D7844	>3	0.2	0.5	0.4
	Nitration	Abs/cm	*ASTM D7624	>20	9.0	11.9	9.8
	Sulfation	Abs/.1mm	*ASTM D7415	>30	18.6	21.9	20.7
	Silt	scalar	*Visual	NONE	NONE	NONE	NONE
	Debris	scalar	*Visual	NONE	NONE	NONE	NONE
	Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
	Appearance	scalar	*Visual	NORML	NORML	NORML	NORMI
	Odor	scalar	*Visual	NORML	NORML	NORML	NORMI
	Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
FLUID CONDITION	Sodium	ppm	ASTM D5185m	\158	2	7	14
LOID CONDITION	Boron	ppm	ASTM D5185m		62	30	21
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Barium	ppm	ASTM D5185m		0	5	10
	Molybdenum	ppm	ASTM D5185m		82	48	46
	Manganese	ppm	ASTM D5185m	100	0	6	5
	Magnesium	ppm	ASTM D5185m	450	116	726	767
	Calcium	ppm	ASTM D5185m	3000	1917	1173	1114
	Phosphorus	ppm	ASTM D5185m		888	672	728
	Zinc	ppm	ASTM D5185m		1177	866	856
	Sulfur	ppm	ASTM D5185m		3248	2355	2222
	Oxidation	Abs/.1mm	*ASTM D7414		14.7	22.0	19.1
	Base Number (BN)				6.6	5.8	8.2
	_ accambor (DIV)			0.0	7.0	0.0	J.L

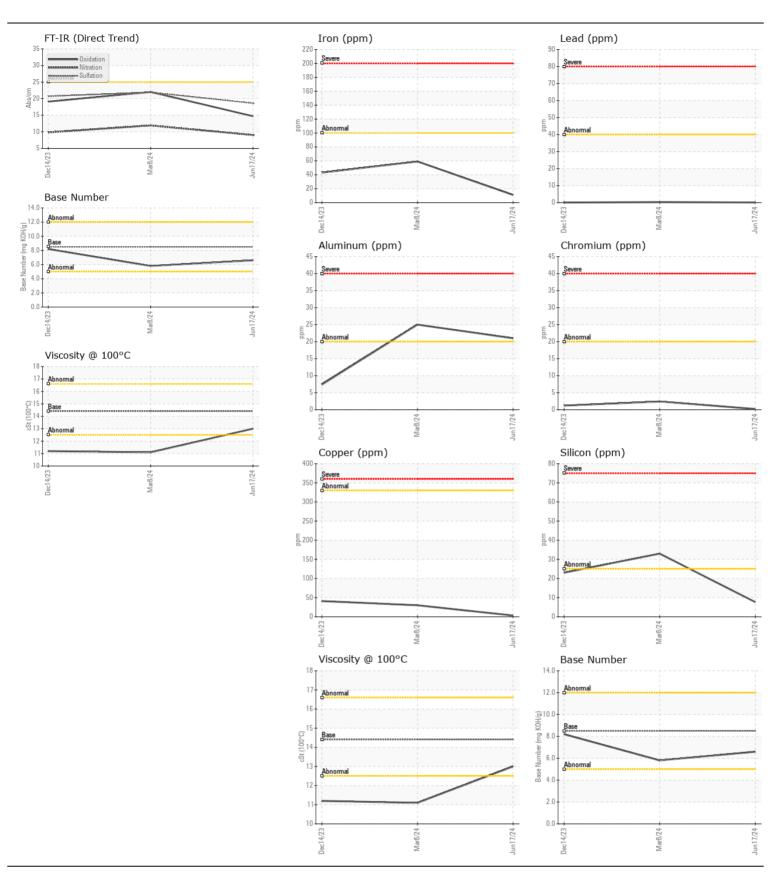



Certificate L2367

Laboratory Sample No. Lab Number : 06220922 Unique Number : 11099119

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : WC0949009

Test Package : MOB 1 (Additional Tests: TBN)

Received **Tested** Diagnosed

: 26 Jun 2024 : 27 Jun 2024

: 27 Jun 2024 - Wes Davis

WAKE COUNTY PUBLIC SCHOOL SYSTEM 1551 ROCK QUARRY ROAD RALEIGH, NC US 27610

Contact: DEVIN WEBER dweber@wcpss.net

To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)856-8076 F: x:

Contact/Location: DEVIN WEBER - WCPRAL