



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
FREE TRADE 255
Machine Id
VOLVO PENTA 2013913828
Component
Starboard Diesel Engine
Fluid
VOLVO PENTA SAE 15W40 (15 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA062995	VPA041424	---
Sample Date		Client Info		28 May 2024	15 Jun 2023	---
Machine Age	hrs	Client Info		0	525	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	6	24	---
Chromium	ppm	ASTM D5185m	>6	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	0	0	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	5	19	---
Lead	ppm	ASTM D5185m	>95	0	0	---
Copper	ppm	ASTM D5185m	>85	1	2	---
Tin	ppm	ASTM D5185m	>9	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	3	4	---
Potassium	ppm	ASTM D5185m	>20	4	5	---
Fuel		WC Method	>4.0	<1.0	<1.0	---
Water		WC Method	>0.1	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844		0.4	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	7.7	7.6	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	20.4	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	5	---
Boron	ppm	ASTM D5185m		3	1	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		62	62	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m		1003	1040	---
Calcium	ppm	ASTM D5185m		1085	1180	---
Phosphorus	ppm	ASTM D5185m		973	1113	---
Zinc	ppm	ASTM D5185m		1308	1377	---
Sulfur	ppm	ASTM D5185m		3054	4051	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.5	15.5	---
Base Number (BN)	mg KOH/g	ASTM D2896		9.2	9.7	---
Visc @ 100°C	cSt	ASTM D445		13.3	13.2	---

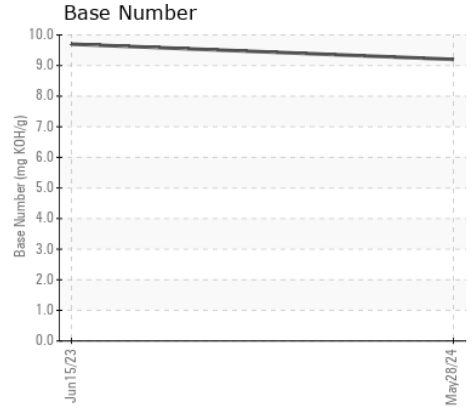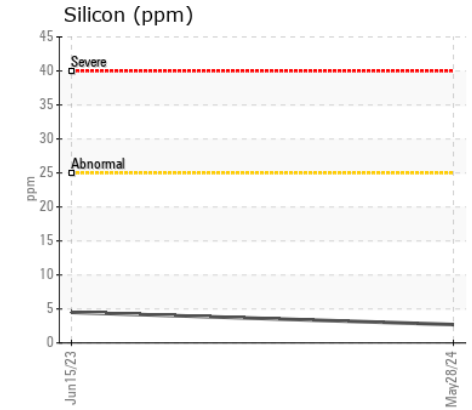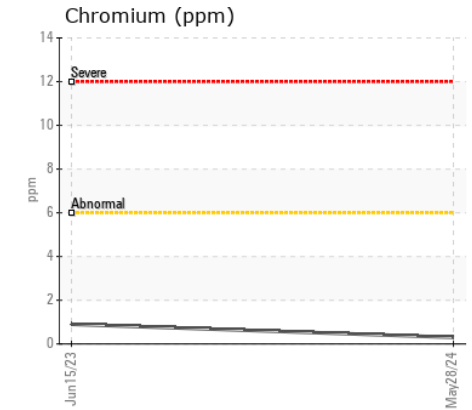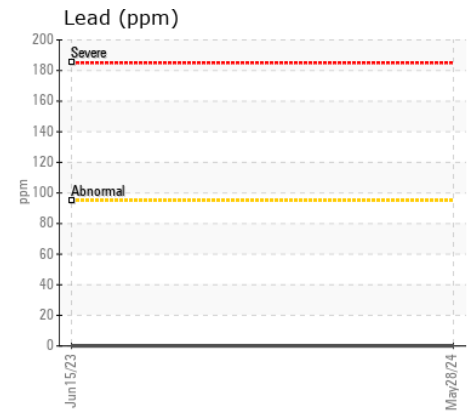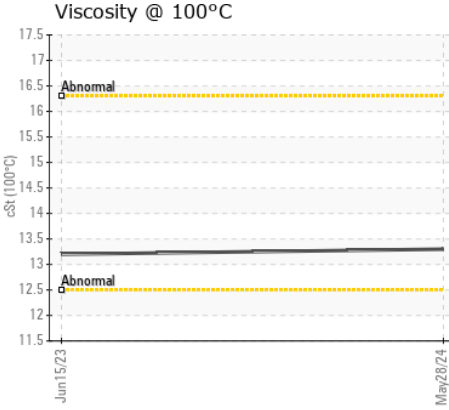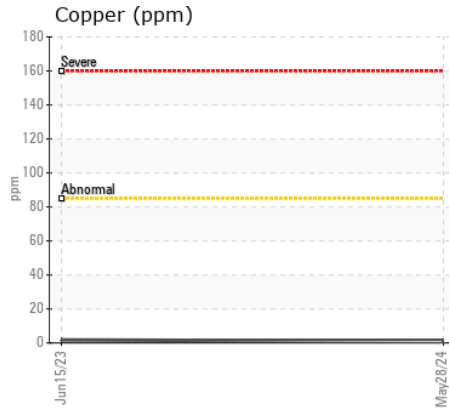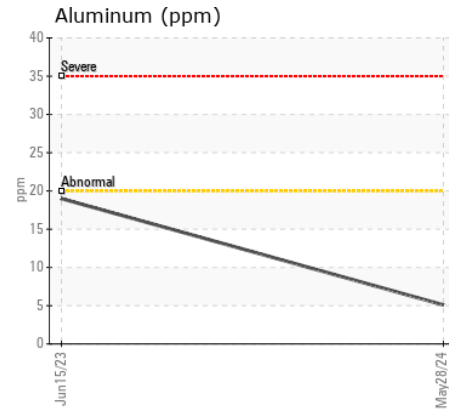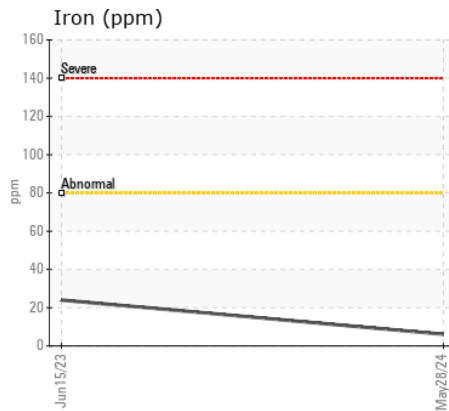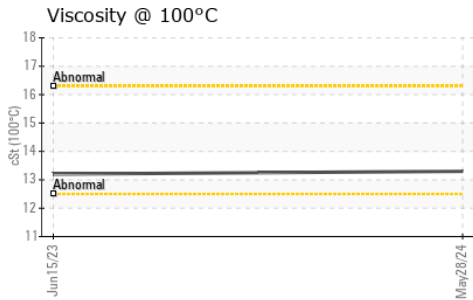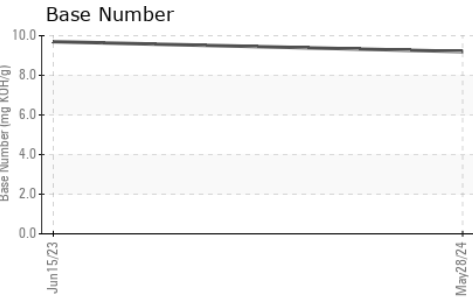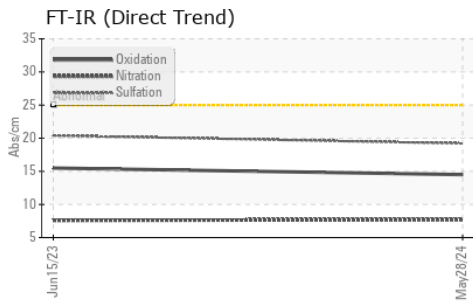

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA062995 **Received** : 26 Jun 2024
Lab Number : 06220990 **Tested** : 27 Jun 2024
Unique Number : 11099187 **Diagnosed** : 27 Jun 2024 - Don Baldrige
Test Package : MOB 1 (Additional Tests: TBN)

Marine International Diesels Inc.
 3600 HACIENDA BLVD UNIT G
 DAVIE, FL
 US 33314

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: JEF BURKE
 midjef@gmail.com; canastasio@wearcheckusa.com

T:
 F: