



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO VNR 2126903 (S/N 4V4WC9EH9MN600467)

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 10W30 (36 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PCA0094611	PCA0094602	PCA0094583
Sample Date		Client Info		11 Jun 2024	05 Dec 2023	13 Jul 2023
Machine Age	mls	Client Info		386040	324510	293256
Oil Age	mls	Client Info		32534	31254	24755
Filter Age	mls	Client Info		32534	31254	24755
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	17	25	17
Chromium	ppm	ASTM D5185m	>20	<1	<1	<1
Nickel	ppm	ASTM D5185m	>2	1	3	2
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>25	2	1	0
Lead	ppm	ASTM D5185m	>40	1	2	<1
Copper	ppm	ASTM D5185m	>330	4	4	3
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	3	5	3
Potassium	ppm	ASTM D5185m	>20	3	<1	0
Fuel		WC Method	>6.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.5	0.5	0.4
Nitration	Abs/cm	*ASTM D7624	>20	8.9	9.0	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	21.1	19.8
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	2	2
Boron	ppm	ASTM D5185m	2	1	1	0
Barium	ppm	ASTM D5185m	0	0	<1	0
Molybdenum	ppm	ASTM D5185m	50	64	58	67
Manganese	ppm	ASTM D5185m	0	0	0	<1
Magnesium	ppm	ASTM D5185m	950	952	923	993
Calcium	ppm	ASTM D5185m	1050	1104	1072	1167
Phosphorus	ppm	ASTM D5185m	995	917	901	1016
Zinc	ppm	ASTM D5185m	1180	1310	1180	1256
Sulfur	ppm	ASTM D5185m	2600	2581	2205	3290
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.9	16.9	15.6
Base Number (BN)	mg KOH/g	ASTM D2896		6.4	5.8	7.3
Visc @ 100°C	cSt	ASTM D445	12.00	11.2	11.0	11.1


FT-IR (Direct Trend)

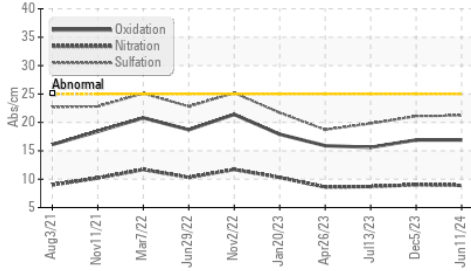


Base Number

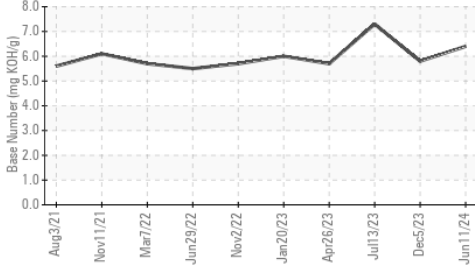


Viscosity @ 100°C

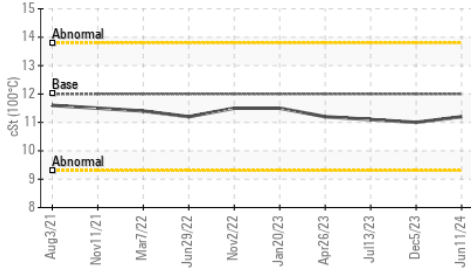


Ferrous Alloys

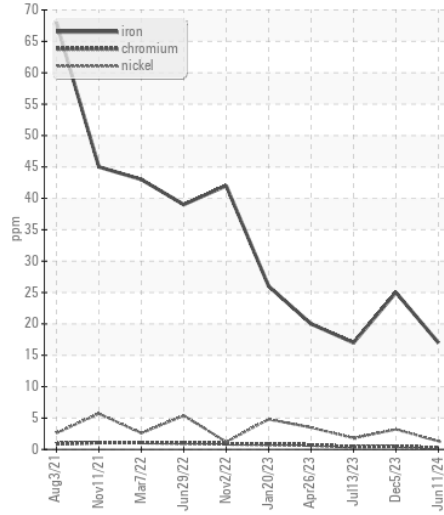


Non-ferrous Metals

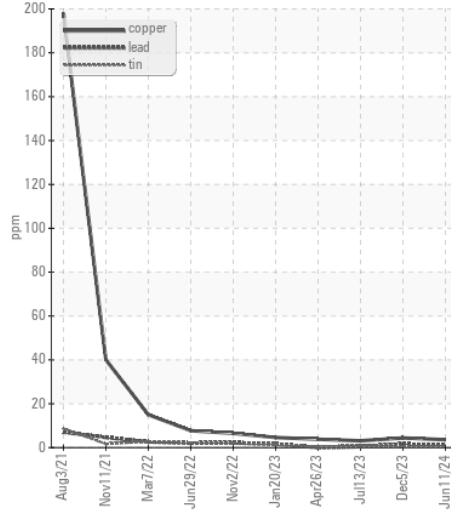

Viscosity @ 100°C

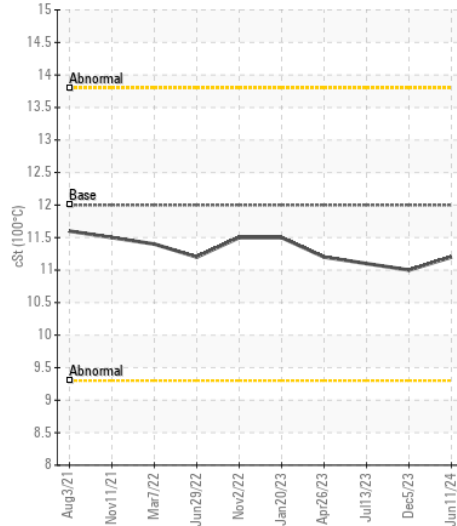

Base Number

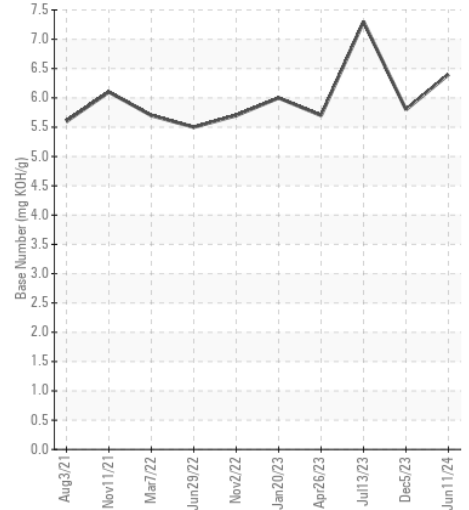

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : PCA0094611

Lab Number : 06220991

Unique Number : 11099188

Test Package : FLEET

Received : 26 Jun 2024

Tested : 27 Jun 2024

Diagnosed : 27 Jun 2024 - Wes Davis

PERDUE FARMS - WASHINGTON

P.O. BOX 539

WASHINGTON, IN

US 47501

Contact: DEREK RYAN

derek.ryan@perdue.com

T: (812)257-3023

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)