



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 1 - Cowen [152093]
Machine Id
JOHN DEERE 624P 1DW624PACMLZ13219
Component
Hydraulic System
Fluid
JOHN DEERE HYDRAU (27 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0049858	LEC0040517	LEC0041067
Sample Date		Client Info		24 Jun 2024	08 Feb 2024	04 Aug 2023
Machine Age	hrs	Client Info		3679	3146	2507
Oil Age	hrs	Client Info		1660	1127	488
Filter Age	hrs	Client Info		1660	1127	488
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				NORMAL	ATTENTION	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		16	16	7
Iron	ppm	ASTM D5185m	>20	2	3	2
Chromium	ppm	ASTM D5185m	>10	6	5	4
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	2	<1
Lead	ppm	ASTM D5185m	>10	0	<1	0
Copper	ppm	ASTM D5185m	>75	<1	1	1
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	1	<1	1
Potassium	ppm	ASTM D5185m	>20	4	4	3
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	2910	5523	1858
Particles >6µm		ASTM D7647	>1300	552	105	107
Particles >14µm		ASTM D7647	>160	92	15	8
Particles >21µm		ASTM D7647	>40	29	5	2
Particles >38µm		ASTM D7647	>10	1	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/16/14	20/14/11	18/14/10
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	0	3
Boron	ppm	ASTM D5185m		<1	0	0
Barium	ppm	ASTM D5185m		0	13	0
Molybdenum	ppm	ASTM D5185m		0	1	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		6	6	5
Calcium	ppm	ASTM D5185m	87	102	106	104
Phosphorus	ppm	ASTM D5185m	727	505	551	558
Zinc	ppm	ASTM D5185m	900	650	684	751
Sulfur	ppm	ASTM D5185m	1500	4448	4003	2830
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.58	0.38	0.48
Visc @ 40°C	cSt	ASTM D445	65	49.5	51.9	54.8

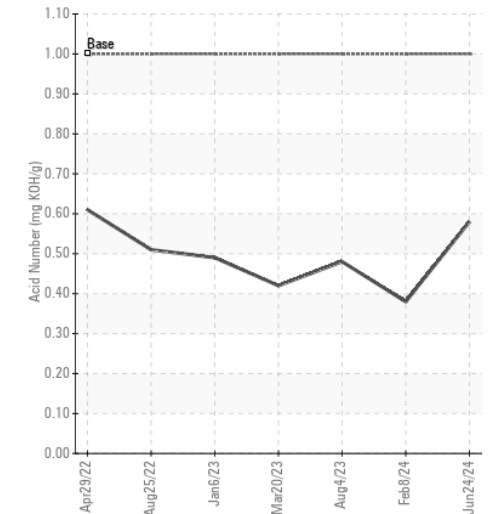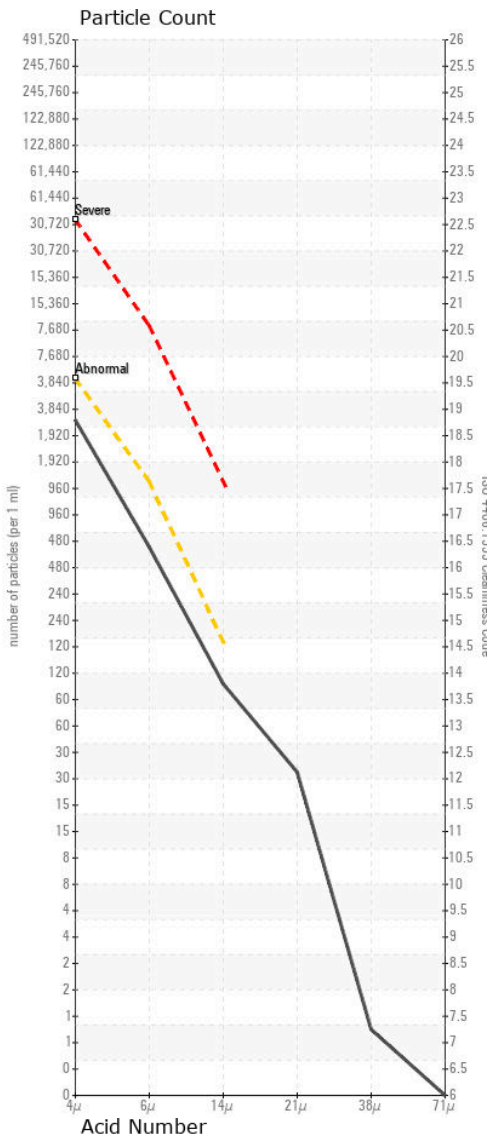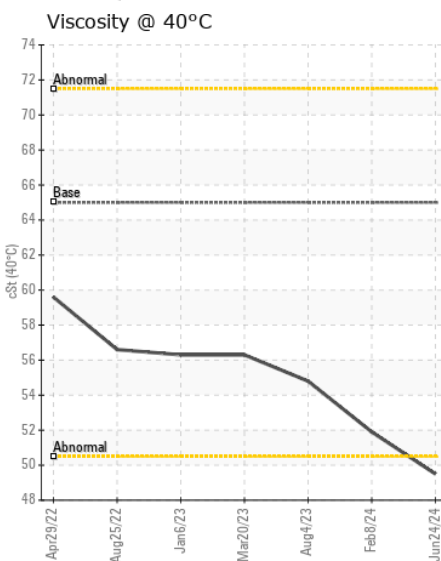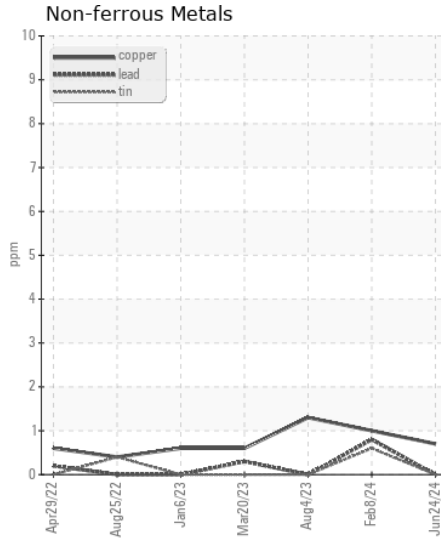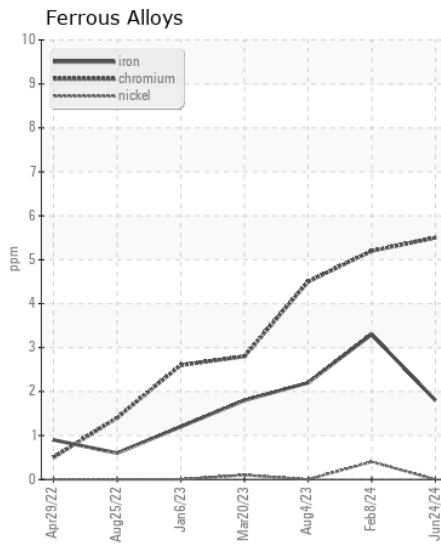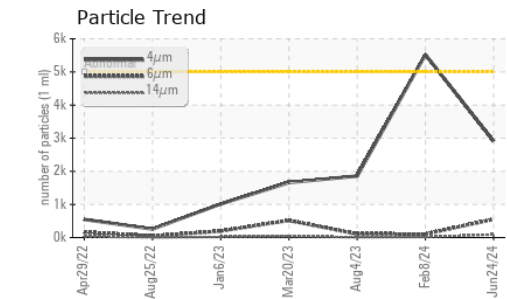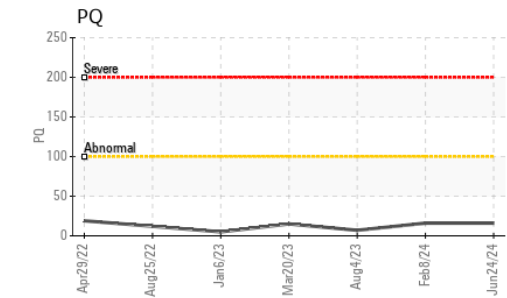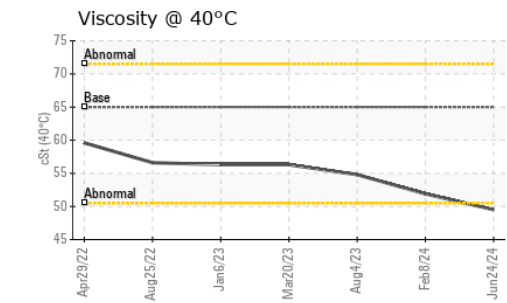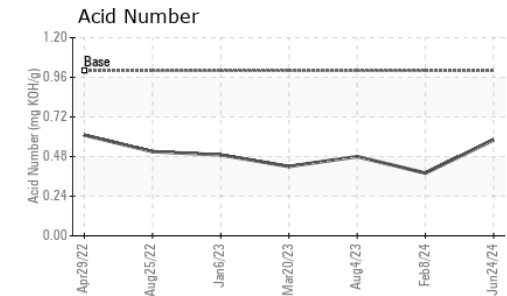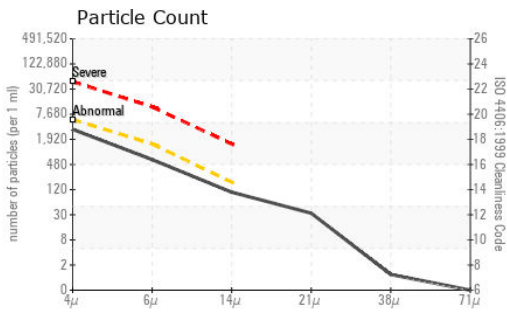

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0049858 **Received** : 26 Jun 2024
Lab Number : 06221108 **Tested** : 27 Jun 2024
Unique Number : 11099305 **Diagnosed** : 27 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (740)373-5570