



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 524L 1DW524LTPMF708707**

Component  
**Transmission (Manual)**

Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0220970</b>	JR0214079	JR0201125
Sample Date		Client Info		<b>25 Jun 2024</b>	13 May 2024	08 Mar 2024
Machine Age	hrs	Client Info		<b>18541</b>	18106	17467
Oil Age	hrs	Client Info		<b>435</b>	14693	14910
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	<b>18</b>	18	13
Iron	ppm	ASTM D5185m	>200	<b>10</b>	14	14
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>7	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	<1	<1
Lead	ppm	ASTM D5185m	>45	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>225	<b>3</b>	3	4
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	<b>3</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	<1	2
Boron	ppm	ASTM D5185m	6	<b>1</b>	0	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	145	<b>95</b>	93	90
Calcium	ppm	ASTM D5185m	3570	<b>3418</b>	3360	3190
Phosphorus	ppm	ASTM D5185m	1290	<b>1084</b>	989	960
Zinc	ppm	ASTM D5185m	1640	<b>1253</b>	1184	1071
Sulfur	ppm	ASTM D5185m		<b>3884</b>	3738	3512
Visc @ 40°C	cSt	ASTM D445	57.0	<b>53.2</b>	58.5	52.0

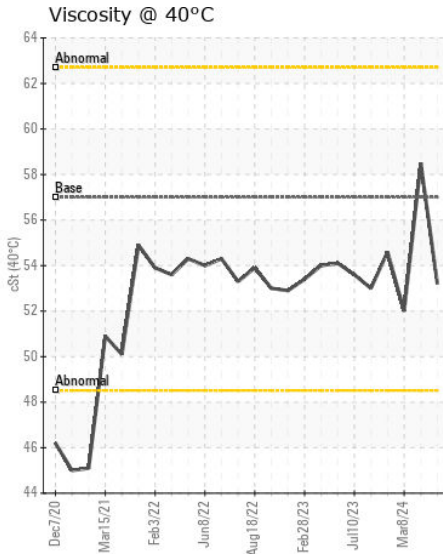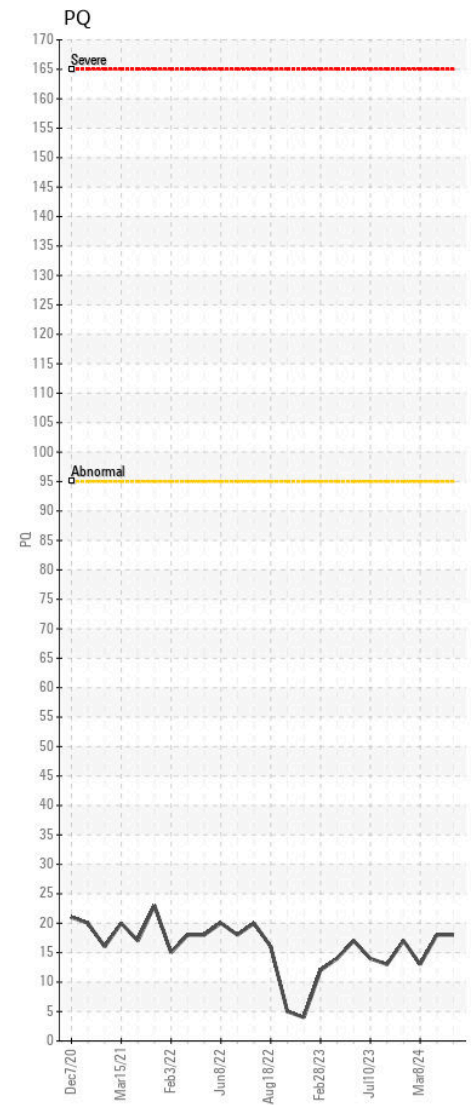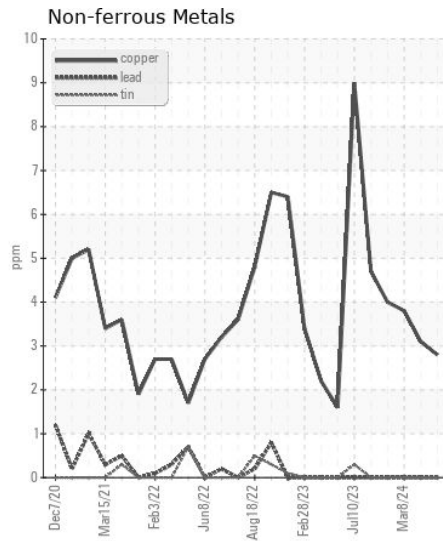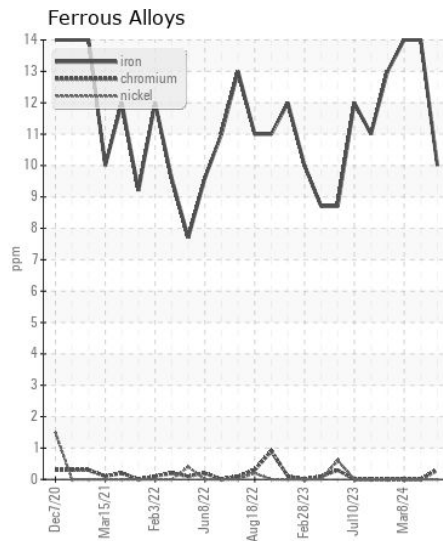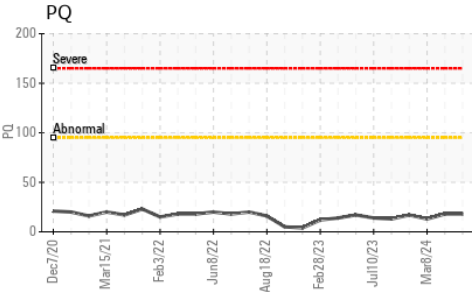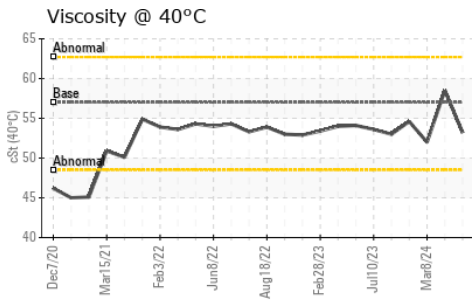

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0220970 **Received** : 26 Jun 2024  
**Lab Number** : 06221450 **Tested** : 27 Jun 2024  
**Unique Number** : 11099647 **Diagnosed** : 27 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - NEW BERN**  
 3816 MARTIN LUTHER KING BLVD  
 NEW BERN, NC  
 US 28562  
 Contact: NEW BERN SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

nick.etheridge@jamesriverequipment.com; canastasio@wearcheckusa.com

T:  
F: