



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 410E 1DW410EBHNF716068
Component
Transmission (Auto)
Fluid
JOHN DEERE HD SynTran (12 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0220063	JR0215602	JR0192731
Sample Date		Client Info		24 Jun 2024	28 May 2024	16 Nov 2023
Machine Age	mls	Client Info		2511	4751682	4751682
Oil Age	mls	Client Info		0	4751682	4751682
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	20	34	16
Iron	ppm	ASTM D5185m	>160	40	73	47
Chromium	ppm	ASTM D5185m	>5	<1	0	0
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	3	<1	0
Lead	ppm	ASTM D5185m	>50	<1	0	<1
Copper	ppm	ASTM D5185m	>225	1	2	2
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	3	7	5
Potassium	ppm	ASTM D5185m	>20	2	2	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	3	4
Boron	ppm	ASTM D5185m	168	127	115	118
Barium	ppm	ASTM D5185m		<1	2	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m		1	2	0
Calcium	ppm	ASTM D5185m	33	62	161	93
Phosphorus	ppm	ASTM D5185m	330	290	286	228
Zinc	ppm	ASTM D5185m	0	26	27	0
Sulfur	ppm	ASTM D5185m	980	357	560	300
Visc @ 40°C	cSt	ASTM D445	39	37.2	36.5	37.0

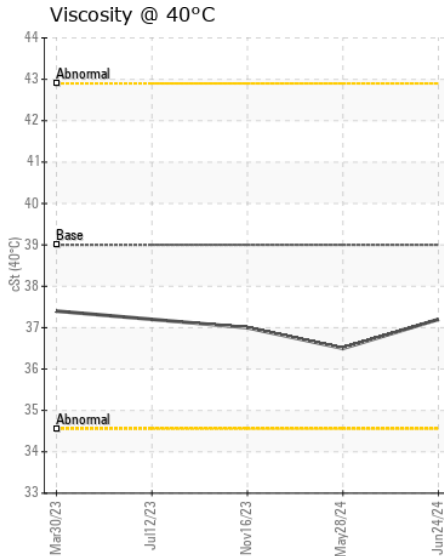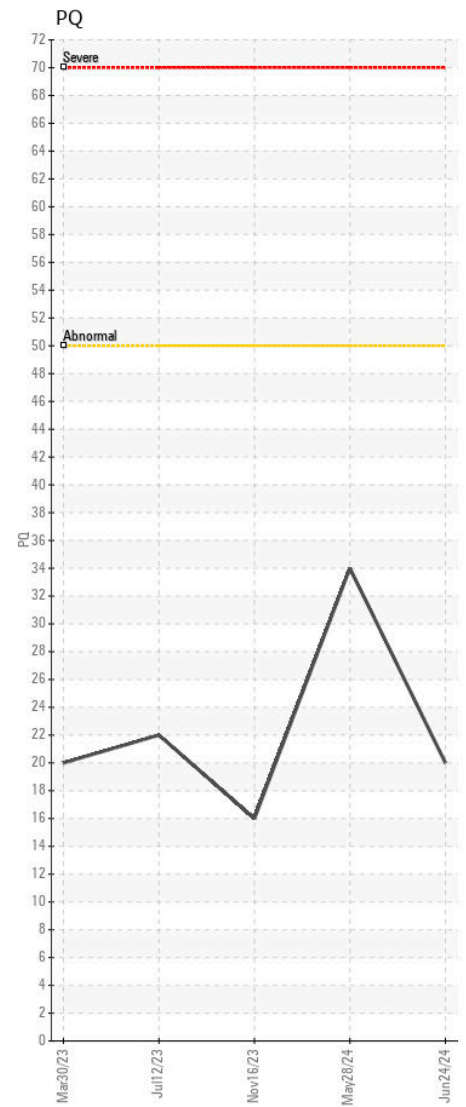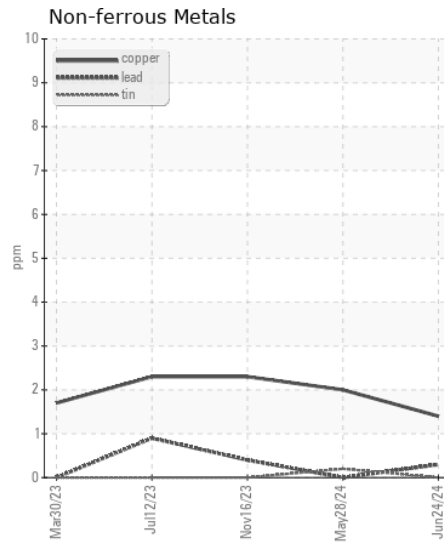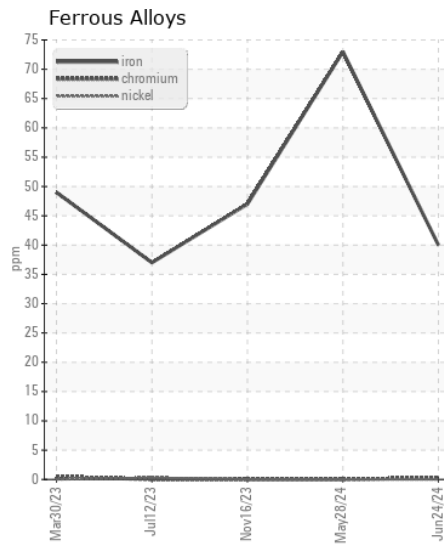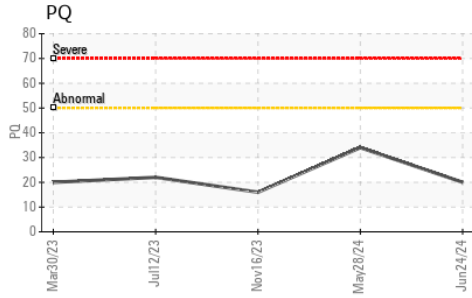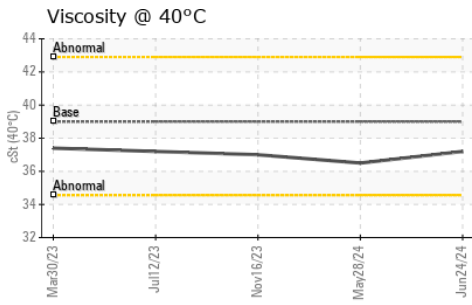

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0220063

Lab Number : 06221455

Unique Number : 11099652

Test Package : CONST (Additional Tests: PQ)

Received : 26 Jun 2024

Tested : 27 Jun 2024

Diagnosed : 27 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - CHARLOTTE

9550 STATESVILLE ROAD

CHARLOTTE, NC

US 28269

Contact: CHARLOTTE SHOP

myoung@jamesriverequipment.com

T: (704)597-0211

F: (704)596-6198