



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W9094]

Machine Id

JOHN DEERE 410L 1T0410LXKPF435467

Component

Transmission (Manual)

Fluid

JOHN DEERE HY-GARD HYD/TRANS (4 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W9094)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0197137	---	---
Sample Date		Client Info		25 Jun 2024	---	---
Machine Age	hrs	Client Info		541	---	---
Oil Age	hrs	Client Info		541	---	---
Filter Age	hrs	Client Info		541	---	---
Oil Changed		Client Info		Not Changed	---	---
Filter Changed		Client Info		Not Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>95	23	---	---
Iron	ppm	ASTM D5185m	>200	31	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>7	0	---	---
Aluminum	ppm	ASTM D5185m	>25	6	---	---
Lead	ppm	ASTM D5185m	>45	2	---	---
Copper	ppm	ASTM D5185m	>225	19	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>125	7	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		5	---	---
Boron	ppm	ASTM D5185m	6	21	---	---
Barium	ppm	ASTM D5185m	0	2	---	---
Molybdenum	ppm	ASTM D5185m	0	<1	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	145	90	---	---
Calcium	ppm	ASTM D5185m	3570	3647	---	---
Phosphorus	ppm	ASTM D5185m	1290	1174	---	---
Zinc	ppm	ASTM D5185m	1640	1386	---	---
Sulfur	ppm	ASTM D5185m		4389	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	42.9	---	---

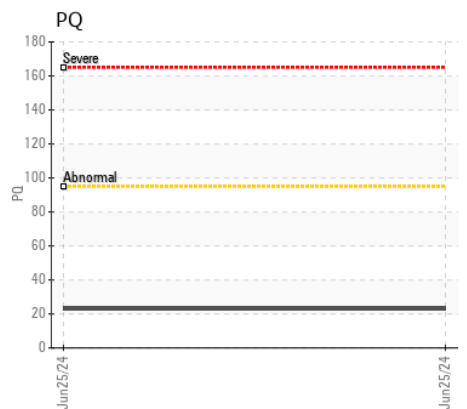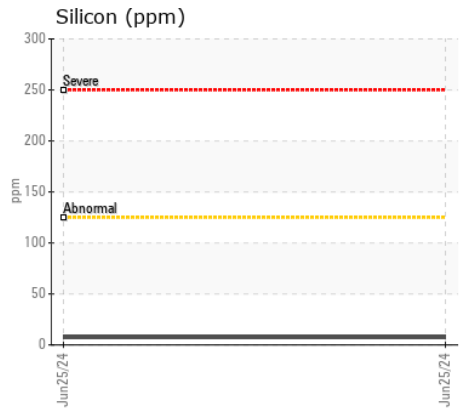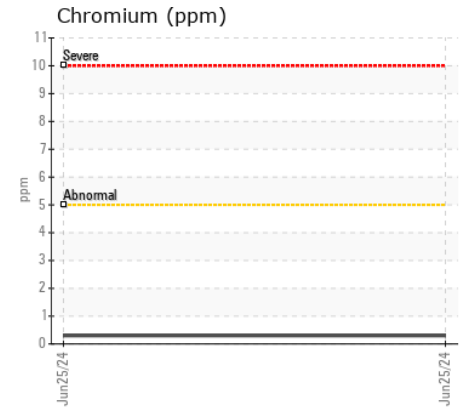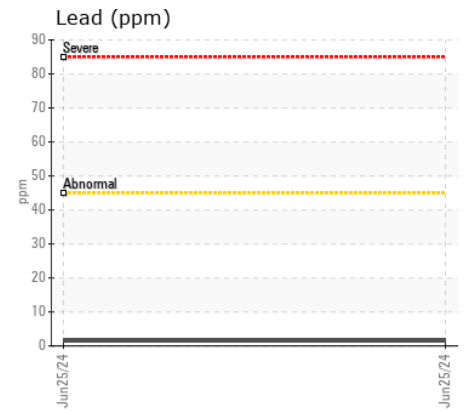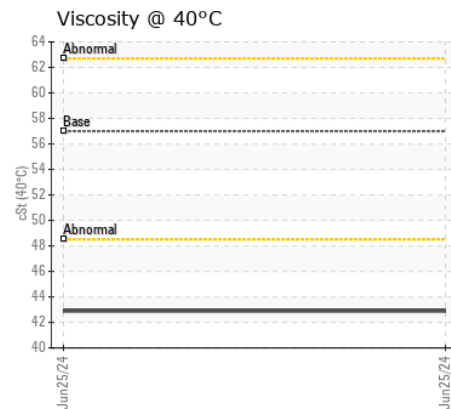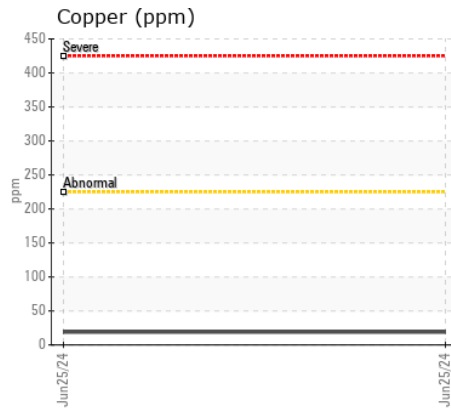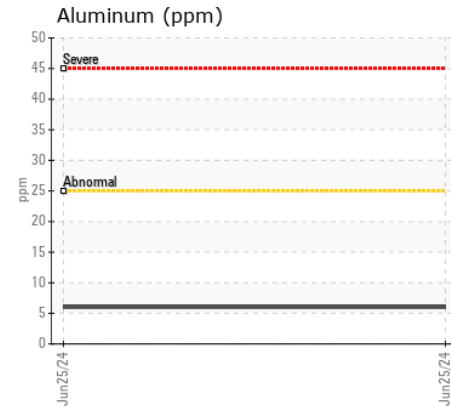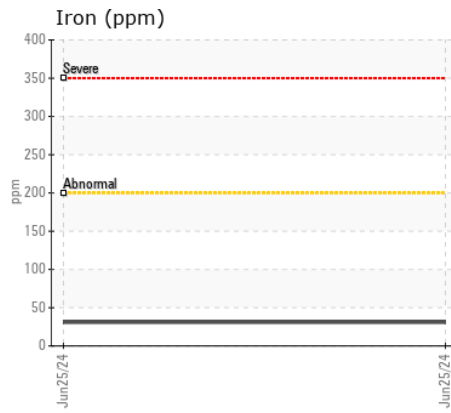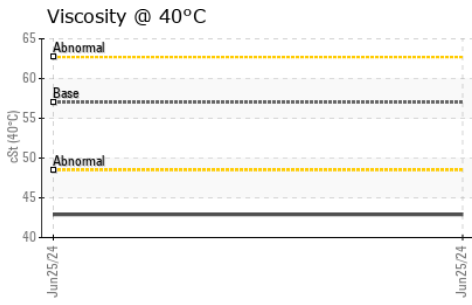

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0197137 **Received** : 26 Jun 2024
Lab Number : 06221457 **Tested** : 28 Jun 2024
Unique Number : 11099654 **Diagnosed** : 28 Jun 2024 - Sean Felton
Test Package : MOBCE (Additional Tests: PQ)

JRE - HOPE MILLS/FAYETTEVILLE
 5039 HWY 301 SOUTH
 HOPE MILLS, NC
 US 28348
 Contact: FAYETTEVILLE SHOP
 stephen.mullis@jamesriverequipment.com;canastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: