



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 85G PM061145 (S/N 1FF085GXVGJ018786)

Component
Right Final Drive

Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0221378	JR0170330	JR0137690
Sample Date		Client Info		24 Jun 2024	08 Aug 2023	17 Aug 2022
Machine Age	hrs	Client Info		4508	3971	3379
Oil Age	hrs	Client Info		3971	0	0
Filter Age	hrs	Client Info		3971	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	462	441	1719
Iron	ppm	ASTM D5185m	>750	325	540	▲ 1609
Chromium	ppm	ASTM D5185m	>9	4	6	▲ 15
Nickel	ppm	ASTM D5185m	>10	3	3	7
Titanium	ppm	ASTM D5185m		1	2	5
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	7	10	● 29
Lead	ppm	ASTM D5185m	>15	<1	0	<1
Copper	ppm	ASTM D5185m	>40	1	2	6
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	HEAVY	MODER	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	33	39	▲ 111
Potassium	ppm	ASTM D5185m	>20	3	4	6
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	MODER	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	2	0
Boron	ppm	ASTM D5185m		11	12	24
Barium	ppm	ASTM D5185m		4	0	26
Molybdenum	ppm	ASTM D5185m		<1	<1	<1
Manganese	ppm	ASTM D5185m		3	5	14
Magnesium	ppm	ASTM D5185m		6	4	3
Calcium	ppm	ASTM D5185m		47	7	8
Phosphorus	ppm	ASTM D5185m		964	460	323
Zinc	ppm	ASTM D5185m		31	24	90
Sulfur	ppm	ASTM D5185m		22037	22107	16800
Visc @ 40°C	cSt	ASTM D445		133	140	149

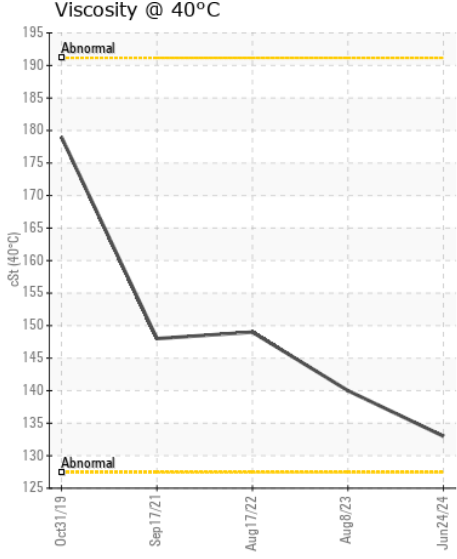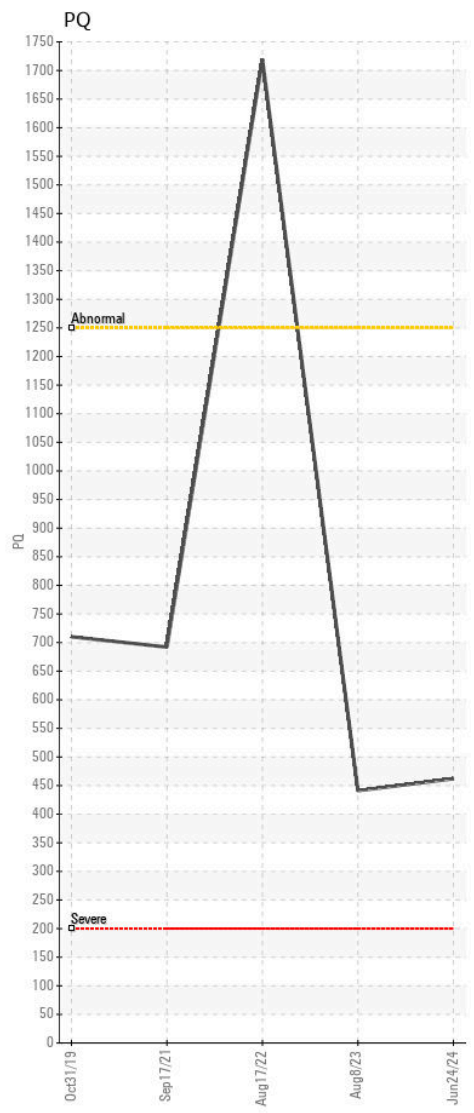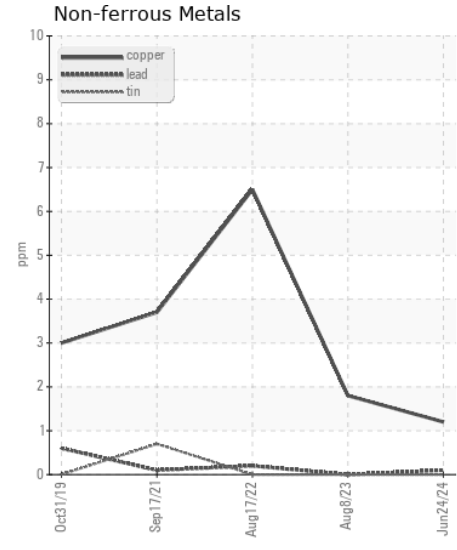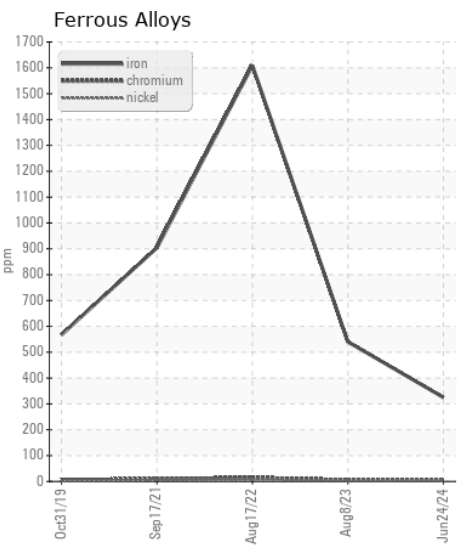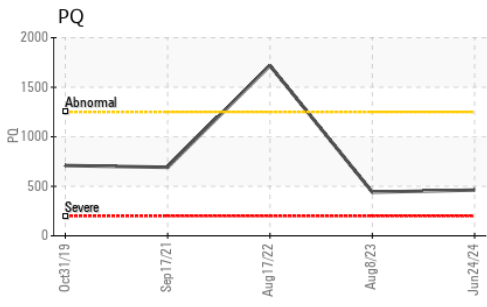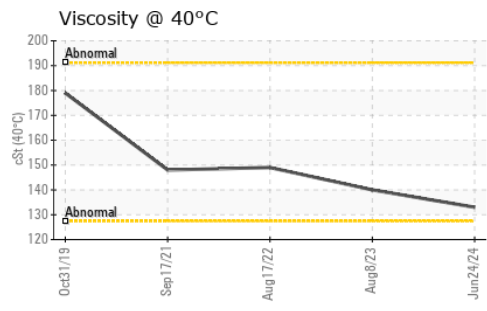

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0221378 **Received** : 26 Jun 2024
Lab Number : 06221470 **Tested** : 27 Jun 2024
Unique Number : 11099667 **Diagnosed** : 28 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - STEPHENSON
 245 YARDMASTER COURT
 STEPHENSON, VA
 US 22656-1761
 Contact: PHIL DAUGHERTY
 pdaugherty@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) T: x: F: (540)693-2588