



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 350P 1FF350PATPF000479**  
 Component  
**Swing Drive Gear Case**  
 Fluid  
**JOHN DEERE GL-5 80W90 (3 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0220740</b>	JR0214107	JR0202527
Sample Date		Client Info		<b>21 Jun 2024</b>	29 May 2024	27 Feb 2024
Machine Age	hrs	Client Info		<b>2007</b>	1549	1028
Oil Age	hrs	Client Info		<b>1486</b>	521	1
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Not Changd	Changed
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>32</b>	35	37
Iron	ppm	ASTM D5185m	>200	<b>68</b>	178	54
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m		<b>0</b>	7	0
Lead	ppm	ASTM D5185m		<b>0</b>	0	0
Copper	ppm	ASTM D5185m		<b>0</b>	<1	0
Tin	ppm	ASTM D5185m		<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>10</b>	58	16
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	<1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Boron	ppm	ASTM D5185m		<b>22</b>	16	76
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	2	2
Magnesium	ppm	ASTM D5185m		<b>5</b>	2	0
Calcium	ppm	ASTM D5185m		<b>27</b>	9	62
Phosphorus	ppm	ASTM D5185m		<b>398</b>	358	544
Zinc	ppm	ASTM D5185m		<b>14</b>	7	6
Sulfur	ppm	ASTM D5185m		<b>20877</b>	19895	16016
Visc @ 40°C	cSt	ASTM D445		<b>149</b>	149	187

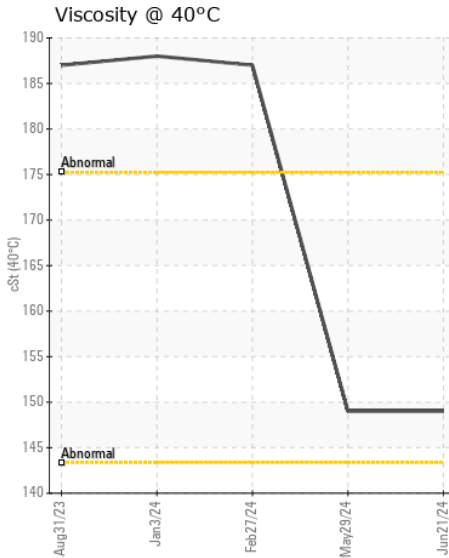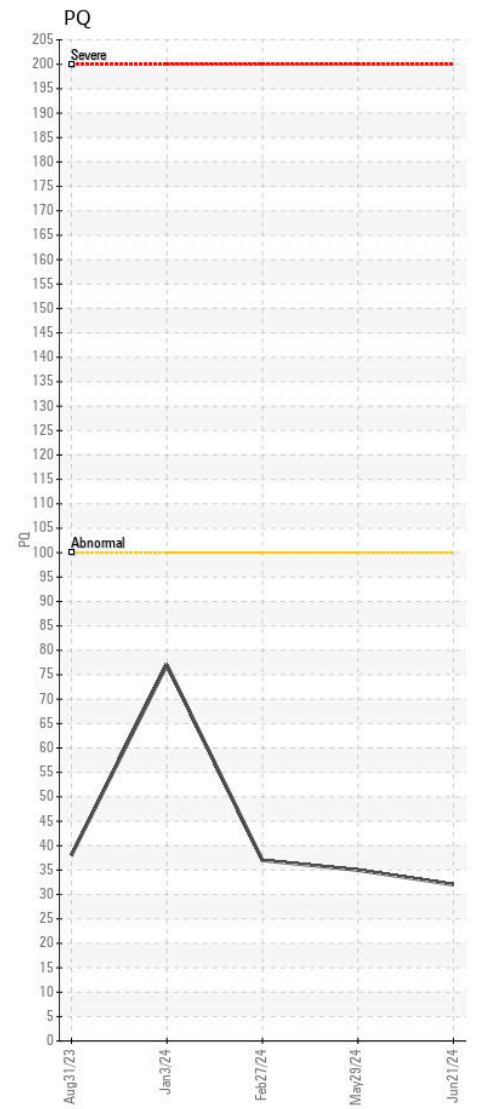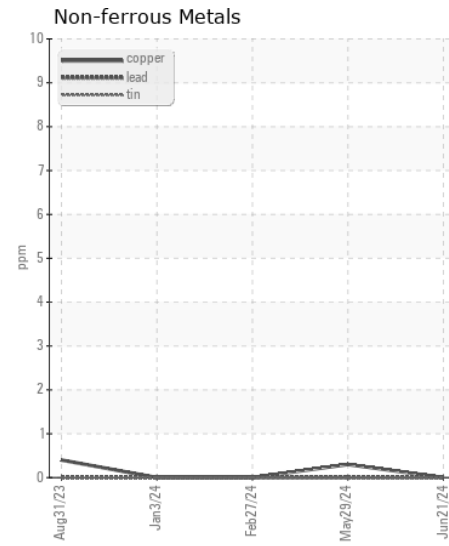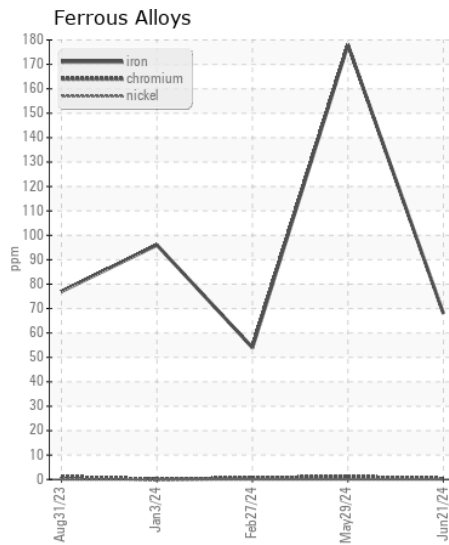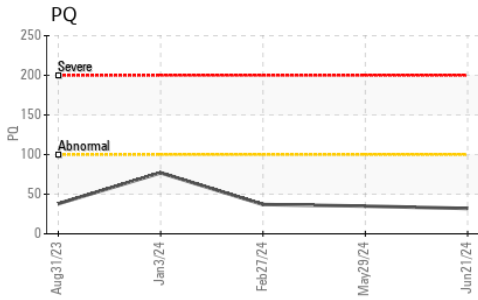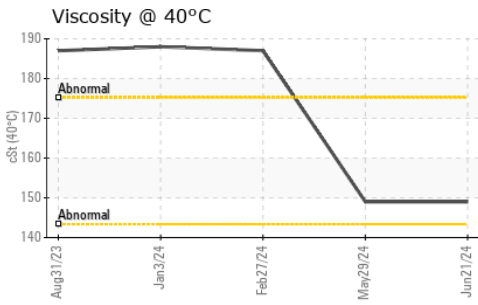

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : JR0220740

**Lab Number** : 06221477

**Unique Number** : 11099674

**Test Package** : CONST ( Additional Tests: PQ )

**Received** : 26 Jun 2024

**Tested** : 27 Jun 2024

**Diagnosed** : 28 Jun 2024 - Sean Felton

**JRE - NEW BERN**  
3816 MARTIN LUTHER KING BLVD  
NEW BERN, NC  
US 28562

Contact: NEW BERN SHOP

nick.etherdridge@jamesriverequipment.com;canastasio@wearcheckusa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: