



Machine Id  
**JOHN DEERE S550 1H0S550SPD0755174**  
 Component  
**90° Gearbox**  
 Fluid  
**JOHN DEERE GL-5 80W90 (--- GAL)**

### RECOMMENDATION

We advise that you check all areas where dirt can enter the system. We recommend that you drain the oil from the component if this has not already been done. We advise that you inspect for the source(s) of wear. We recommend an early resample to monitor this condition.

### WEAR

Gear wear is indicated.










### CONTAMINATION

Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress. Moderate concentration of visible dirt/debris present in the oil.

### FLUID CONDITION

The oil is no longer serviceable due to the presence of contaminants.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0216857</b>	---	---
Sample Date		Client Info		<b>25 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>1029</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Changd</b>	---	---
Filter Changed		Client Info		<b>Not Changd</b>	---	---
Sample Status				<b>SEVERE</b>	---	---
PQ		ASTM D8184		<b>▲ 142</b>	---	---
Iron	ppm	ASTM D5185m	>200	<b>▲ 1872</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>▲ 10</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>25	<b>● 7</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>200	<b>1</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silicon	ppm	ASTM D5185m	>50	<b>▲ 121</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>▲ MODER</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---
Sodium	ppm	ASTM D5185m		<b>5</b>	---	---
Boron	ppm	ASTM D5185m		<b>24</b>	---	---
Barium	ppm	ASTM D5185m		<b>7</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>22</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>1</b>	---	---
Calcium	ppm	ASTM D5185m		<b>36</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>378</b>	---	---
Zinc	ppm	ASTM D5185m		<b>25</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>15912</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>138</b>	---	---

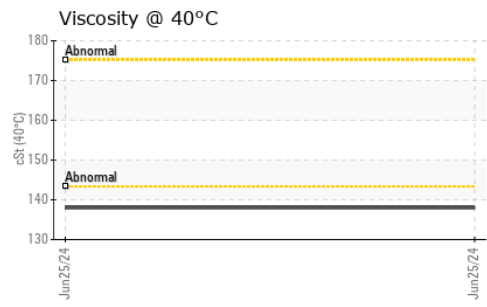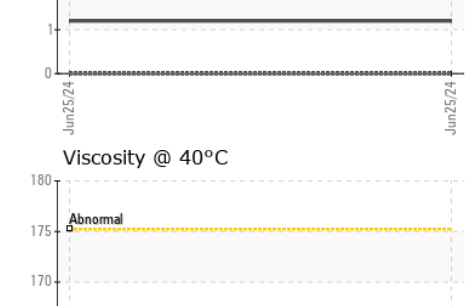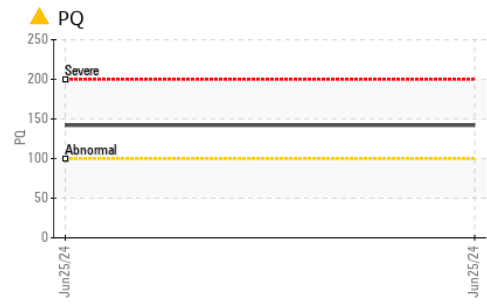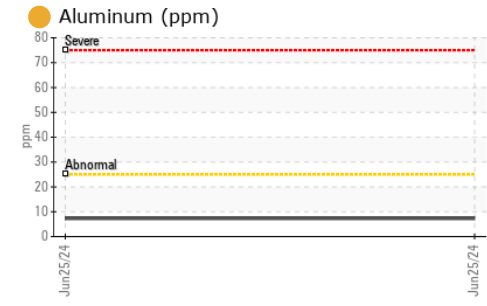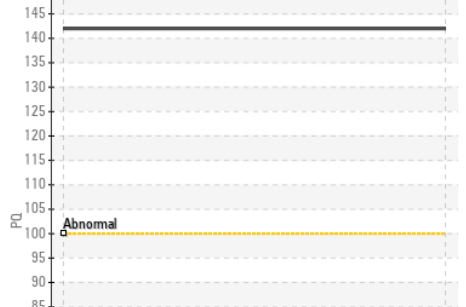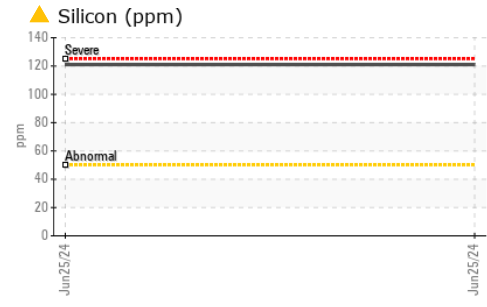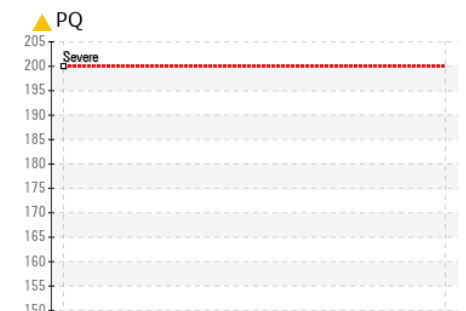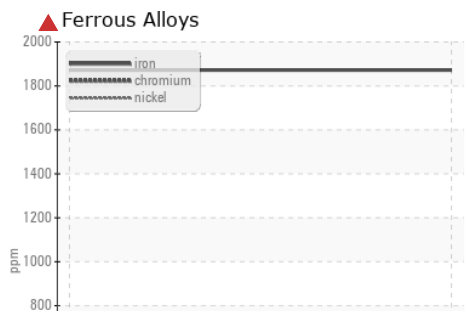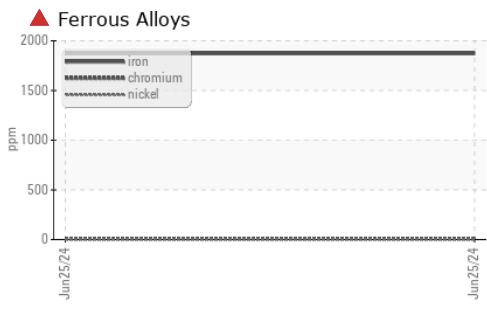

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0216857 **Received** : 26 Jun 2024  
**Lab Number** : 06221507 **Tested** : 27 Jun 2024  
**Unique Number** : 11099704 **Diagnosed** : 28 Jun 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - WAKEFIELD**  
 10489 GENERAL MAHONE HWY  
 WAKEFIELD, VA  
 US 23888  
 Contact: BILL ACKER  
 backer@jamesriverequipment.com  
 T: (757)899-3232  
 F: (757)899-6464

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)