



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 748L 718499**  
 Component  
**Front Differential**  
 Fluid  
**TDH FLUID SAE 75W80 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0213617</b>	JR0204686	---
Sample Date		Client Info		<b>25 Jun 2024</b>	01 Apr 2024	---
Machine Age	hrs	Client Info		<b>974</b>	445	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>24</b>	43	---
Iron	ppm	ASTM D5185m	>500	<b>48</b>	84	---
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>&lt;1</b>	1	---
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	1	---
Copper	ppm	ASTM D5185m	>100	<b>13</b>	8	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>5</b>	8	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	---
Water		WC Method	>.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>3</b>	11	---
Boron	ppm	ASTM D5185m	10	<b>34</b>	1	---
Barium	ppm	ASTM D5185m	10	<b>&lt;1</b>	3	---
Molybdenum	ppm	ASTM D5185m	10	<b>29</b>	0	---
Manganese	ppm	ASTM D5185m		<b>1</b>	5	---
Magnesium	ppm	ASTM D5185m	100	<b>187</b>	95	---
Calcium	ppm	ASTM D5185m	3500	<b>3248</b>	3460	---
Phosphorus	ppm	ASTM D5185m	1150	<b>1032</b>	1129	---
Zinc	ppm	ASTM D5185m	1150	<b>1247</b>	1289	---
Sulfur	ppm	ASTM D5185m	5000	<b>4220</b>	4497	---
Visc @ 40°C	cSt	ASTM D445	48	<b>55.5</b>	52.0	---

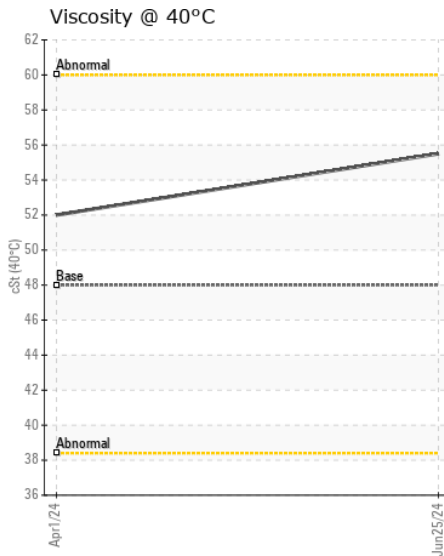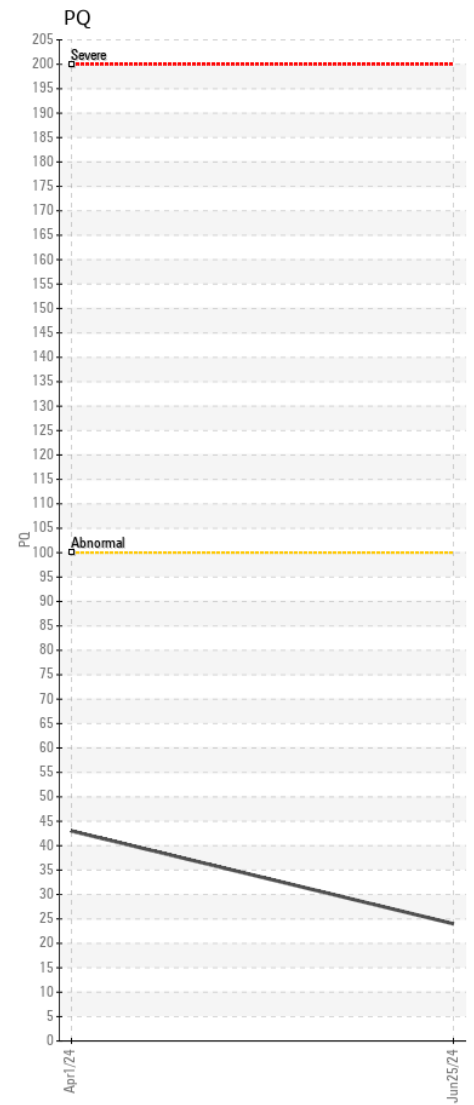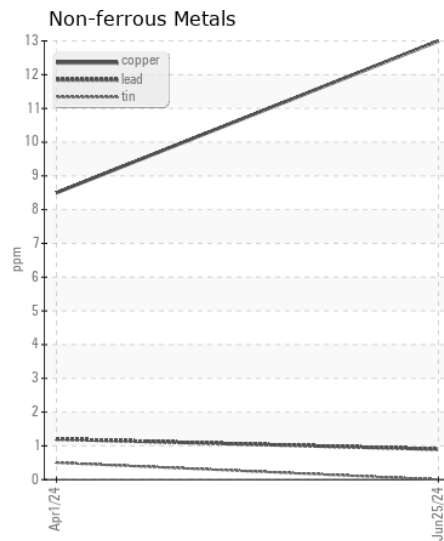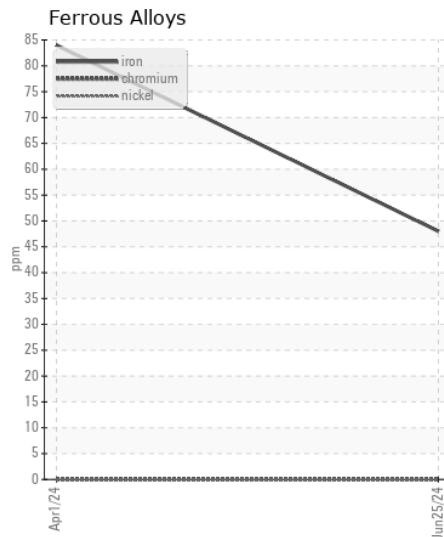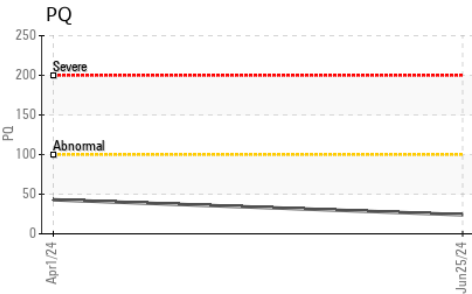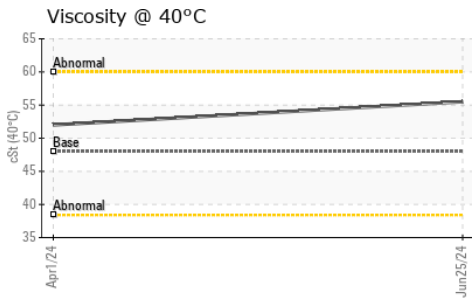

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0213617 **Received** : 26 Jun 2024  
**Lab Number** : 06221516 **Tested** : 27 Jun 2024  
**Unique Number** : 11099713 **Diagnosed** : 28 Jun 2024 - Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409  
 Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM  
 T: (336)668-2762  
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)