



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 748L 718499
 Component
Rear Differential
 Fluid
TDH FLUID SAE 75W80 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0213616	JR0204687	---
Sample Date		Client Info		25 Jun 2024	01 Apr 2024	---
Machine Age	hrs	Client Info		974	445	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		138	192	---
Iron	ppm	ASTM D5185m	>500	214	214	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	1	1	---
Lead	ppm	ASTM D5185m	>25	1	1	---
Copper	ppm	ASTM D5185m	>100	16	10	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	MODER	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	6	9	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	9	---
Boron	ppm	ASTM D5185m	10	31	1	---
Barium	ppm	ASTM D5185m	10	2	5	---
Molybdenum	ppm	ASTM D5185m	10	27	0	---
Manganese	ppm	ASTM D5185m		4	8	---
Magnesium	ppm	ASTM D5185m	100	175	94	---
Calcium	ppm	ASTM D5185m	3500	3209	3449	---
Phosphorus	ppm	ASTM D5185m	1150	1001	1117	---
Zinc	ppm	ASTM D5185m	1150	1200	1296	---
Sulfur	ppm	ASTM D5185m	5000	4030	4507	---
Visc @ 40°C	cSt	ASTM D445	48	55.1	51.9	---

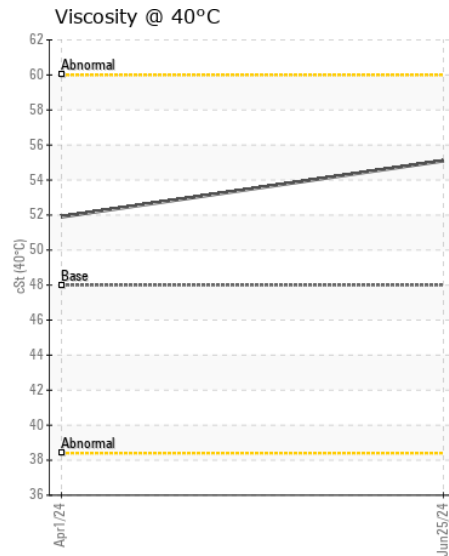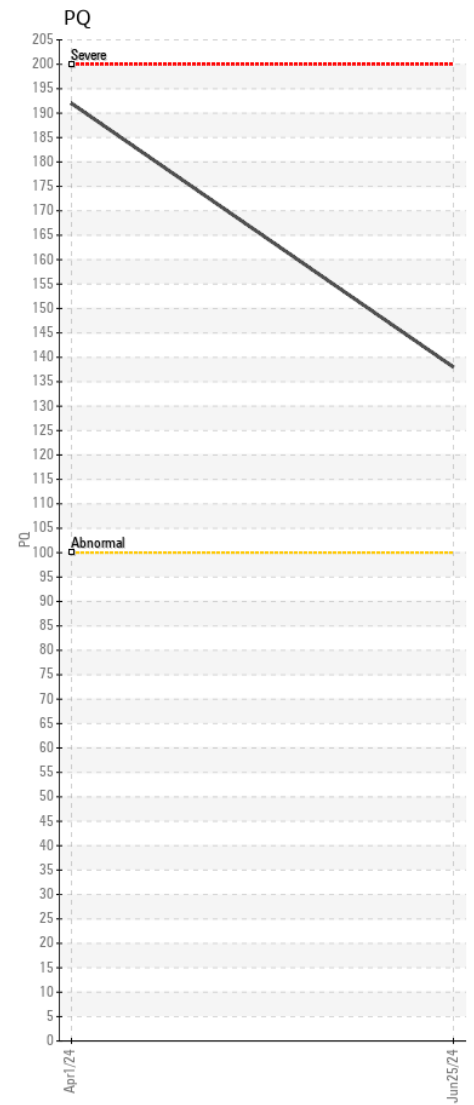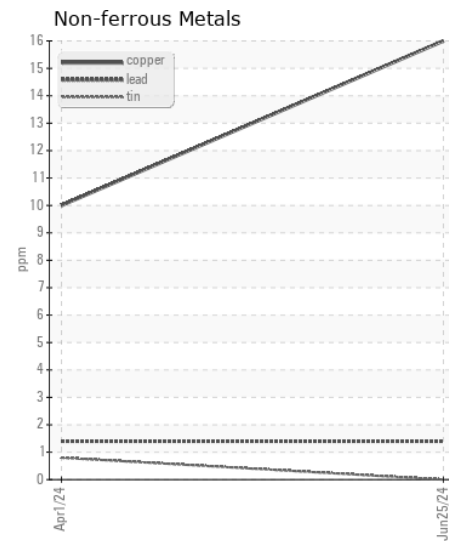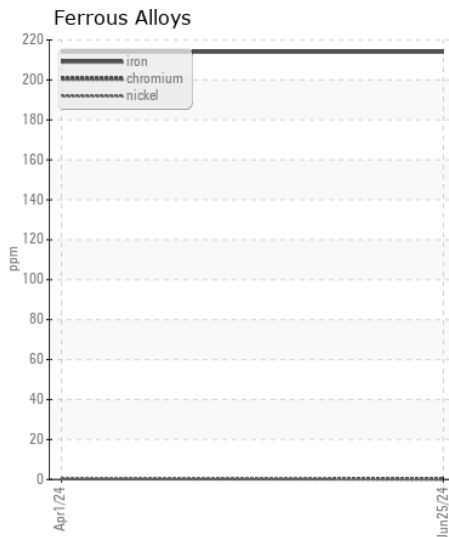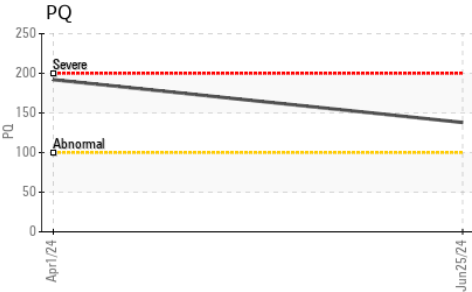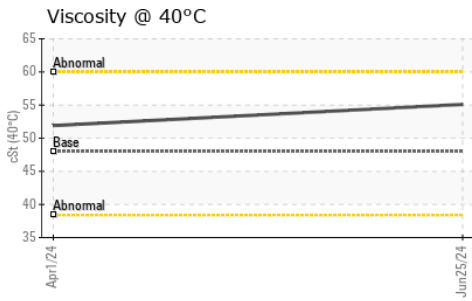

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0213616 **Received** : 26 Jun 2024
Lab Number : 06221517 **Tested** : 27 Jun 2024
Unique Number : 11099714 **Diagnosed** : 28 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)