



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 850L 1T0850LXCNF428355
 Component
Right Outer Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0220760	JR0200978	JR0173761
Sample Date		Client Info		24 Jun 2024	26 Mar 2024	20 Jun 2023
Machine Age	hrs	Client Info		3530	2995	1534
Oil Age	hrs	Client Info		535	1506	510
Filter Age	hrs	Client Info		0	1506	0
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	111	138	203
Iron	ppm	ASTM D5185m	>750	154	427	239
Chromium	ppm	ASTM D5185m	>9	<1	4	1
Nickel	ppm	ASTM D5185m	>10	<1	3	2
Titanium	ppm	ASTM D5185m		<1	2	1
Silver	ppm	ASTM D5185m		0	<1	0
Aluminum	ppm	ASTM D5185m	>40	6	21	13
Lead	ppm	ASTM D5185m	>15	0	<1	0
Copper	ppm	ASTM D5185m	>40	0	1	<1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>75	53	▲ 153	▲ 101
Potassium	ppm	ASTM D5185m	>20	<1	7	4
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	MODER
Debris	scalar	*Visual	NONE	▲ MODER	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<1	0	0
Boron	ppm	ASTM D5185m	6	<1	1	2
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	0	1	3
Manganese	ppm	ASTM D5185m		1	5	2
Magnesium	ppm	ASTM D5185m	145	100	100	108
Calcium	ppm	ASTM D5185m	3570	3394	3498	3747
Phosphorus	ppm	ASTM D5185m	1290	990	1019	1056
Zinc	ppm	ASTM D5185m	1640	1199	1234	1293
Sulfur	ppm	ASTM D5185m		3899	5626	4255
Visc @ 40°C	cSt	ASTM D445	57.0	54.5	53.9	54.6

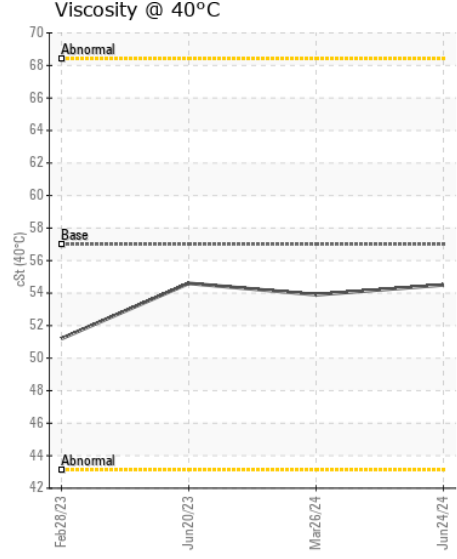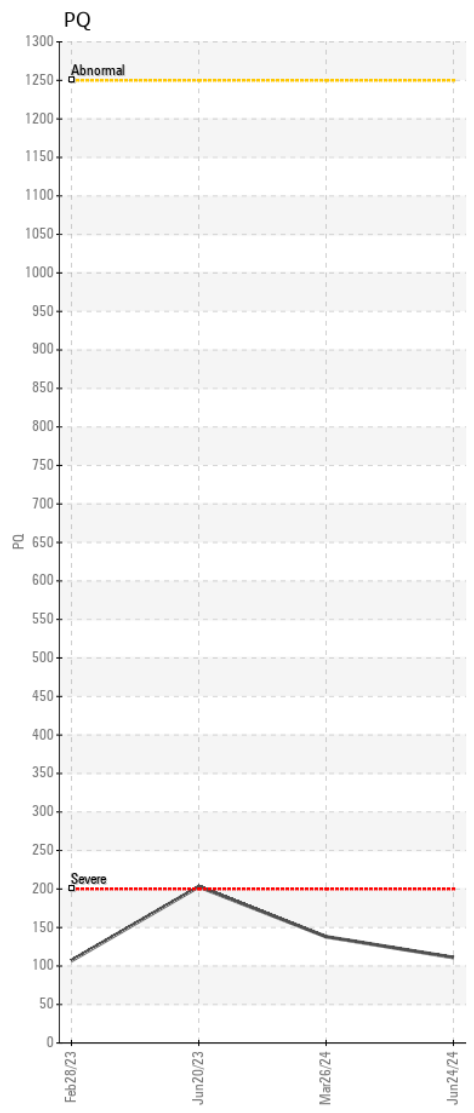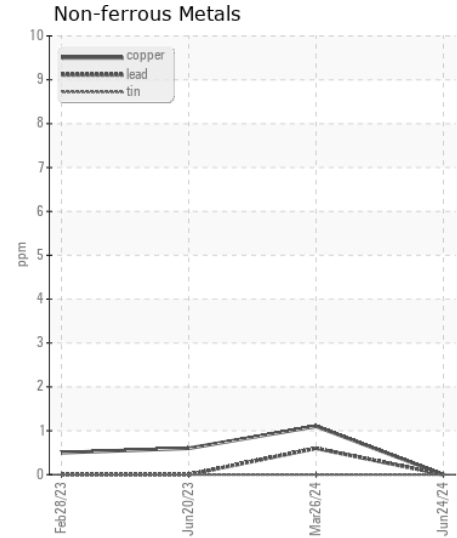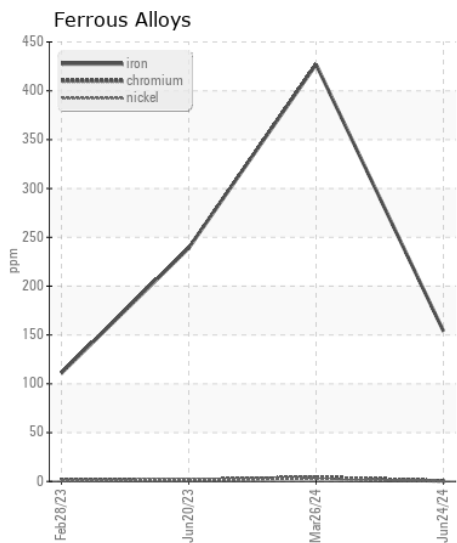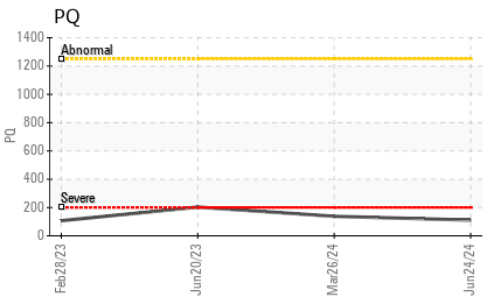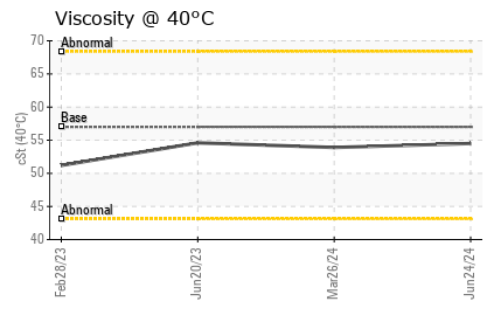

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0220760 **Received** : 26 Jun 2024
Lab Number : 06221523 **Tested** : 27 Jun 2024
Unique Number : 11099720 **Diagnosed** : 28 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - NEW BERN
 3816 MARTIN LUTHER KING BLVD
 NEW BERN, NC
 US 28562
 Contact: NEW BERN SHOP

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

nick.etherdridge@jamesriverequipment.com; canastasio@wearcheckusa.com

T:
F: