



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 700K 1T0700KXHFK361339**  
Component  
**Right Final Drive**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0218908</b>	JR0191379	JR0185207
Sample Date		Client Info		<b>20 Jun 2024</b>	27 Dec 2023	16 Aug 2023
Machine Age	hrs	Client Info		<b>6483</b>	5995	5494
Oil Age	hrs	Client Info		<b>488</b>	1072	571
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Changed	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>104</b>	129	25
Iron	ppm	ASTM D5185m	>750	<b>111</b>	139	33
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>40	<b>4</b>	10	2
Lead	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>MODER</b>	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>32</b>	32	8
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	1
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>1</b>	2	<1
Boron	ppm	ASTM D5185m	6	<b>4</b>	1	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>1</b>	2	<1
Magnesium	ppm	ASTM D5185m	145	<b>101</b>	104	101
Calcium	ppm	ASTM D5185m	3570	<b>3439</b>	3339	3352
Phosphorus	ppm	ASTM D5185m	1290	<b>1020</b>	1016	969
Zinc	ppm	ASTM D5185m	1640	<b>1214</b>	1226	1202
Sulfur	ppm	ASTM D5185m		<b>4494</b>	3323	3964
Visc @ 40°C	cSt	ASTM D445	57.0	<b>52.6</b>	50.1	52.7

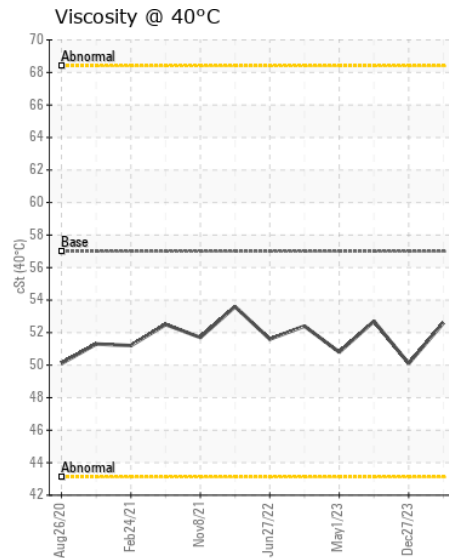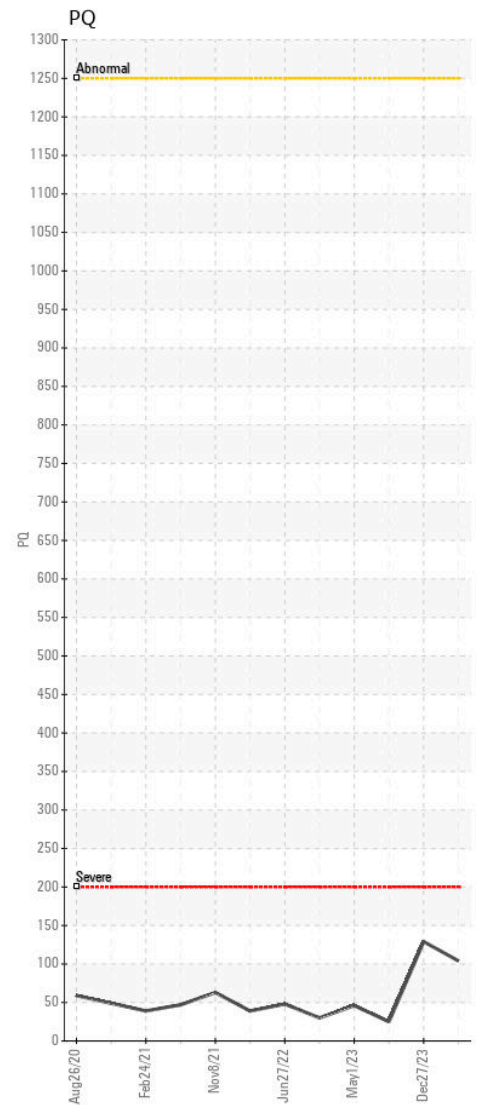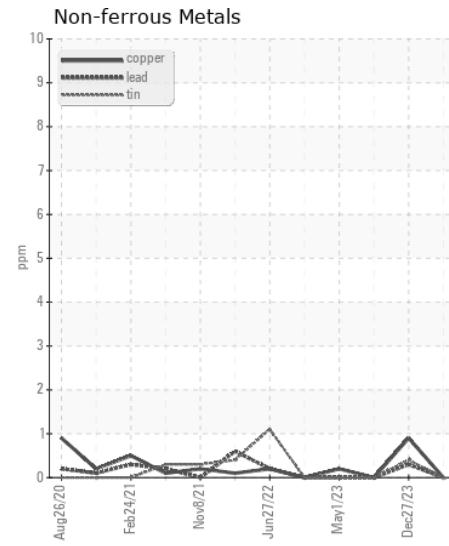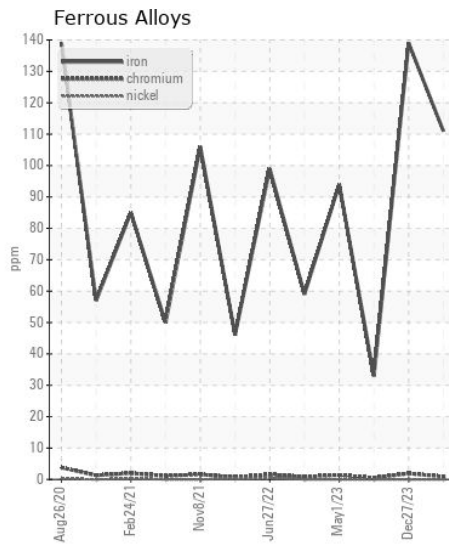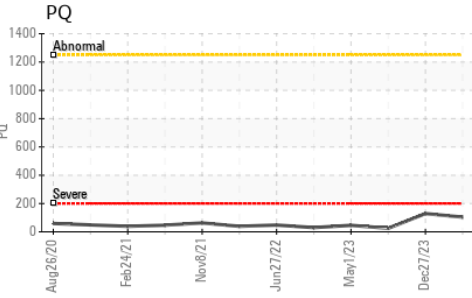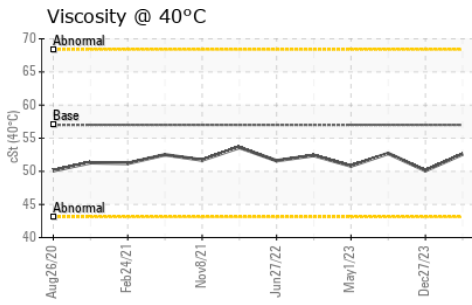

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0218908 **Received** : 26 Jun 2024  
**Lab Number** : 06221527 **Tested** : 27 Jun 2024  
**Unique Number** : 11099724 **Diagnosed** : 27 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**TENNOCA CONSTRUCTION**  
 PO BOX 2379  
 CANDLER, NC  
 US 28715  
 Contact: MARK ROSS  
 mark@tennoca.com  
 T: (828)665-8331  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)