



WEAR	ATTENTION
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 85G 1FF085GXCHJ019123
 Component
Left Final Drive
 Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

We advise that you check all areas where dirt can enter the system. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218920	---	---
Sample Date		Client Info		19 Jun 2024	---	---
Machine Age	hrs	Client Info		4123	---	---
Oil Age	hrs	Client Info		4123	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

PQ		ASTM D8184	>1250	206	---	---
Iron	ppm	ASTM D5185m	>750	2658	---	---
Chromium	ppm	ASTM D5185m	>9	37	---	---
Nickel	ppm	ASTM D5185m	>10	12	---	---
Titanium	ppm	ASTM D5185m		12	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	99	---	---
Lead	ppm	ASTM D5185m	>15	0	---	---
Copper	ppm	ASTM D5185m	>40	5	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION









Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Silicon	ppm	ASTM D5185m	>75	334	---	---
Potassium	ppm	ASTM D5185m	>20	17	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	10	---	---
Boron	ppm	ASTM D5185m		50	---	---
Barium	ppm	ASTM D5185m		73	---	---
Molybdenum	ppm	ASTM D5185m		1	---	---
Manganese	ppm	ASTM D5185m		28	---	---
Magnesium	ppm	ASTM D5185m		12	---	---
Calcium	ppm	ASTM D5185m		66	---	---
Phosphorus	ppm	ASTM D5185m		421	---	---
Zinc	ppm	ASTM D5185m		151	---	---
Sulfur	ppm	ASTM D5185m		23276	---	---
Visc @ 40°C	cSt	ASTM D445		201	---	---

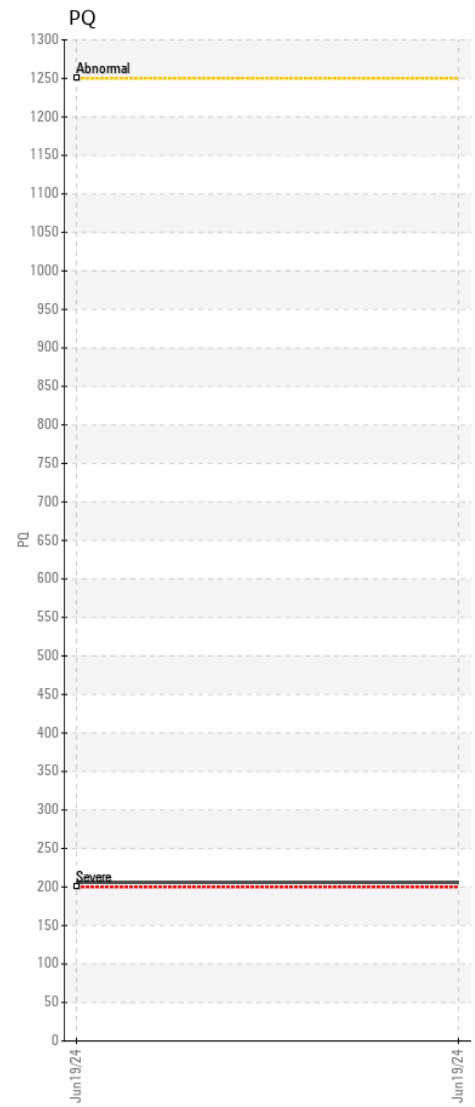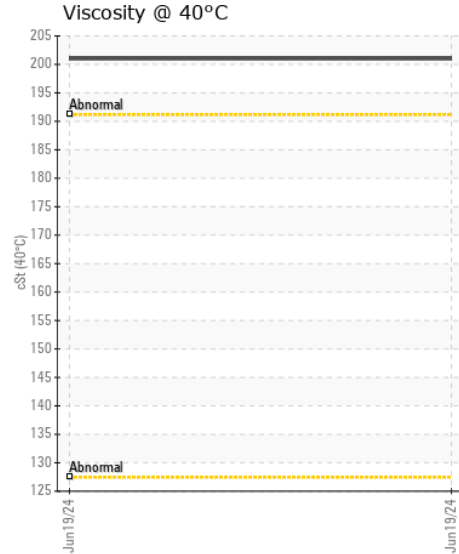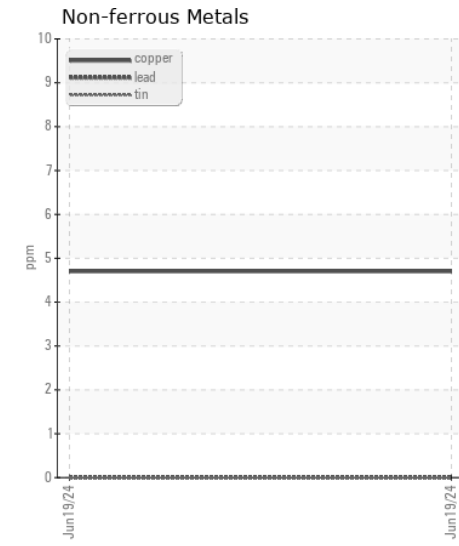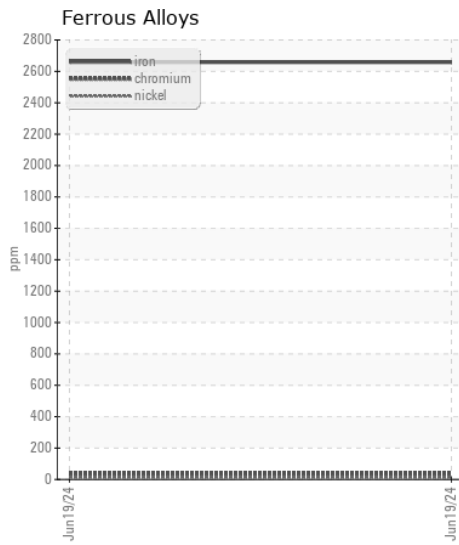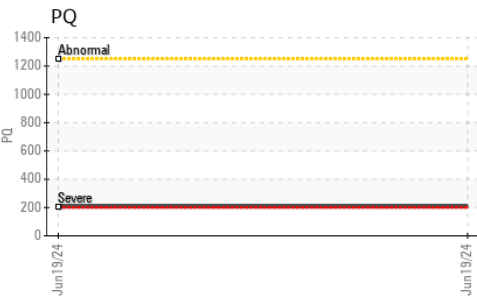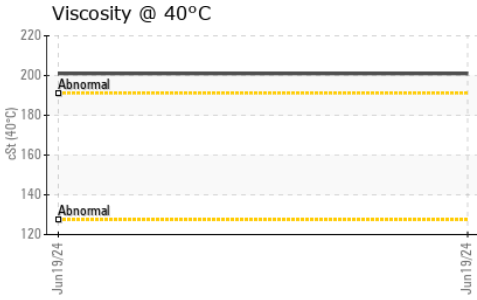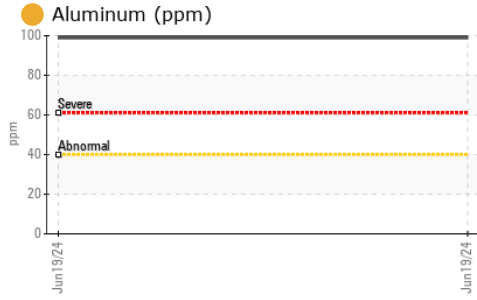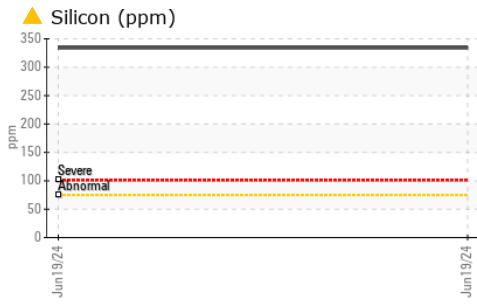

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : JR0218920

Lab Number : 06221536

Unique Number : 11099733

Test Package : CONST (Additional Tests: PQ)

Received : 26 Jun 2024

Tested : 27 Jun 2024

Diagnosed : 28 Jun 2024 - Don Baldrige

JRE - ASHEVILLE

101 BRUCE DRIVE

ASHEVILLE, NC

US 28806

Contact: Randy Warren

randy.warren@jamesriverequipment.com

T: (528)667-0176

F: (828)667-4865

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)