



OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**Store 1 - Cowen [152093]**  
Machine Id  
**JOHN DEERE 624P 1DW624PACMLZ13219**  
Component  
**Rear Axle**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (4 GAL)**

**RECOMMENDATION**

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0049861</b>	LEC0040521	LEC0041070
Sample Date		Client Info		<b>24 Jun 2024</b>	08 Feb 2024	04 Aug 2023
Machine Age	hrs	Client Info		<b>3679</b>	3146	2507
Oil Age	hrs	Client Info		<b>1660</b>	1127	488
Filter Age	hrs	Client Info		<b>533</b>	1127	488
Oil Changed		Client Info		<b>Not Changed</b>	Not Changed	Not Changed
Filter Changed		Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	NORMAL

**WEAR**

Bearing and/or bushing wear is indicated.

PQ		ASTM D8184		<b>15</b>	12	16
Iron	ppm	ASTM D5185m	>750	<b>49</b>	43	34
Chromium	ppm	ASTM D5185m	>11	<b>0</b>	0	<1
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>21	<b>&lt;1</b>	0	<1
Lead	ppm	ASTM D5185m	>49	<b>▲ 64</b>	▲ 55	34
Copper	ppm	ASTM D5185m	>101	<b>▲ 143</b>	▲ 113	53
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<b>4</b>	6	5
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>4</b>	4	3
Boron	ppm	ASTM D5185m	6	<b>3</b>	2	<1
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>2</b>	5	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	145	<b>90</b>	100	98
Calcium	ppm	ASTM D5185m	3570	<b>3175</b>	3331	3286
Phosphorus	ppm	ASTM D5185m	1290	<b>976</b>	989	978
Zinc	ppm	ASTM D5185m	1640	<b>1132</b>	1284	1194
Sulfur	ppm	ASTM D5185m		<b>4153</b>	3425	4229
Visc @ 40°C	cSt	ASTM D445	57.0	<b>52.4</b>	53.0	53.8

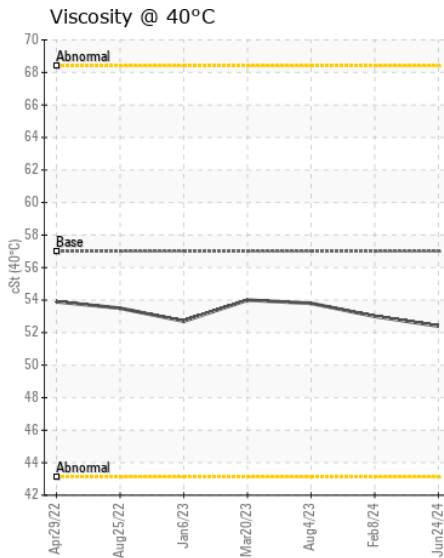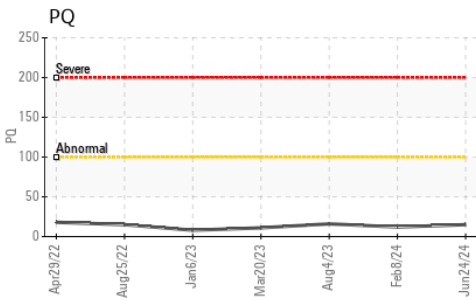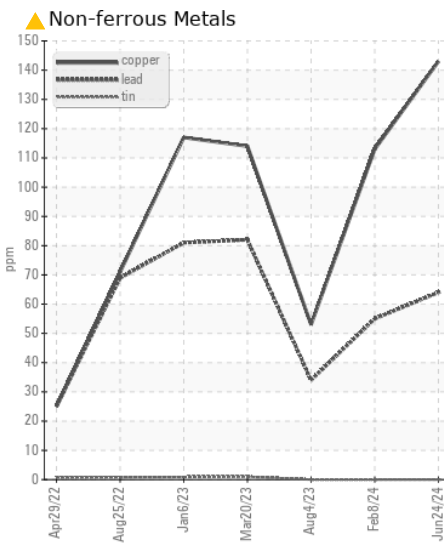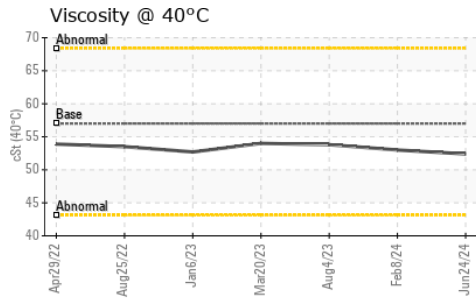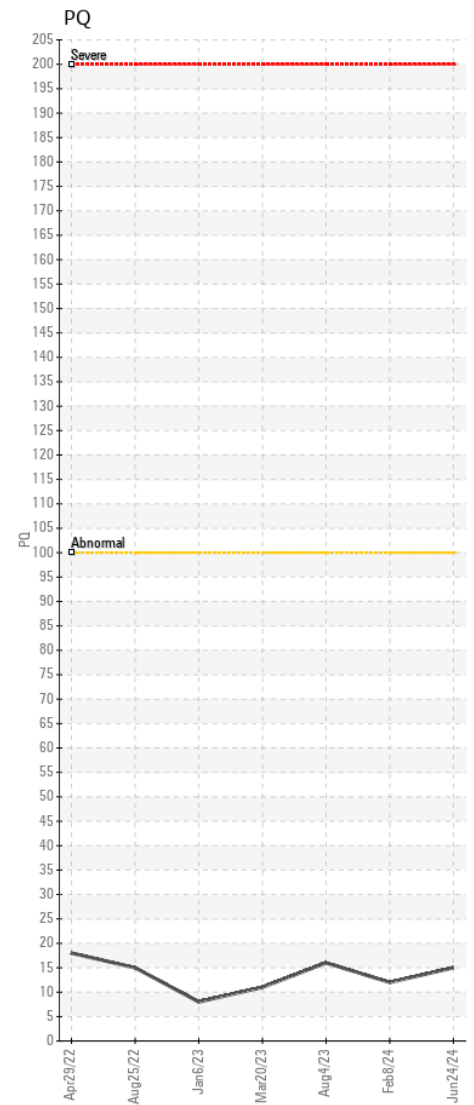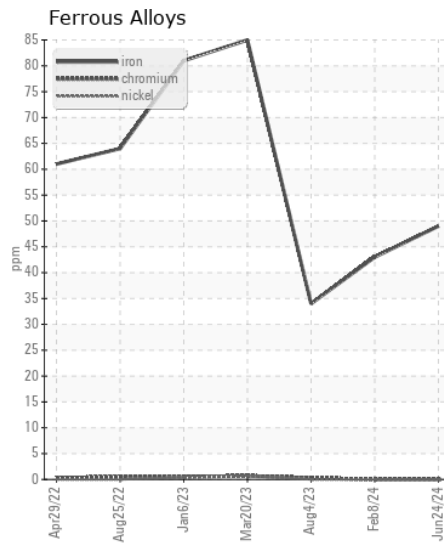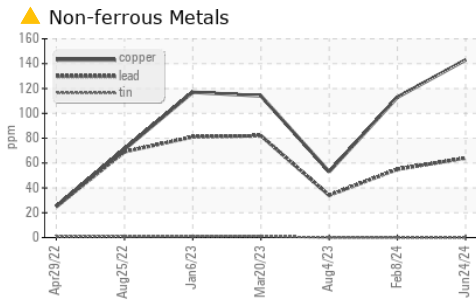

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0049861 **Received** : 26 Jun 2024  
**Lab Number** : 06221543 **Tested** : 27 Jun 2024  
**Unique Number** : 11099740 **Diagnosed** : 28 Jun 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
 F: (740)373-5570