



VOLVO PENTA

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

PHANTOM OF ART

Machine Id

VOLVO PENTA 3950008059

Component

Port IPS

Fluid

VOLVO PENTA GL-5 SAE 75W90 (6 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA061960	---	---
Sample Date		Client Info		25 Jun 2024	---	---
Machine Age	hrs	Client Info		240	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		22	---	---
Iron	ppm	ASTM D5185m	>275	31	---	---
Chromium	ppm	ASTM D5185m	>4	0	---	---
Nickel	ppm	ASTM D5185m	>4	0	---	---
Titanium	ppm	ASTM D5185m	>3	0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>4	0	---	---
Copper	ppm	ASTM D5185m	>30	7	---	---
Tin	ppm	ASTM D5185m	>3	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>35	7	---	---
Potassium	ppm	ASTM D5185m	>20	11	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	---	---
Boron	ppm	ASTM D5185m		513	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		4	---	---
Magnesium	ppm	ASTM D5185m		922	---	---
Calcium	ppm	ASTM D5185m		60	---	---
Phosphorus	ppm	ASTM D5185m		1599	---	---
Zinc	ppm	ASTM D5185m		13	---	---
Sulfur	ppm	ASTM D5185m		26167	---	---
Visc @ 40°C	cSt	ASTM D445	90.0	95.3	---	---

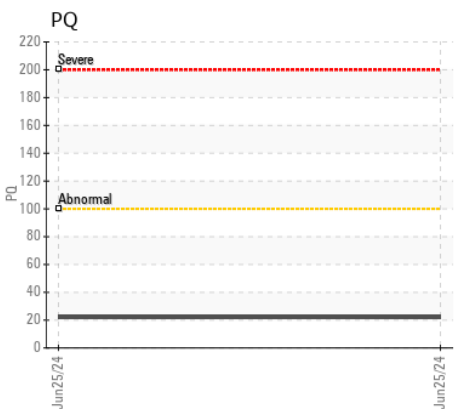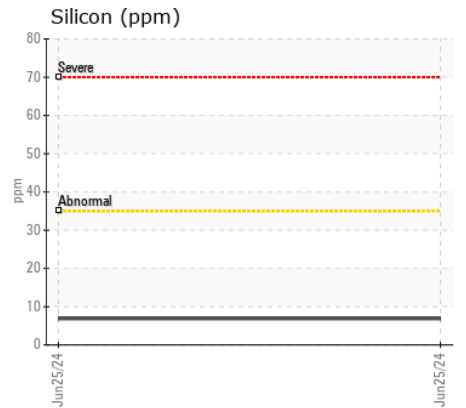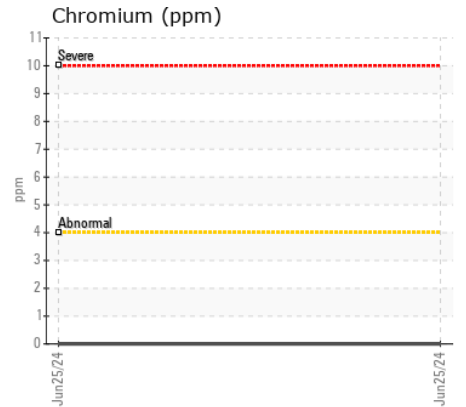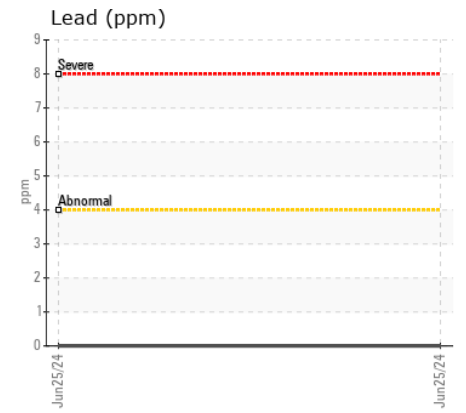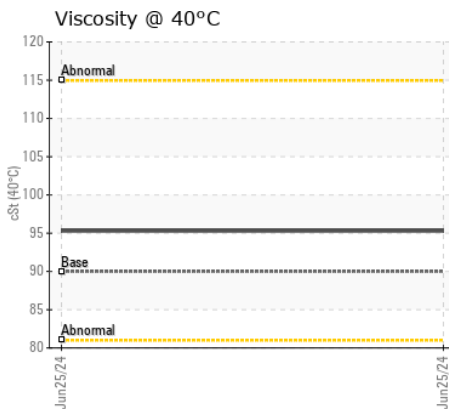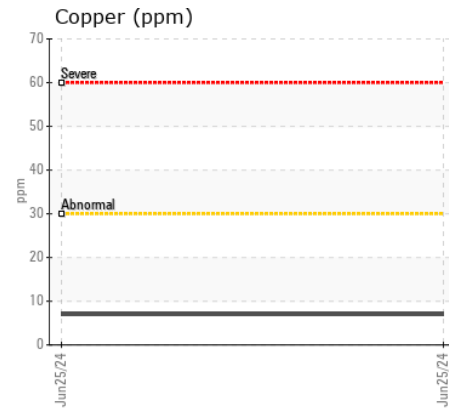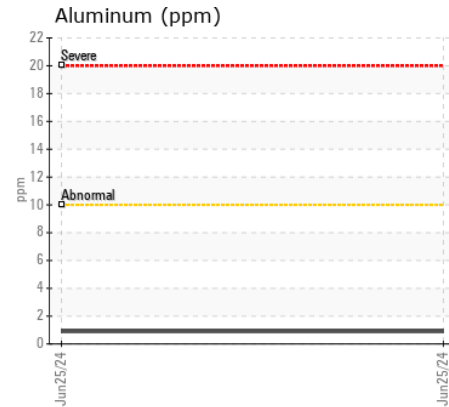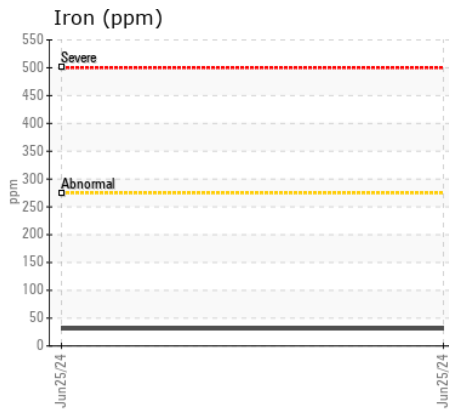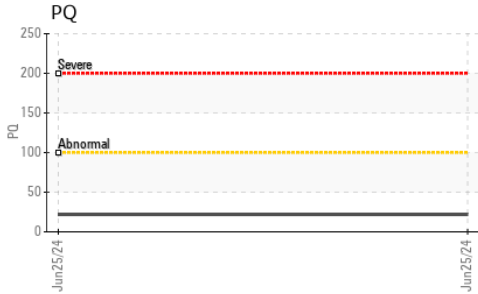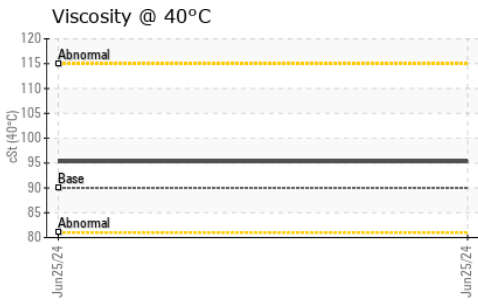

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA061960 **Received** : 26 Jun 2024
Lab Number : 06221568 **Tested** : 27 Jun 2024
Unique Number : 11099765 **Diagnosed** : 27 Jun 2024 - Doug Bogart
Test Package : MOB 1 (Additional Tests: PQ)

Marine International Diesels Inc.
 3600 HACIENDA BLVD UNIT G
 DAVIE, FL
 US 33314
 Contact: ASHANTI BURKE
 aburke@midflorida.com
 T: (954)761-1086
 F: (954)761-1186

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)