



VOLVO

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[2014]
 Machine Id
VOLVO L120H 632190
 Component
Front Axle
 Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP434494	VCP314542	---
Sample Date		Client Info		20 Jun 2024	24 Jun 2021	---
Machine Age	hrs	Client Info		9575	4975	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				ABNORMAL	NORMAL	---

WEAR

Gear wear is indicated.

Iron	ppm	ASTM D5185m	>500	▲ 880	307	---
Chromium	ppm	ASTM D5185m	>20	14	4	---
Nickel	ppm	ASTM D5185m	>10	2	1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	<1	0	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>120	2	2	---
Tin	ppm	ASTM D5185m	>20	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>50	19	11	---
Potassium	ppm	ASTM D5185m	>20	0	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		3	2	---
Boron	ppm	ASTM D5185m		115	126	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		7	6	---
Manganese	ppm	ASTM D5185m		16	7	---
Magnesium	ppm	ASTM D5185m		12	14	---
Calcium	ppm	ASTM D5185m		3884	3763	---
Phosphorus	ppm	ASTM D5185m		1289	1340	---
Zinc	ppm	ASTM D5185m		1491	1445	---
Sulfur	ppm	ASTM D5185m		5002	3521	---
Visc @ 40°C	cSt	ASTM D445	55	40.2	40.32	---


▲ Ferrous Alloys

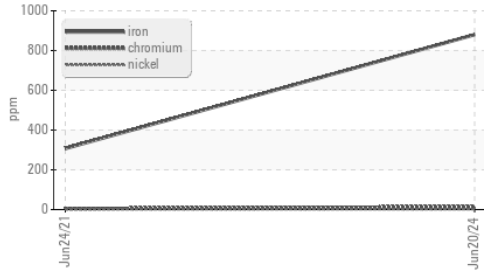


Viscosity @ 40°C




▲ Iron (ppm)

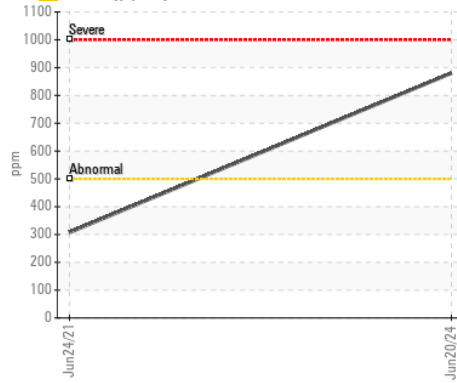


Aluminum (ppm)

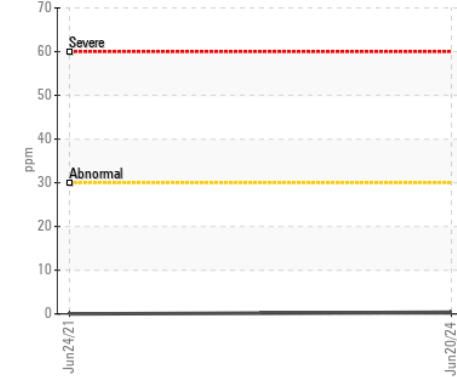


Copper (ppm)

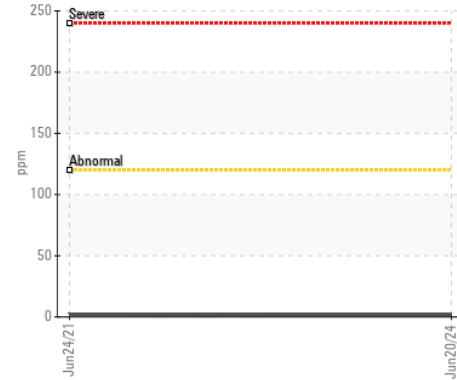


Viscosity @ 40°C

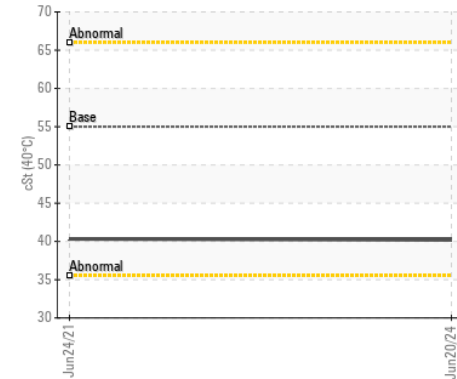


Lead (ppm)

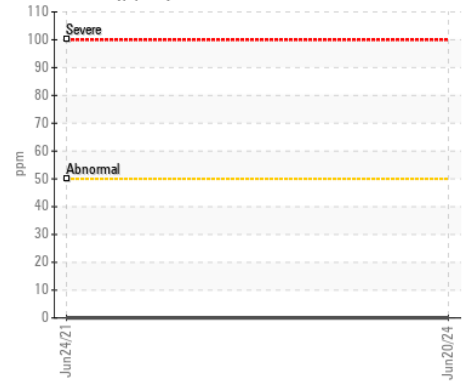


Chromium (ppm)

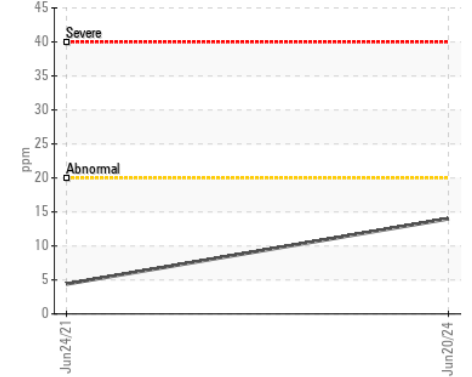

Silicon (ppm)

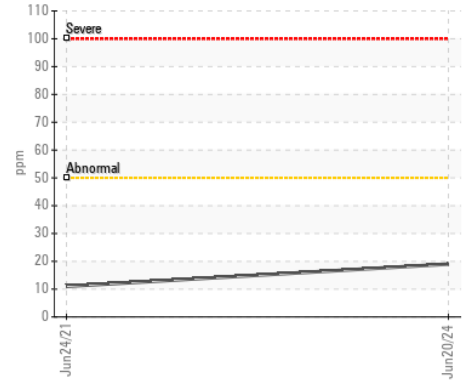

Additives

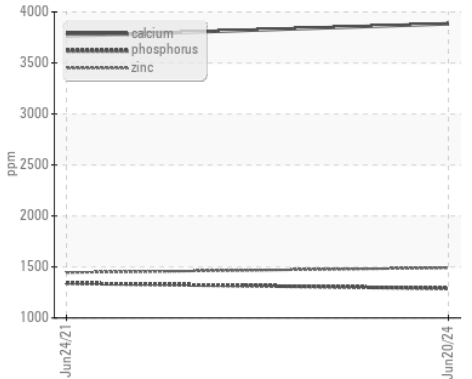

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP434494

Lab Number : 06221583

Unique Number : 11099780

Test Package : MOB 1

Received : 26 Jun 2024

Tested : 27 Jun 2024

Diagnosed : 28 Jun 2024 - Angela Borella

LEONARDS CONTRACTING

30850 STEPHENSON HWY

MADISON HEIGHTS, MI

US 48071

Contact: LARRY SCHRADER

larry.schrader@sdevelop.com

T: (810)499-1953

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)