



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[RSO-038391]
 Machine Id
HITACHI 060320
 Component
Rear Right Final Drive
 Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP451359	VCP447621	---
Sample Date		Client Info		20 Jun 2024	10 May 2024	---
Machine Age	hrs	Client Info		530	270	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		Not Changed	Not Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	48	89	---
Chromium	ppm	ASTM D5185m	>10	1	4	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	0	<1	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	<1	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	MODER	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	13	22	---
Potassium	ppm	ASTM D5185m	>20	<1	4	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	2	---
Boron	ppm	ASTM D5185m	111	129	111	---
Barium	ppm	ASTM D5185m	0.0	2	2	---
Molybdenum	ppm	ASTM D5185m	0.9	4	0	---
Manganese	ppm	ASTM D5185m	0.0	2	6	---
Magnesium	ppm	ASTM D5185m	39	27	0	---
Calcium	ppm	ASTM D5185m	93	192	13	---
Phosphorus	ppm	ASTM D5185m	920	855	554	---
Zinc	ppm	ASTM D5185m	104	112	6	---
Sulfur	ppm	ASTM D5185m	20179	20645	18310	---
Visc @ 40°C	cSt	ASTM D445	333	262	188	---

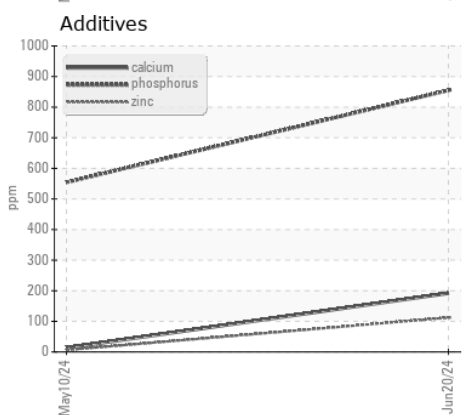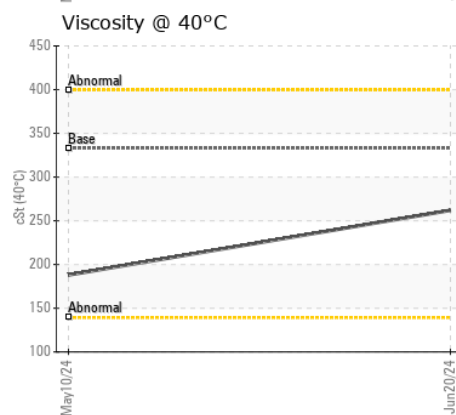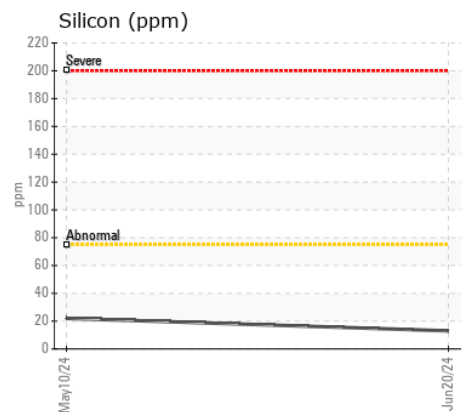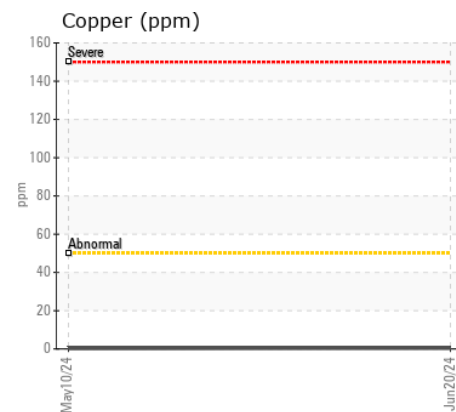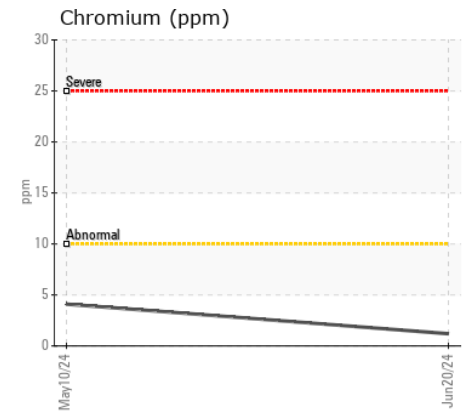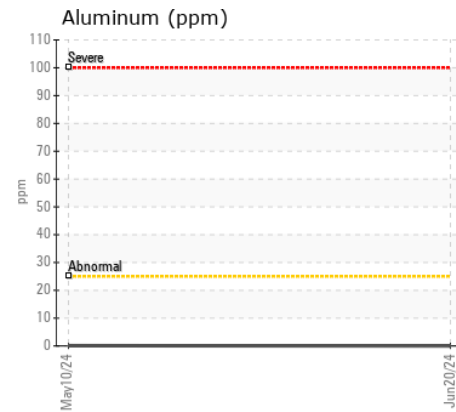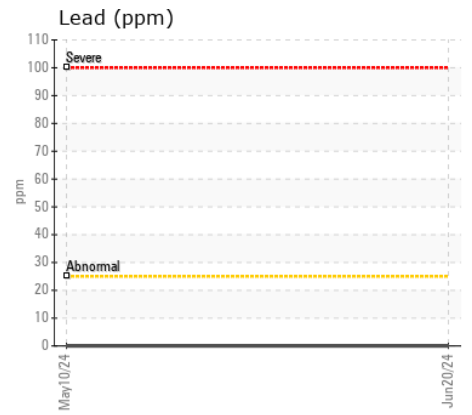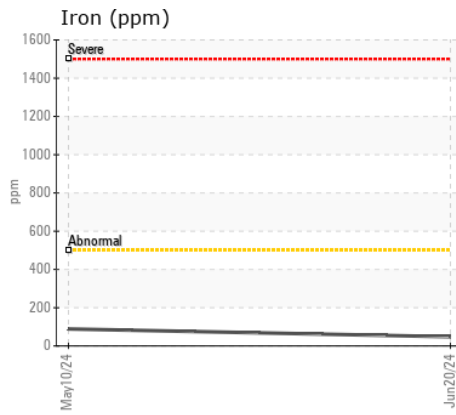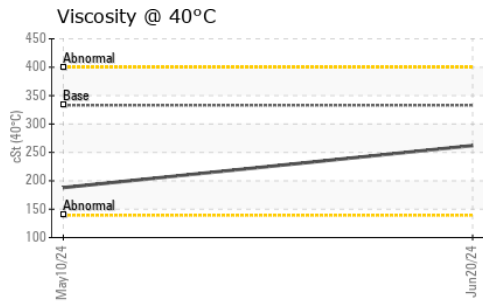

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : VCP451359

Lab Number : 06221599

Unique Number : 11099796

Test Package : MOB 1

Received : 26 Jun 2024

Tested : 27 Jun 2024

Diagnosed : 28 Jun 2024 - Angela Borella

SAIIA CONSTRUCTION LLC

4400 LEWISBURG RD

BIRMINGHAM, AL

US 35207

Contact: STEPHANI BRITTON

sbritton@saiia.com;doug.bogart@wearcheck.com

T: (205)943-2268

F: (205)943-2269

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)