



# VOLVO

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Area  
**[HERC RENTAL]**  
 Machine Id  
**VOLVO A30G 753485**  
 Component  
**Front Axle**  
 Fluid  
**VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP451239	---	---
Sample Date		Client Info		20 Jun 2024	---	---
Machine Age	hrs	Client Info		1123	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ATTENTION	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	195	---	---
Chromium	ppm	ASTM D5185m	>20	4	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	0	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>150	27	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	4	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

### FLUID CONDITION

The oil viscosity is lower than normal. This plus the additive levels indicates the addition of a different brand, or type of oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	111	224	---	---
Barium	ppm	ASTM D5185m	0.0	6	---	---
Molybdenum	ppm	ASTM D5185m	0.9	7	---	---
Manganese	ppm	ASTM D5185m	0.0	6	---	---
Magnesium	ppm	ASTM D5185m	39	3	---	---
Calcium	ppm	ASTM D5185m	93	1067	---	---
Phosphorus	ppm	ASTM D5185m	920	1354	---	---
Zinc	ppm	ASTM D5185m	104	429	---	---
Sulfur	ppm	ASTM D5185m	20179	21709	---	---
Visc @ 40°C	cSt	ASTM D445	333	85.3	---	---

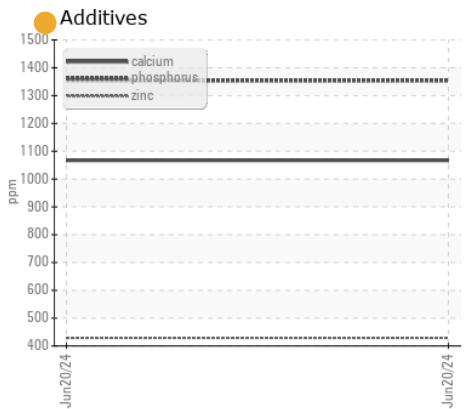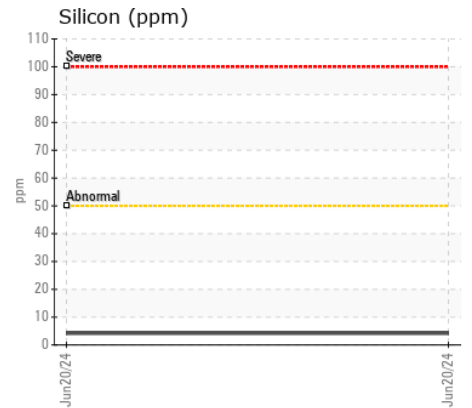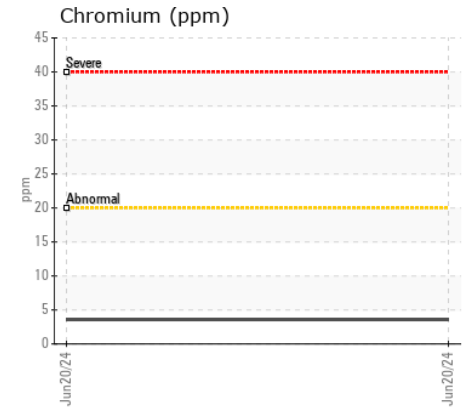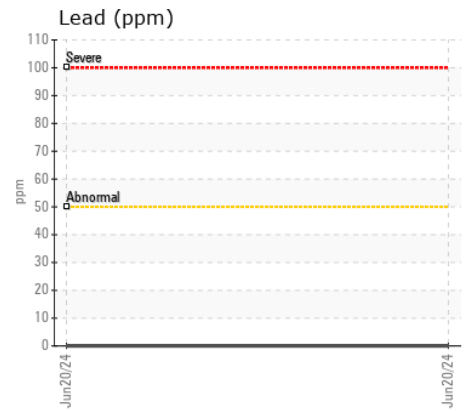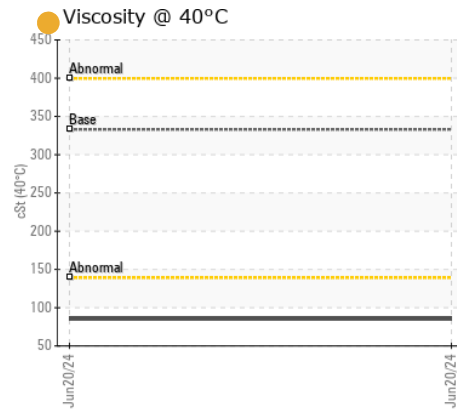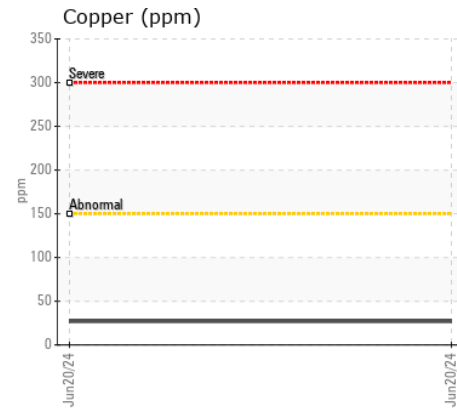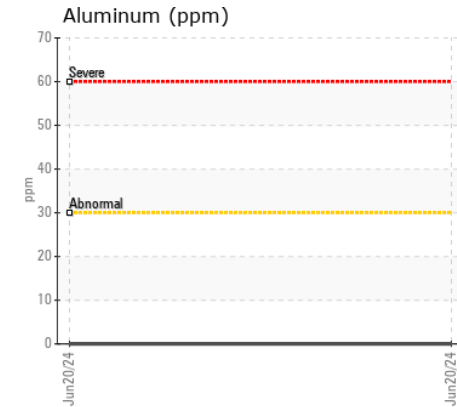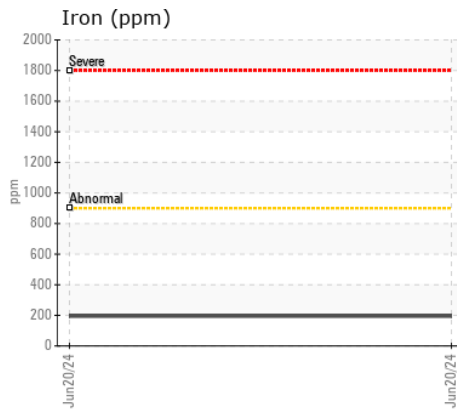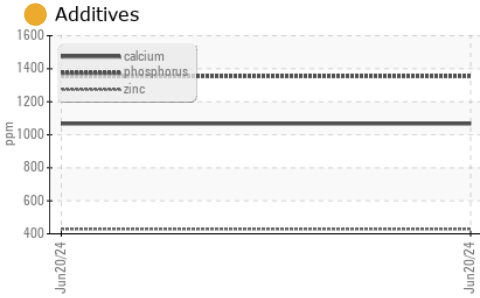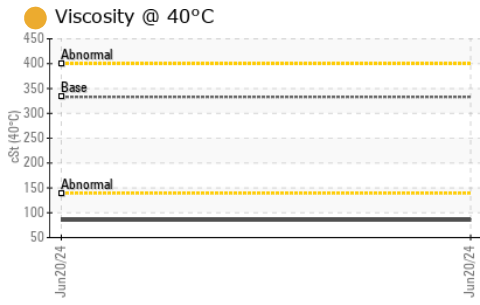

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP451239  
**Lab Number** : 06221630  
**Unique Number** : 11099827  
**Test Package** : MOB 1

**Received** : 26 Jun 2024  
**Tested** : 27 Jun 2024  
**Diagnosed** : 28 Jun 2024 - Don Baldrige

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619  
 Contact: KENNY HANEY  
 khaney@flaglerce.com  
 T: (813)630-0077  
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)