



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[TUCKER PAVING]
 Machine Id
VOLVO A25G 752438
 Component
Brake Cooling System
 Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP444704	VCP382856	---
Sample Date		Client Info		18 Jun 2024	22 Feb 2023	---
Machine Age	hrs	Client Info		3330	1047	---
Oil Age	hrs	Client Info		0	1047	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>50	8	11	---
Chromium	ppm	ASTM D5185m	>20	0	0	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	0	2	---
Lead	ppm	ASTM D5185m	>50	<1	<1	---
Copper	ppm	ASTM D5185m	>200	138	141	---
Tin	ppm	ASTM D5185m	>20	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	11	15	---
Potassium	ppm	ASTM D5185m	>20	1	7	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	6	---
Boron	ppm	ASTM D5185m		80	117	---
Barium	ppm	ASTM D5185m		1	4	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		7	6	---
Calcium	ppm	ASTM D5185m		2485	3469	---
Phosphorus	ppm	ASTM D5185m		930	1080	---
Zinc	ppm	ASTM D5185m		1106	1315	---
Sulfur	ppm	ASTM D5185m		3900	4859	---
Visc @ 40°C	cSt	ASTM D445	55	44.9	42.6	---

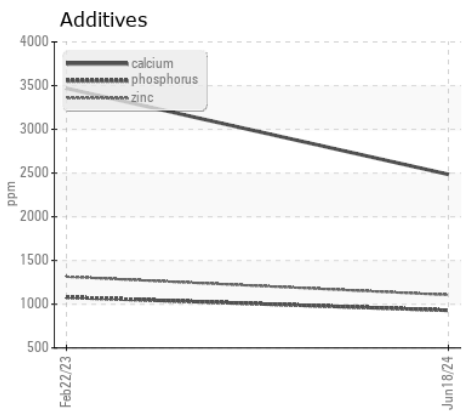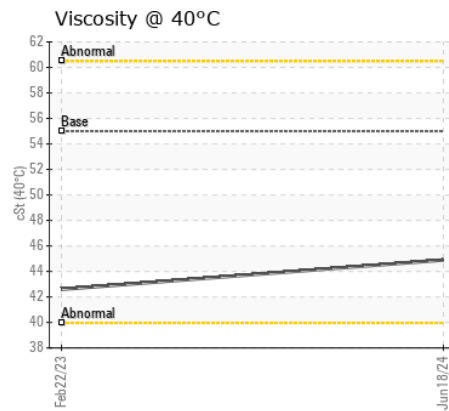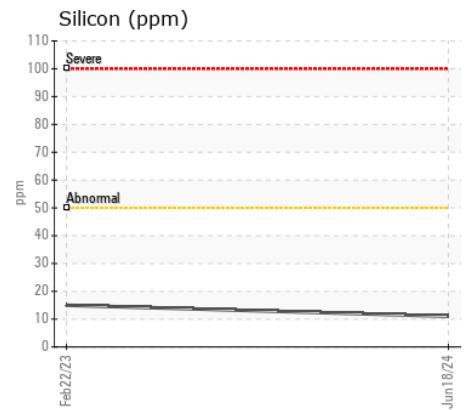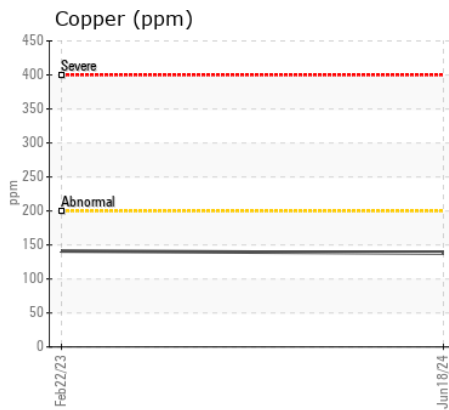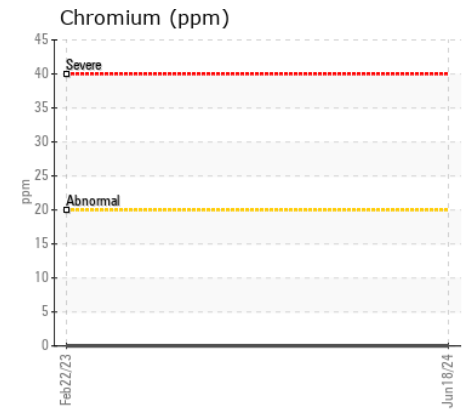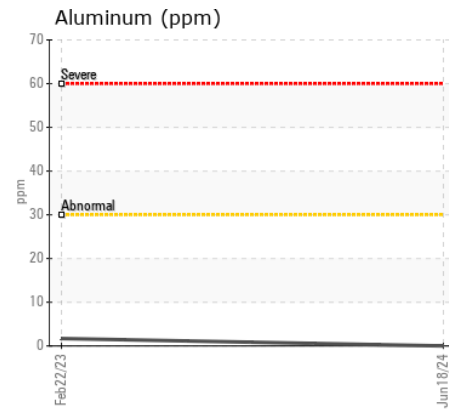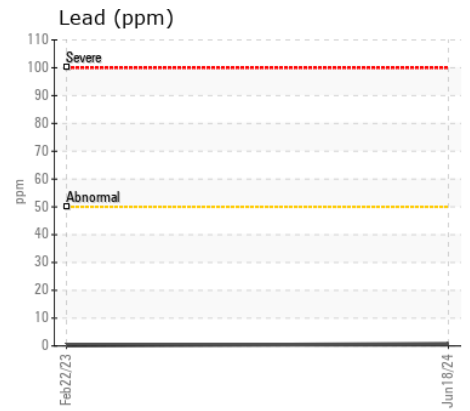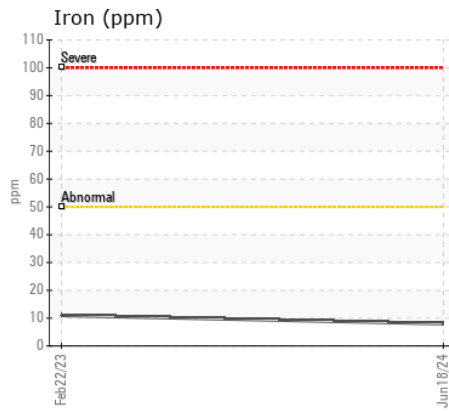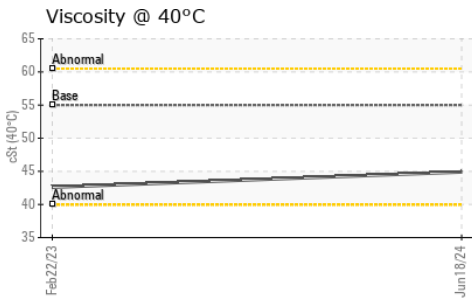

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP444704
Lab Number : 06221635
Unique Number : 11099832
Test Package : MOB 1

Received : 26 Jun 2024
Tested : 27 Jun 2024
Diagnosed : 28 Jun 2024 - Don Baldrige

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: KENNY HANEY
 khaney@flaglerce.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)