



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L150H 5363
Component
Rear Axle
Fluid
MOBIL MOBILFLUID 424 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0001308	ML0000119	ML0000157
Sample Date		Client Info		12 Jun 2024	10 Apr 2024	13 Feb 2024
Machine Age	hrs	Client Info		10228	9968	9727
Oil Age	hrs	Client Info		250	1957	1716
Filter Age	hrs	Client Info		250	1957	1716
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	10	237	191
Chromium	ppm	ASTM D5185m	>20	0	3	2
Nickel	ppm	ASTM D5185m	>10	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	<1	2	<1
Lead	ppm	ASTM D5185m	>50	0	<1	<1
Copper	ppm	ASTM D5185m	>120	<1	2	2
Tin	ppm	ASTM D5185m	>20	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the component.

Silicon	ppm	ASTM D5185m	>50	9	12	10
Potassium	ppm	ASTM D5185m	>20	0	2	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	2
Boron	ppm	ASTM D5185m		107	101	91
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		3	10	8
Manganese	ppm	ASTM D5185m		<1	2	2
Magnesium	ppm	ASTM D5185m		24	34	30
Calcium	ppm	ASTM D5185m		3512	3729	3189
Phosphorus	ppm	ASTM D5185m		1111	1301	1141
Zinc	ppm	ASTM D5185m		1374	1486	1287
Sulfur	ppm	ASTM D5185m		9151	5113	3936
Visc @ 40°C	cSt	ASTM D445	55	56.5	45.2	45.4

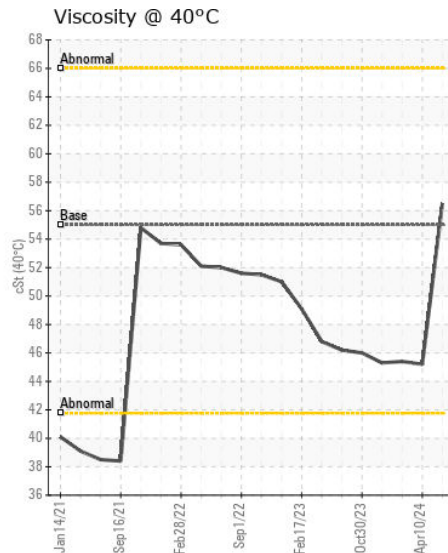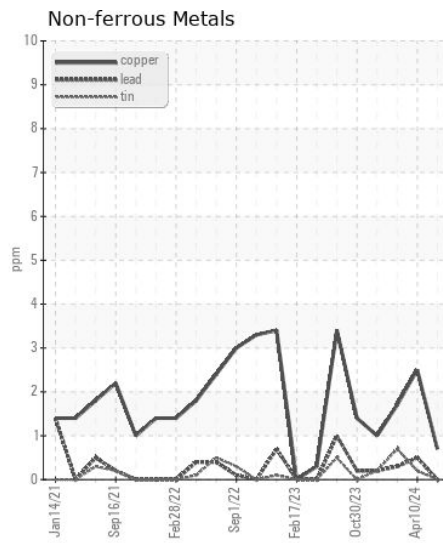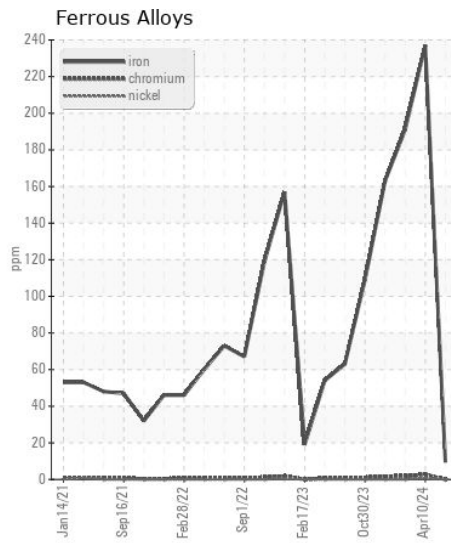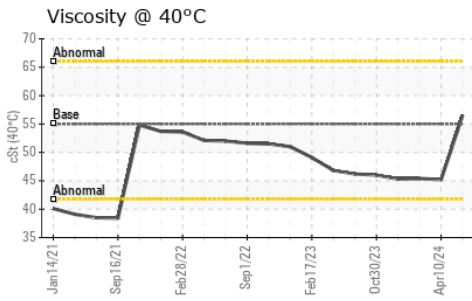

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001308
Lab Number : 06221650
Unique Number : 11099847
Test Package : CONST

Received : 26 Jun 2024
Tested : 27 Jun 2024
Diagnosed : 28 Jun 2024 - Don Baldrige

MARYLAND ENVIRONMENTAL SERVICES
 21210 MARTINSBURG RD
 DICKERSON, MD
 US 20842
 Contact: ALAN PARRISH
 aparr@menv.com
 T: (301)428-8185
 F: (301)428-8311

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)