



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

Ascendum Machinery/500 Hour CSA

Machine Id

VOLVO EC350E 2161 (S/N 314232)

Component

Rear Left Final Drive

Fluid

VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0005080	VCP421827	---
Sample Date		Client Info		21 Jun 2024	03 Aug 2023	---
Machine Age	hrs	Client Info		3964	2920	---
Oil Age	hrs	Client Info		1044	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	Not Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>1200	212	323	---
Chromium	ppm	ASTM D5185m	>10	7	9	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>100	8	10	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>200	<1	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	32	59	---
Potassium	ppm	ASTM D5185m	>20	<1	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	<1	---
Boron	ppm	ASTM D5185m	111	169	193	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.9	<1	<1	---
Manganese	ppm	ASTM D5185m	0.0	3	4	---
Magnesium	ppm	ASTM D5185m	39	0	1	---
Calcium	ppm	ASTM D5185m	93	35	9	---
Phosphorus	ppm	ASTM D5185m	920	1002	1045	---
Zinc	ppm	ASTM D5185m	104	15	0	---
Sulfur	ppm	ASTM D5185m	20179	31680	25056	---
Visc @ 40°C	cSt	ASTM D445	333	312	206	---

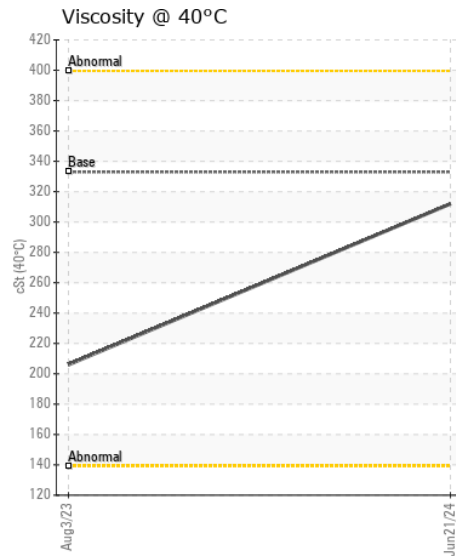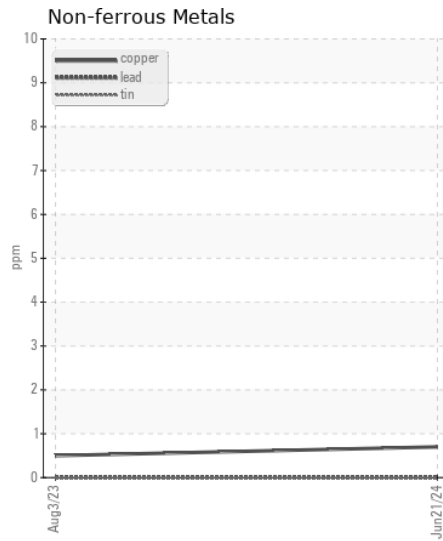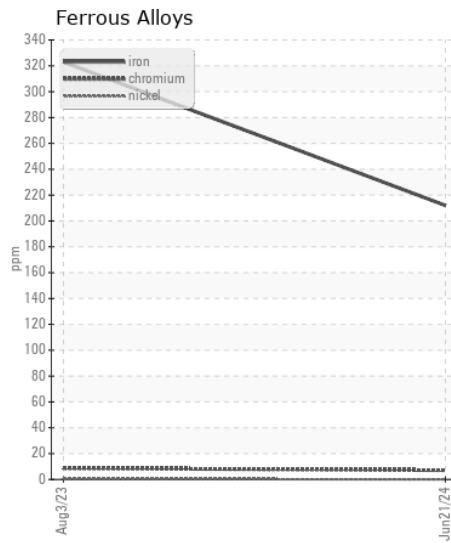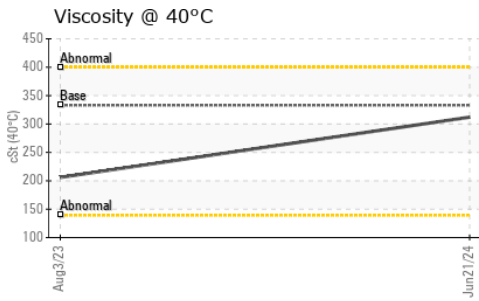

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0005080
Lab Number : 06221667
Unique Number : 11099864
Test Package : CONST

Received : 26 Jun 2024
Tested : 27 Jun 2024
Diagnosed : 28 Jun 2024 - Don Baldrige

TRIANGLE GRADING AND PAVING INC
 1521 Huffman Mill Rd
 BURLINGTON, NC
 US 27216
 Contact: ADAM CORBETT
 wacorbett@trianglegradingpaving.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: (336)584-0145