



ASCENDUM

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
VOLVO EC210C 110262
Component
Swing Drive
Fluid
GEAR OIL SAE 80 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0003317	---	---
Sample Date		Client Info		25 Jun 2024	---	---
Machine Age	hrs	Client Info		9000	---	---
Oil Age	hrs	Client Info		9000	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

Gear wear is indicated. Bearing and/or bushing wear is indicated.

Iron	ppm	ASTM D5185m	>1200	▲ 2341	---	---
Chromium	ppm	ASTM D5185m	>10	▲ 18	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	10	---	---
Lead	ppm	ASTM D5185m	>50	<1	---	---
Copper	ppm	ASTM D5185m	>50	▲ 64	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>100	67	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Water		WC Method	>0.25	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.25	NEG	---	---

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		1	---	---
Boron	ppm	ASTM D5185m	400	143	---	---
Barium	ppm	ASTM D5185m	200	0	---	---
Molybdenum	ppm	ASTM D5185m	12	4	---	---
Manganese	ppm	ASTM D5185m		16	---	---
Magnesium	ppm	ASTM D5185m	12	31	---	---
Calcium	ppm	ASTM D5185m	150	35	---	---
Phosphorus	ppm	ASTM D5185m	1650	2083	---	---
Zinc	ppm	ASTM D5185m	125	91	---	---
Sulfur	ppm	ASTM D5185m	22500	29919	---	---
Visc @ 40°C	cSt	ASTM D445	74	64.8	---	---


▲ Non-ferrous Metals

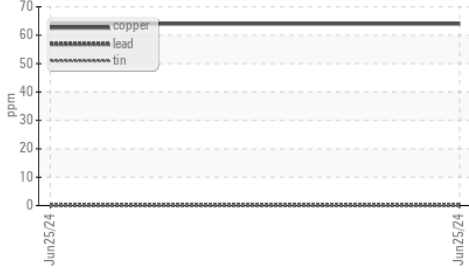


▲ Ferrous Alloys

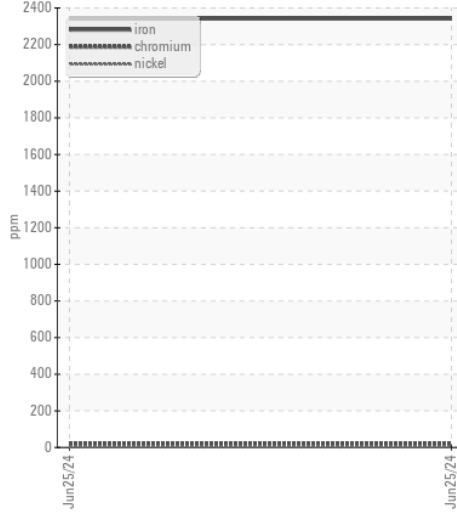


▲ Ferrous Alloys

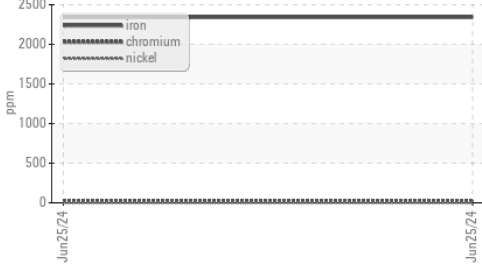


▲ Non-ferrous Metals

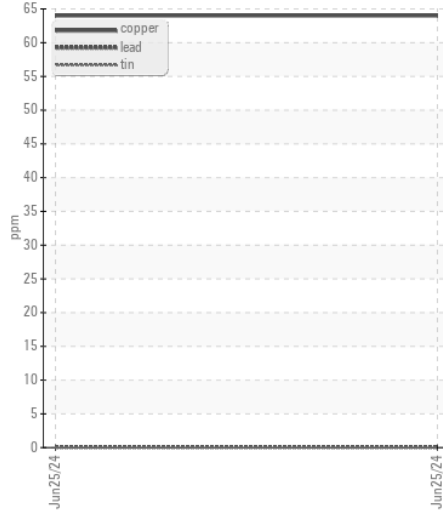

Viscosity @ 40°C

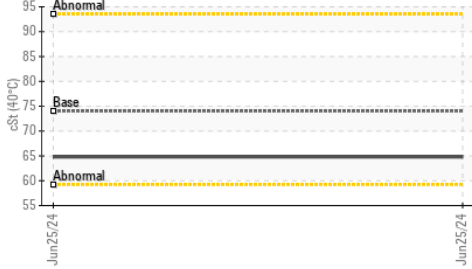

Viscosity @ 40°C

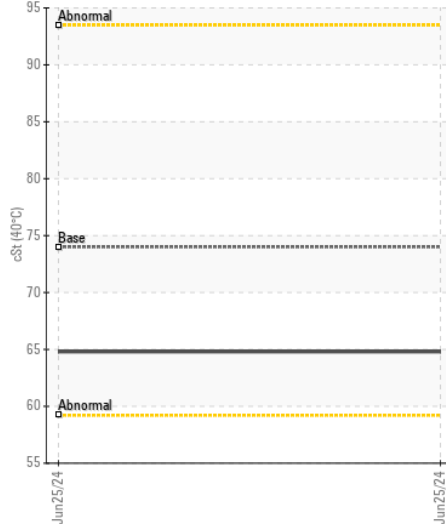

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0003317
Lab Number : 06221681
Unique Number : 11099878
Test Package : CONST

Received : 26 Jun 2024
Tested : 27 Jun 2024
Diagnosed : 28 Jun 2024 - Don Baldrige

160 - ASCENDUM MACHINERY INC - MILLS RIVER
 215 FANNING FIELDS RD
 MILLS RIVER, NC
 US 28759

Contact: BRANDON DRAKE
 brandon.drake@ascendummachinery.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: 8(286)687-0620
 F: (828)687-0622