



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO A30G 742123
Component
Rear Axle
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0003145	VCP345634	---
Sample Date		Client Info		24 Jun 2024	04 Mar 2022	---
Machine Age	hrs	Client Info		5000	3566	---
Oil Age	hrs	Client Info		5000	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	N/A	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	127	327	---
Chromium	ppm	ASTM D5185m	>20	2	7	---
Nickel	ppm	ASTM D5185m	>10	<1	4	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	1	<1	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	4	34	---
Tin	ppm	ASTM D5185m	>20	0	2	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	11	4	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	VLITE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	4	---
Boron	ppm	ASTM D5185m	111	182	183	---
Barium	ppm	ASTM D5185m	0.0	0	0	---
Molybdenum	ppm	ASTM D5185m	0.9	0	4	---
Manganese	ppm	ASTM D5185m	0.0	2	17	---
Magnesium	ppm	ASTM D5185m	39	0	<1	---
Calcium	ppm	ASTM D5185m	93	56	42	---
Phosphorus	ppm	ASTM D5185m	920	1092	1401	---
Zinc	ppm	ASTM D5185m	104	34	9	---
Sulfur	ppm	ASTM D5185m	20179	37812	21078	---
Visc @ 40°C	cSt	ASTM D445	333	335	60.0	---

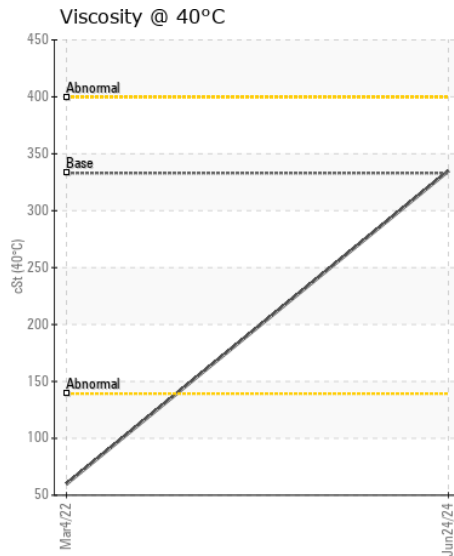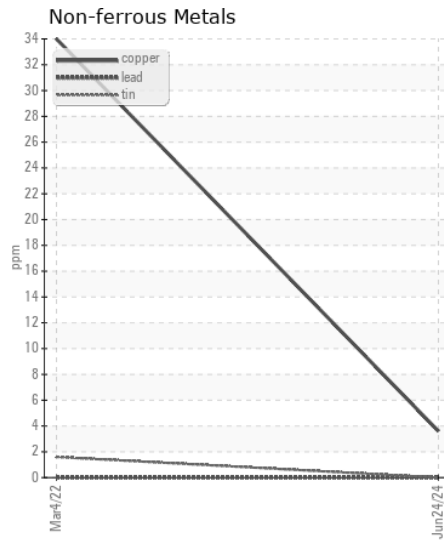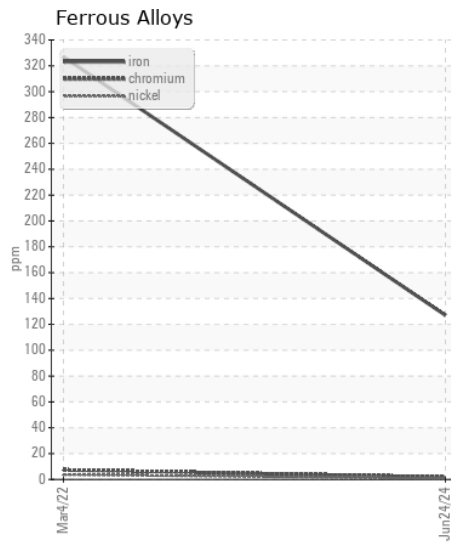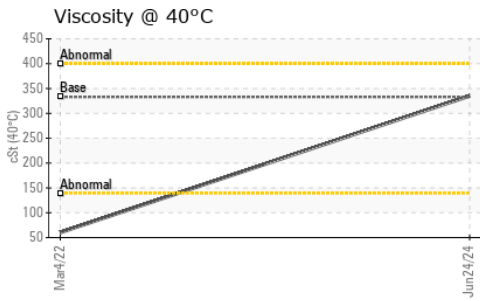

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0003145
Lab Number : 06221695
Unique Number : 11099892
Test Package : CONST

Received : 26 Jun 2024
Tested : 27 Jun 2024
Diagnosed : 28 Jun 2024 - Don Baldrige

160 - ASCENDUM MACHINERY INC - MILLS RIVER
 215 FANNING FIELDS RD
 MILLS RIVER, NC
 US 28759
 Contact: BRANDON DRAKE
 brandon.drake@ascendummachinery.com
 T: 8(286)687-0620
 F: (828)687-0622

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)