



ASCENDUM

OIL ANALYSIS REPORT

WEAR

ABNORMAL

CONTAMINATION

NORMAL

FLUID CONDITION

NORMAL



Area

Ascendum Machinery/500 Hour CSA

Machine Id

VOLVO A40G 2332 (S/N A40GV752022)

Component

Transmission (Auto)

Fluid

DEXRON III (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0011108	ASC0008597	ASC0002667
Sample Date		Client Info		24 Jun 2024	15 Feb 2024	01 Dec 2023
Machine Age	hrs	Client Info		2033	1462	1107
Oil Age	hrs	Client Info		2033	1462	1107
Filter Age	hrs	Client Info		1033	462	1107
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

Moderate concentration of visible metal present. All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	49	<1	39
Chromium	ppm	ASTM D5185m	>5	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	3	0	3
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	26	2	16
Lead	ppm	ASTM D5185m	>50	0	0	0
Copper	ppm	ASTM D5185m	>225	32	0	26
Tin	ppm	ASTM D5185m	>10	4	0	3
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	▲ MODER	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	13	1	13
Potassium	ppm	ASTM D5185m	>20	3	1	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	0	3
Boron	ppm	ASTM D5185m		67	106	71
Barium	ppm	ASTM D5185m		<1	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	<1
Manganese	ppm	ASTM D5185m		4	0	3
Magnesium	ppm	ASTM D5185m		0	1	1
Calcium	ppm	ASTM D5185m		70	72	94
Phosphorus	ppm	ASTM D5185m		198	189	191
Zinc	ppm	ASTM D5185m		6	<1	0
Sulfur	ppm	ASTM D5185m		2051	1905	1839
Visc @ 40°C	cSt	ASTM D445	35.0	27.8	29.0	28.1

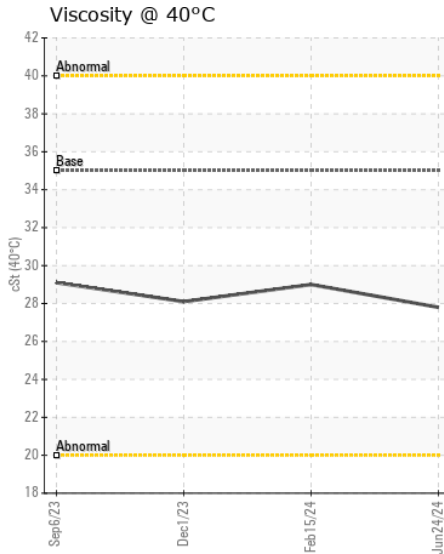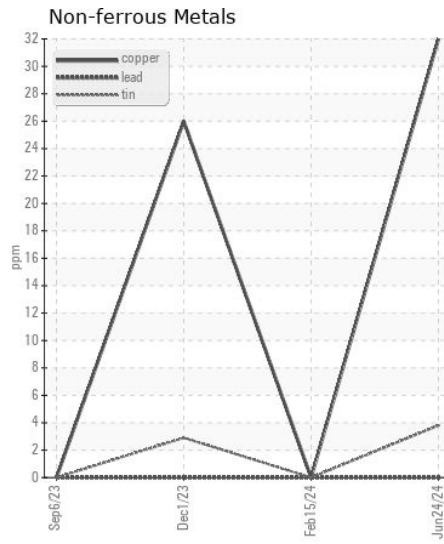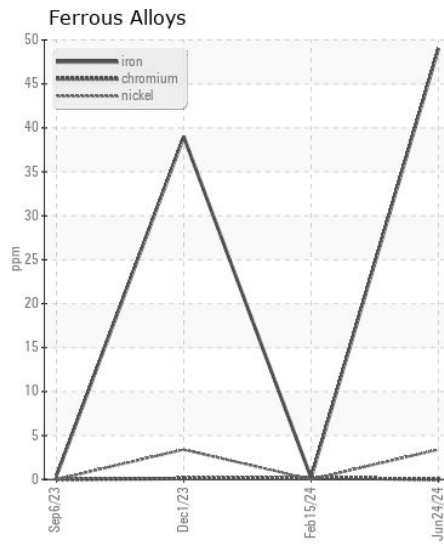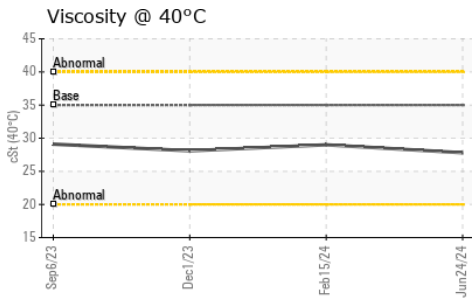

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0011108
Lab Number : 06221727
Unique Number : 11099924
Test Package : CONST
Received : 26 Jun 2024
Tested : 27 Jun 2024
Diagnosed : 28 Jun 2024 - Don Baldrige

G S MATERIALS INC
 PO BOX 1335
 BURLINGTON, NC
 US 27216

Contact: KAREN NEWPORT
 Gsmaterials@windstream.net
 T: (919)499-9322
 F: (919)499-2097

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)