



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[2014]
 Machine Id
VOLVO L120H 632190
 Component
Transmission (Auto)
 Fluid
VOLVO AT 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP434492	VCP401503	VCP384133
Sample Date		Client Info		20 Jun 2024	12 Oct 2023	05 Jan 2023
Machine Age	hrs	Client Info		9575	8550	7550
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	61	63	64
Chromium	ppm	ASTM D5185m	>5	0	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	0	0
Aluminum	ppm	ASTM D5185m	>50	25	26	25
Lead	ppm	ASTM D5185m	>50	0	0	<1
Copper	ppm	ASTM D5185m	>225	12	11	13
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	9	10	9
Potassium	ppm	ASTM D5185m	>20	2	2	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	8	4
Boron	ppm	ASTM D5185m	187	47	54	60
Barium	ppm	ASTM D5185m	0.0	<1	0	2
Molybdenum	ppm	ASTM D5185m	0.0	0	0	<1
Manganese	ppm	ASTM D5185m	0.0	3	3	3
Magnesium	ppm	ASTM D5185m	6.8	1	0	2
Calcium	ppm	ASTM D5185m	215	68	75	73
Phosphorus	ppm	ASTM D5185m	445	175	123	174
Zinc	ppm	ASTM D5185m	56	26	14	24
Sulfur	ppm	ASTM D5185m	1336	1549	1444	1379
Visc @ 40°C	cSt	ASTM D445	35.3	25.2	25.6	25.6

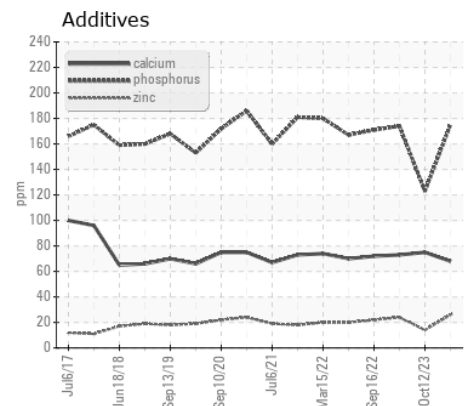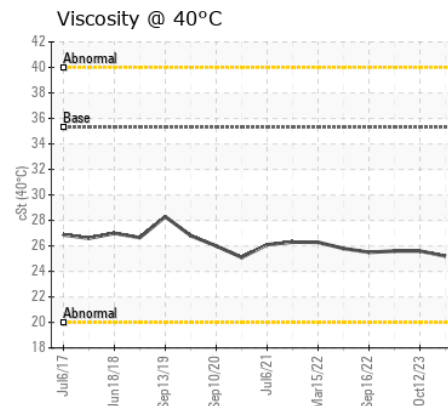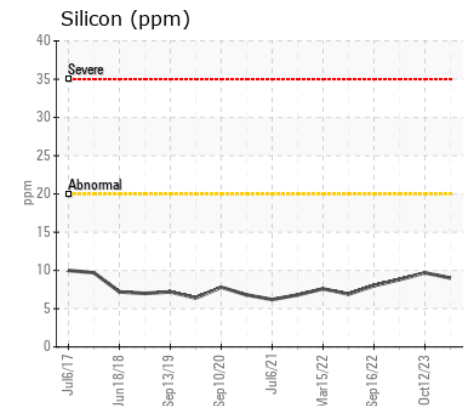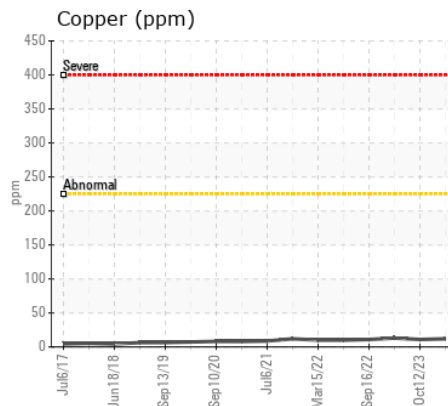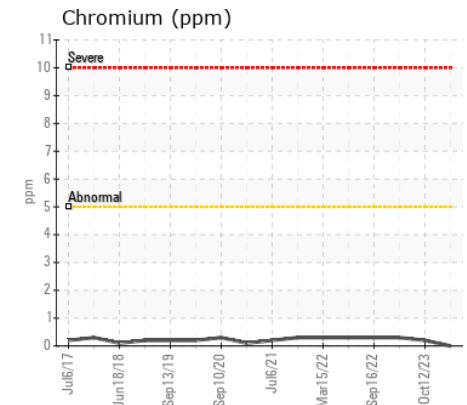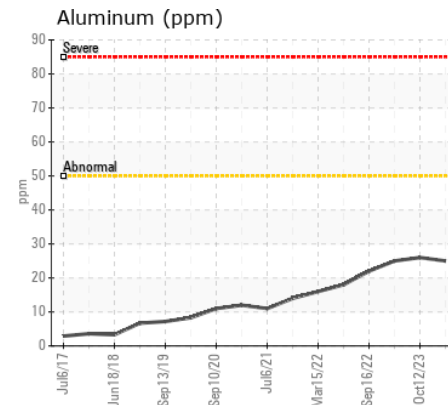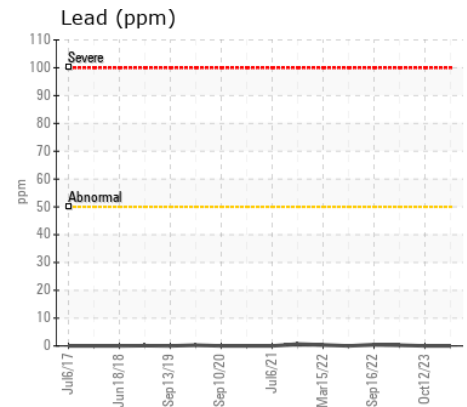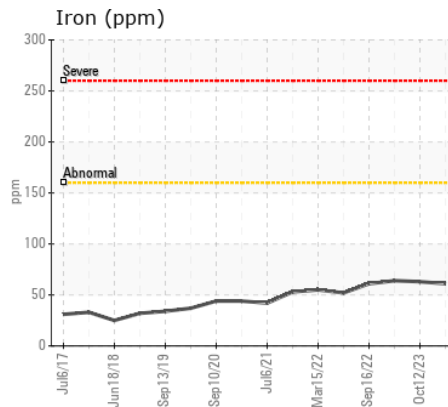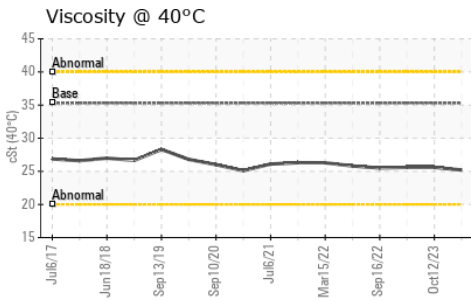

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP434492
Lab Number : 06221743
Unique Number : 11099940
Test Package : MOB 1

Received : 26 Jun 2024
Tested : 27 Jun 2024
Diagnosed : 27 Jun 2024 - Wes Davis

LEONARDS CONTRACTING
 30850 STEPHENSON HWY
 MADISON HEIGHTS, MI
 US 48071
 Contact: LARRY SCHRADER
 larry.schrader@sdevelop.com
 T: (810)499-1953
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)